PX-366 | E

IMPORTANT

"B" Holes must be drilled FIRST, centered between 2nd & 3rd louvre from top. Then measure 49 7/16" down to establish correct base. All other machining taken from center of piece. (29 7/8 from base)

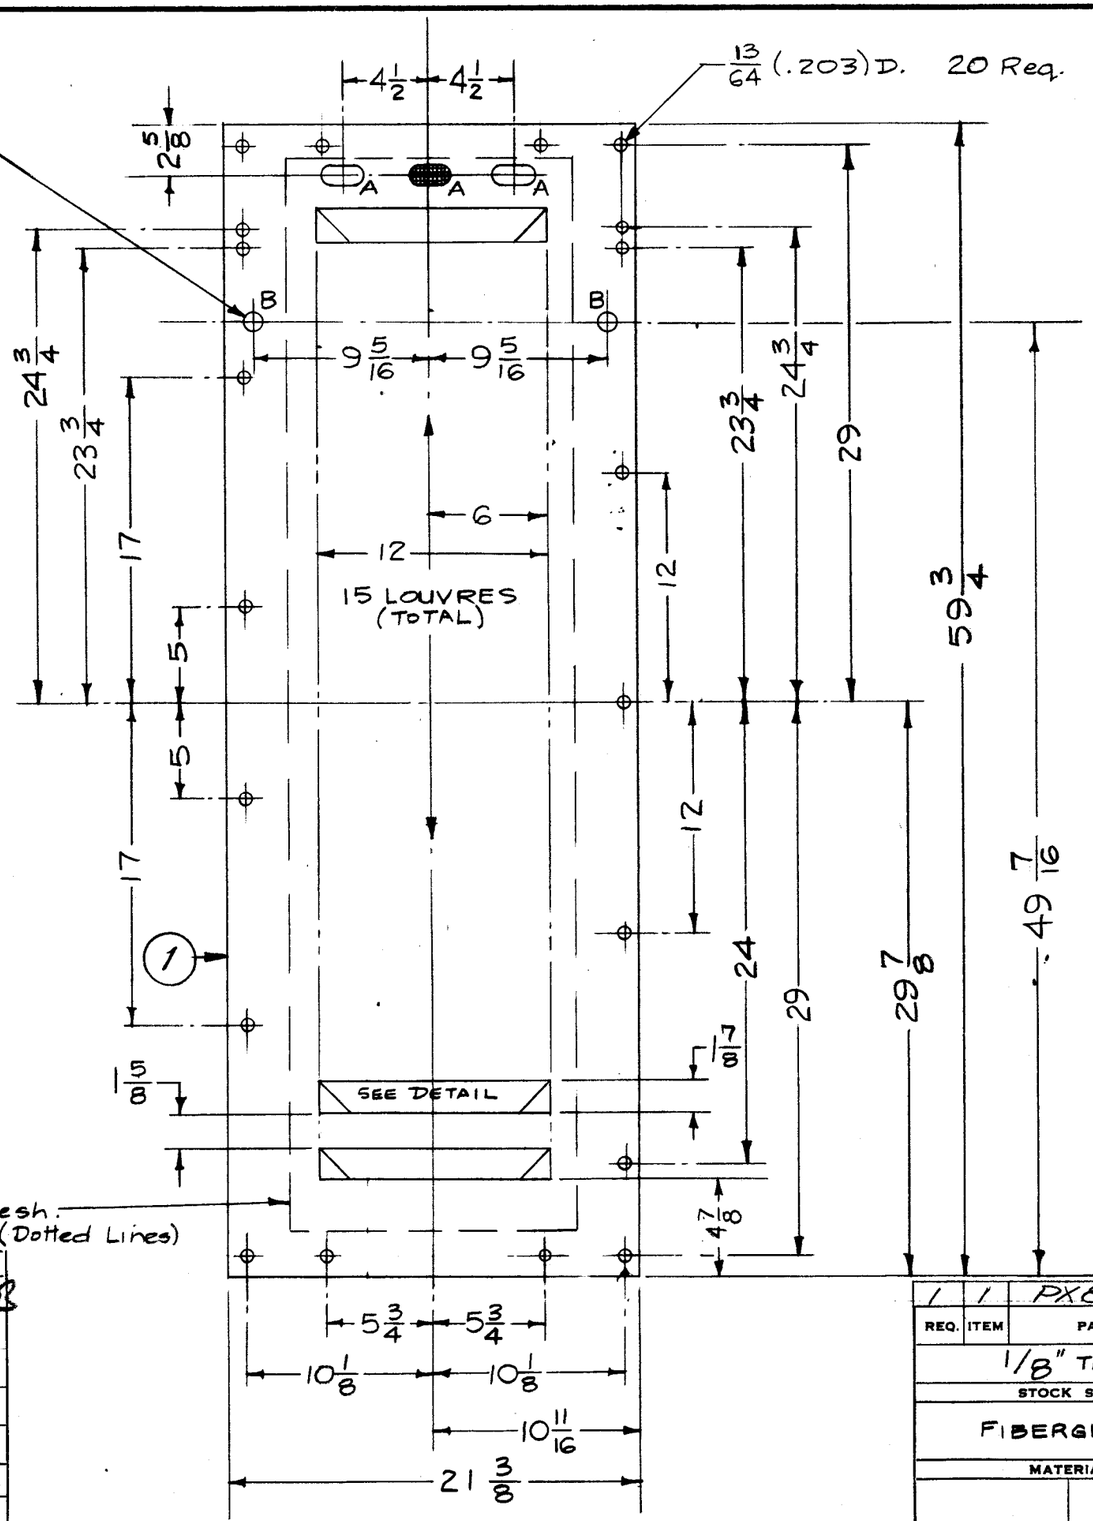

"A" HOLE - 1" x 3" SLOT - 3 Req.
"B" HOLE - 5/8 D. 2 Req.

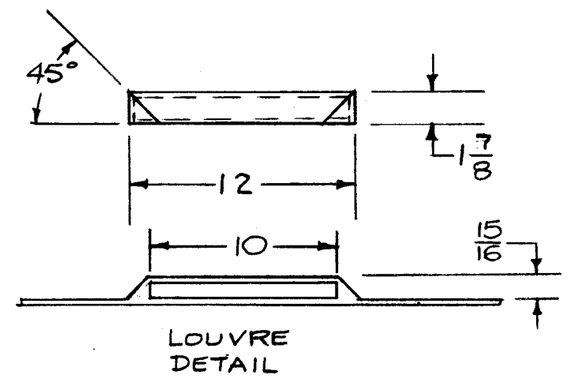

LOUVRE DETAIL

Fiberglas Screening - 16 Mesh.
Approx. 15" Wide x 56" Long (Dotted Lines)

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
E		ADDED ITEM 1	5-10-72	20686	GE		
D	1	NOTE ADD; DIM. 47/8 ADD.	1-13-65	13290	RL		
C	1	25/8 SLOT WAS 2 3/4 49 7/16 Base WAS 49 9/16 29 7/8 CL WAS 30 59 3/4 OA WAS 60	2/1/59	732	16		
B	2 1	1 7/8 WAS 1 5/8 1 5/8 WAS 1 7/8	7/15/57	2			
A	1	"IMPORTANT" NOTE ADDED	6/13/57	1	16		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: 1/8

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
2	TER-5000		A-1431 (8)	5-21-57

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	1	PX892	PANEL, BLANK	

1/8" THK.
STOCK SIZE

FIBERGLAS
MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

PANEL, SIDE
(TER-5000)

DRAWN	CHECKED	FINAL APPROVAL
16 5-21-57		

ELEC. DES. APP. | MECH. DES. APP.

PX-366 | E