


THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	1
MODEL	HFR-1/T
ASSY. NO.	A-2496
DATE	6-9-62

USED ON
AC 168 A

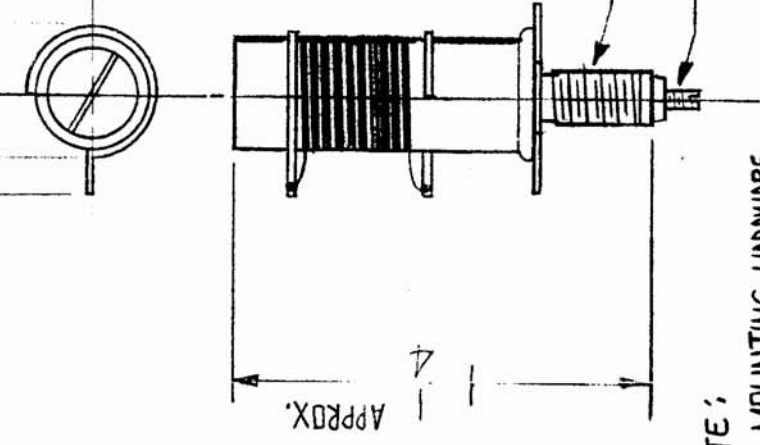

APPROX.

NOTE:
MOUNTING HARDWARE
SUPPLIED BY MFG

MODEL	REQ.	FUNCTION.	FREQ (MC)	SYMBOL
HFR-1	1	BAND*2 OSC.	4.75 - 5.75	L1021

ELECTRICAL SPECIFICATIONS

TEST FREQ. 25 MC
 MAX. IND - 0.96 μ h (REF)
 MIN. IND - 0.46 μ h (REF)
 Q - 80 MIN @ MIN L

MECHANICAL SPECIFICATIONS

COIL FORM CERAMIC (STUD MTG)
 9 - TURNS
 AWG #24 MAGNET WIRE

SCHEMATIC



REQ. ITEM	PART NO.	ANGER DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		COIL, RF, TUNED	
DATE	CH. NO.	DRAFTS	CHECKER
10-3-66	16958		RUBIN
SCALE:	A-2496	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND FINISH EDGES.	
DESCRIPTION	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON		
	FRAC. $\pm 1/64$ DEC. $\pm .005$ ANGLES $\pm 1/2^\circ$		
TYPE & TEMPER	HEATTREAT. SPEC.	RUBIN	JUN 6/3/63
DRAWN	CHECKED	J. ANGER	VFH
FINAL APPROVAL			AC 168 A