
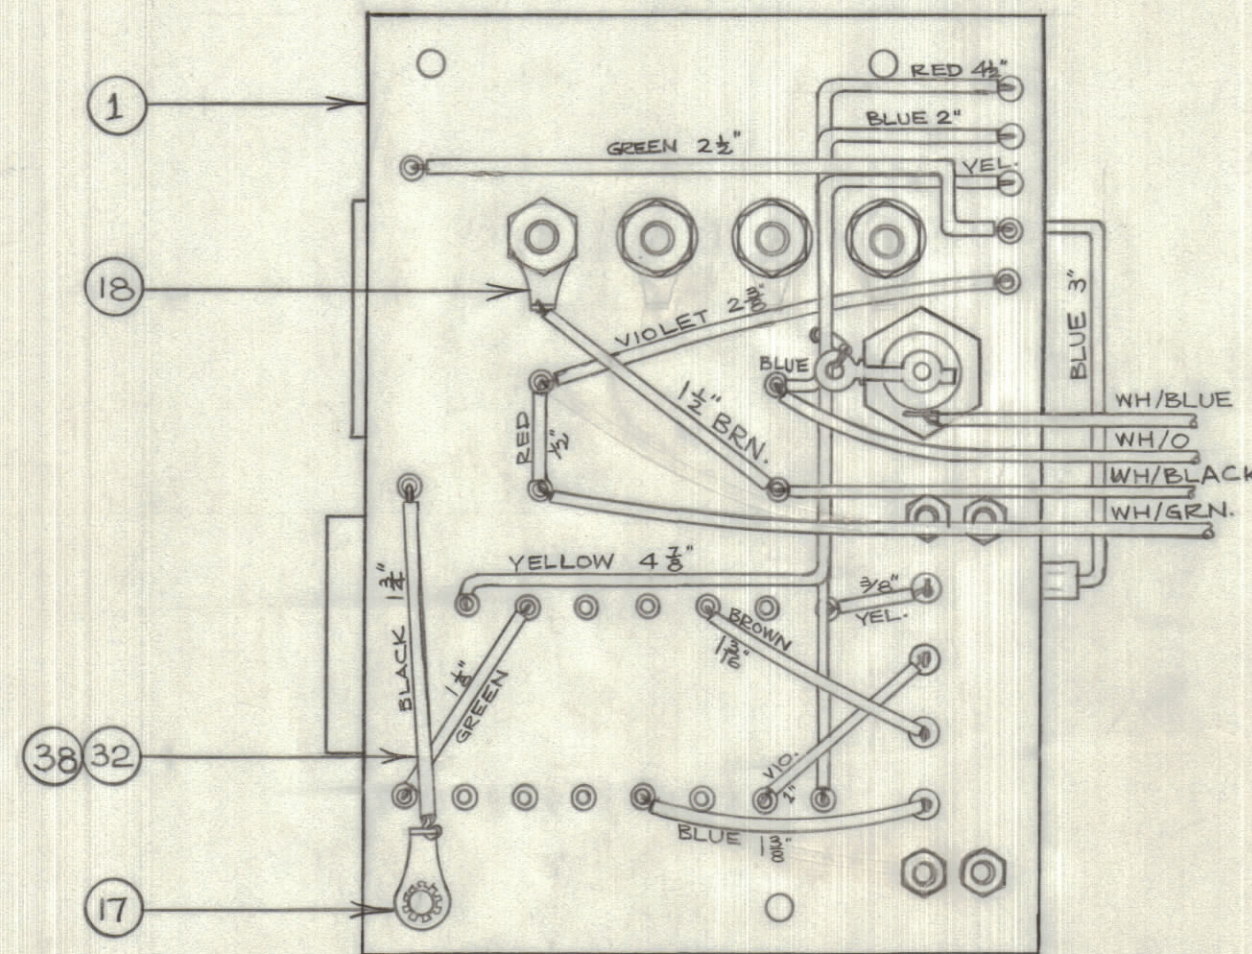


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
B		REDRAWN PARTS LIST ADDED	3/23 1962		JPC	JL	144
C		IT. 1 WAS PM10060 IT. 3 WAS FH10001-1	1-19-66	15546		JCB	

REQ	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	1	PP-10060	Terminal Board, Ref. LD-10108	
1	2	TM-100-4	Terminal Board, Barrier Type	E101
1	3	FH-100-1	Fuse Holder, Ref. Fuse 1/4 amp.	F102
4	4	RX-10002	Rectifier: silicon	CR101 TO CR104
1	5	IN478	Diode: Germanium	CR105
4	6	RC20GF154K	Resistor: fixed, composition	R101 TO R104
1	7	RC42GF471K	Resistor: fixed, composition	R105
1	8	RC42GF241K	Resistor: fixed, composition	R106
1	9	RC20GF103K	Resistor: fixed, composition	R107
5	10	RC20GF392K	Resistor: fixed, composition	R108 TO R112
1	11	CE-10003-1	Capacitor: fixed, electrolytic	C102
1	12	CE-10003-2	Capacitor: fixed, electrolytic	C103
1	13	TE-120-2	Spade Lug	
1	14	MS-154-1	Straddle Plate	
4	15	SCBP0632BN10	Screw: 6-32 5/8" LONG	
4	16	NTH0632BN8	Nut: hexagon	
1	17	TE-10011-2	Solder Lug: 6-32	
1	18	TE-10011-3	Solder Lug: 8-32	
4	19	LWE06MRN	Lockwasher: external	
3	20	PX-104-7-034	Sleeving: 3/4" long grey	
1	21	PX-104-2-034	Sleeving: 3/8" long yellow	
1	22	PX-104-3-034	Sleeving: 1/2" long red	
1	23	PX-104-4-034	Sleeving: 1-1/8" long green	
1	24	PX-104-5-034	Sleeving: 1-3/16" long brown	
1	25	PX-104-6-034	Sleeving: 1-3/8" long blue	
1	26	PX-104-6-034	Sleeving: 2" long blue	
1	27	PX-104-7-034	Sleeving: 2-1/4" long grey	

REQ	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	28	PX-104-9-034	Sleeving: 2-3/8" long violet	
1	29	PX-104-4-034	Sleeving: 2-1/2" long green	
1	30	PX-104-3-034	Sleeving: 4-1/2" long red	
1	31	PX-104-2-034	Sleeving: 4-7/8" long yellow	
1	32	PX-104-1-042	Sleeving: 1-3/4" long black	
1	33	MWC20(7)U90	Wire: insulated " long, wh/bk	
1	34	MWC20(7)U93	Wire: insulated " long, wh/or.	
1	35	MWC20(7)U95	Wire: insulated " long, wh/grn.	
1	36	MWC20(7)U96	Wire: insulated " long, wh/blue	
1	37	MWC22(7)U6	Wire: insulated 3" long, blue	
1	38	WL-100-5	Wire: Buss-Bar, tinned # 18, 1-3/4" long	
AR	39	WL-100-6	Wire: Buss-Bar, tinned # 20, (For use in all sleeving PX-104- -034)	
1	40	PX-104-9-034	Sleeving: 1" long, violet	
1	41	PX-104-5-034	Sleeving: 1 1/2" long, brown	

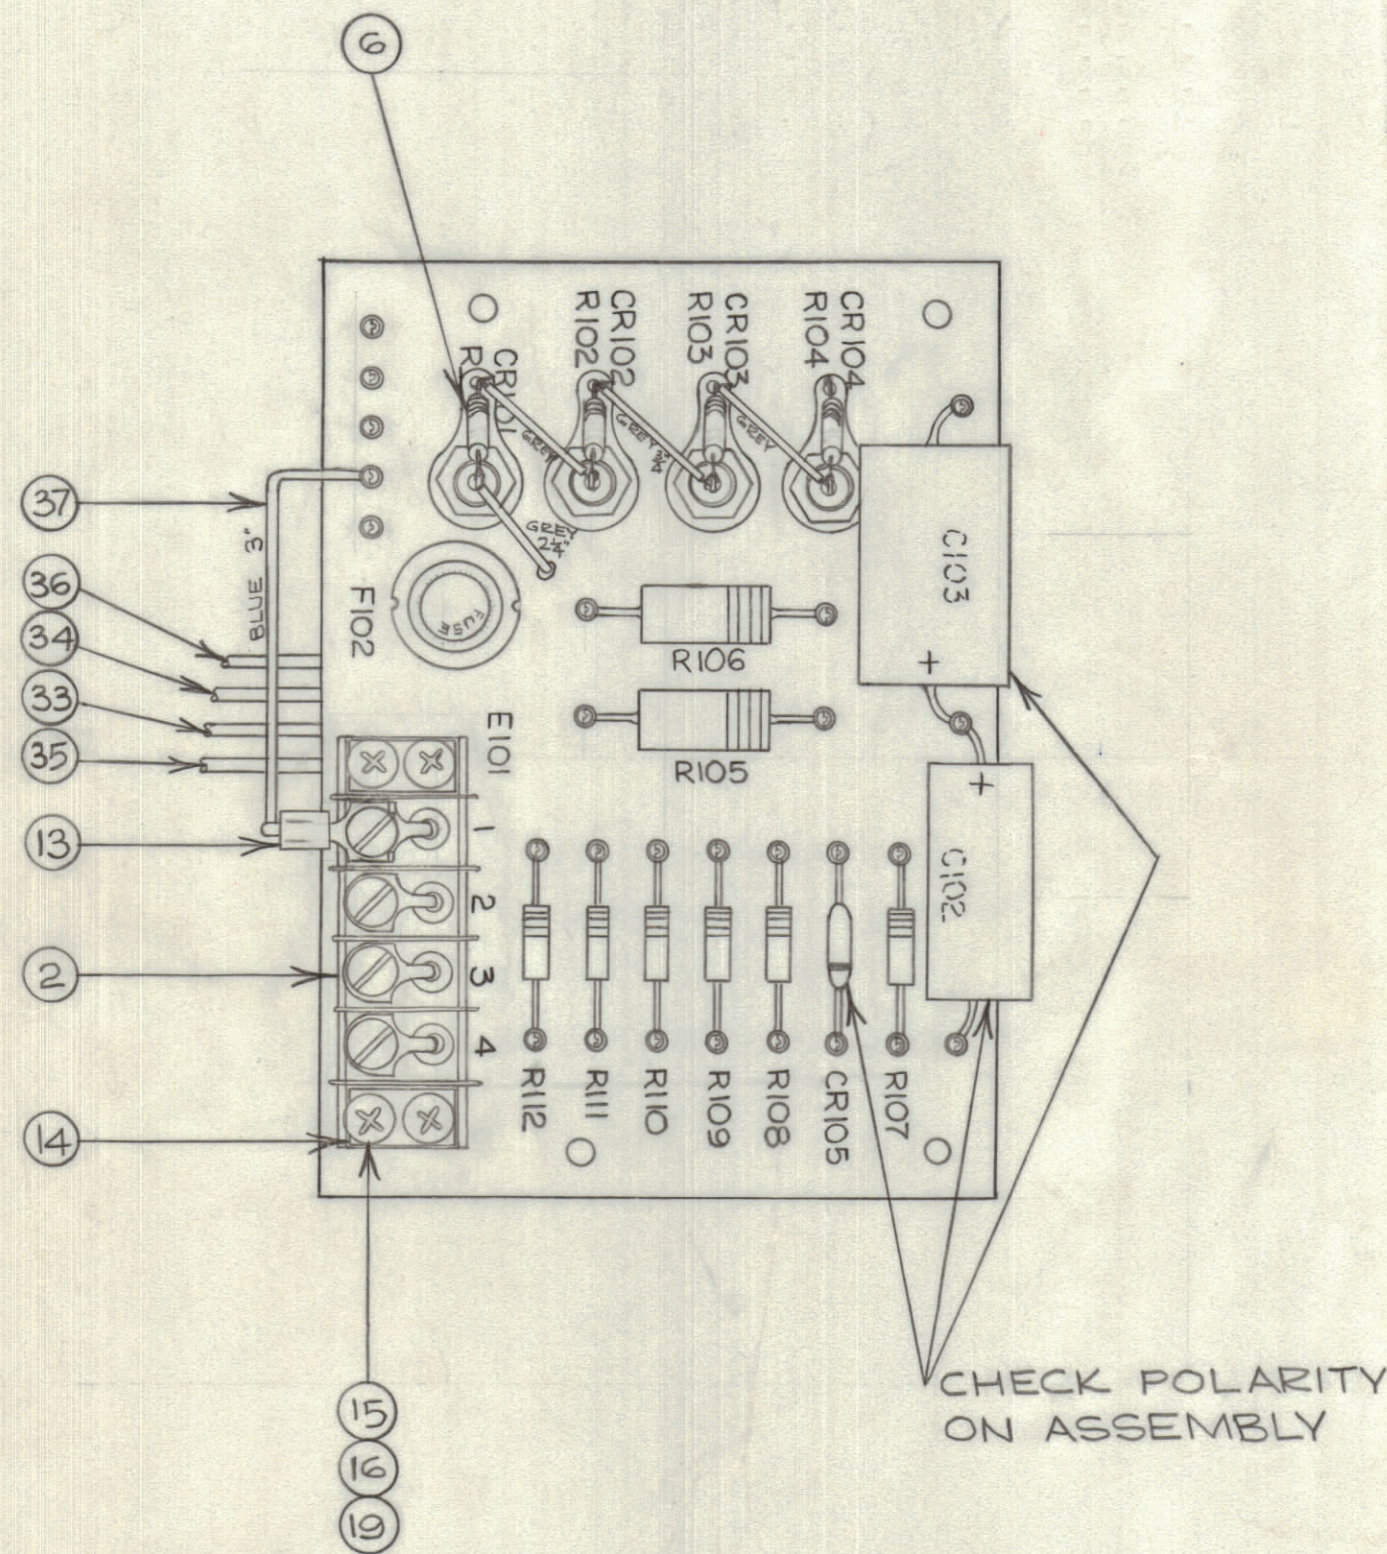

NOTE:

LENGTHS OF WIRE IN PARTS LIST DOES NOT INCLUDE EXTRA LENGTH FOR STRIPPING.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

BAA-1			March 23/62
MODEL	PROJECT NO.	ASS. Y. NO.	DATE
USED ON			

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		TERMINAL BOARD ASSEMBLY	
WEIGHT PER PC.		JPC	144
TYPE & TEMPER		DRAWN	ELEC. DES. APP.
HEAT TREAT. SPEC.		JL	MECH. DES. APP.
FINISH & SPEC. NO.		CHECKED	FINAL APPROVAL
			A10193 C