
A 10427


| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|-------|------|---------------|---------------|---------|--------|---------|-----------|------|------|------------|-------------------------|--------|
| Ø | | REL. TO PROD. | MAR. 28/66 | | GΝ | | (RZ) | 1 | ١ | MS10647 | XTAL, MOUNTING BRKT. | |
| Ą | | REV TO CEMN | 4/7/67 | 249 | AP | 22.Co. | W) | 2 | 2 | JJ219-18-9 | JACK, TIP, SUBMINIATURE | |

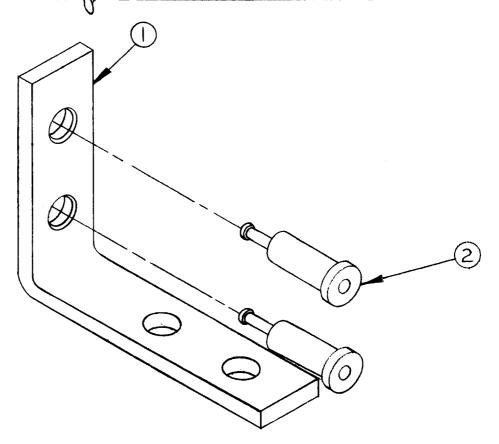

| | 005/66 | | | MAR. 25/66 | | | TMC(Canada)LIMITED | | | |
|--------|---|-------------|--|-------------------|---------------|----------------|--------------------|----------------|---------------------------------------|--|
| MC | DDEL | PROJECT NO. | ASS'Y. NO. | DATE | STOCK SIZE | | OTTAWA | (0) = 1 | ONTARIO | |
| | USED ON | | | | | | ASSEN | MBLY, BRACK | ET | |
| MAXIM | AXIMUM ALLOWABLE TOLERANCES HAVE BEEN Etermined and deviations will be cause for Ejection. Remove all burrs and sharp edges | | 1 | SIRABLE TO CHANGE | MATERIAL | WEIGHT PER PC. | | | · · · · · · · · · · · · · · · · · · · | |
| _ | | | ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY | | | | GAM | T | <u> </u> | |
| | | | THE PURCHASER PROMPTLY. | | TYPE & TEMPER | | DRAWNS | ELEC. DES. APP | MECH. DES. APP. | |
| | | TOLERANCES | SCALE NTS | | | | PRA | 69 |) | |
| ALL | DEC. DIM. ± | | DIMENSIONS UNLESS OTHER | | HEAT TREAT | r. SPEC. | CHECKED | FINAL APPI | TOVAL | |
| OTHERS | 1 + | | OMMERCIAL STOCK | | Ì | PLUMMER | A-1042 | 7 A | | |
| | ANGULAR DIM. ± | | SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED. | | FINISH & S | PEC. NO. | | M 1042 | - ' | |

A10428

| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|-------|--------------|--------------|---------|---------|--------|---------|-----------|------|------|-----------|---------------------------------|--------|
| Ø | REL. TO PROD | | 29-3-66 | | | | | 2 | + | FS119-2 | LATCHGUIDE, SNAPSLIDE, FASTENER | |
| | | | | | | | | 2 | 2 | FS118-1 | LATCH, SNAPSLIDE, FASTENER | |
| | | | | | | | | 4 | 3 | WA-131-22 | WASHER, SPRING, TENSION | |
| | | | | | | | | 2 | 4 | FS 120-1 | POST, SNAPSLIDE, FASTENER | |
| | | | | | | | j | ١ | 5 | M510687 | PANEL, FRONT | |

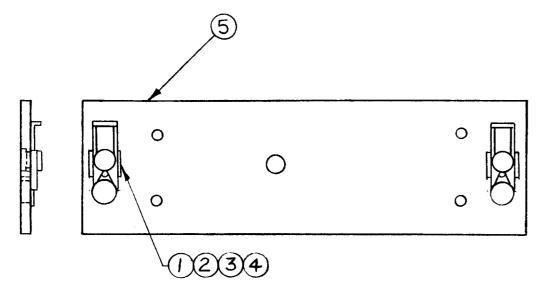




ES:

- ZINC CHROMATE PRIMER SMOOTH GRAY ENAMEL

| TTR | 75 | 005/66 | | MAR.29/66 | | | TMC | (Canada)LIMI | TED | | | | |
|---------------|---|---------------------------|------------------------------|--|--------------------|-------------------|--------------|---------------------------|-----|-------------|--|--|--|
| Мо | DDEL | PROJECT NO. | ASS'Y. NO. | ASS'Y. NO. DATE | | STOCK SIZE | | OTTAWA ONTARIO | | | | | |
| | | USED | | | - | ASSEMB | LY, PANEL, F | RONT | | | | | |
| | IF IT IS FOUND DESIRABLE TO CHANG | | | ľ | MATERIAL | WEIGHT PER PC. | | | | | | | |
| DETERM | AXIMUM ALLOWABLE TOLERANCES HAVE BEEN ETERMINED AND DEVIATIONS WILL BE CAUSE FOR | | ANY TOLERANCE | ESTRABLE TO CHANGE OR OTHER DETAIL OR DRAWING NOTIFY | | | | , | | | | | |
| REJECT | ION. REMOVE | ALL BURRS AND SHARP EDGES | | ASER PROMPTLY. | TYPE & T | EMPER | GAM | | | | | | |
| | | | <u> </u> | | | | DRAWN | ELEC. DES. APP. MECH. DES | | S. APP. | | | |
| | | TOLERANCES | SCALE NTS | | | | PIN | FINAL AFFROVAL | | | | | |
| | DEC. DIM. | ± | DIMENSION | | HEAT TREAT | HEAT TREAT. SPEC. | | | | | | | |
| ALL OTHERS | | . ± | | WISE SPECIFIED | SEE NOT | _ | PLUMMER | | | 1 | | | |
| J.,,,_, | | | 1 | OMMERCIAL STOCK | | | | A 1042 | 28 | Ø | | | |
| | ANGULAR DIM. ± | | TOLERANCES ARE NOT INCLUDED. | | FINISH & SPEC. NO. | | | JA 10 12 | | 1 1 | | | |

| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. A | PP. | REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|-------|------|--------------|---------|---------|--------|---------|--------|-----|------|------|-----------------|------------------|--------|
| Ø | | REL TO PROD | 20-4-66 | | RD | | (PJ |) | / | 1 | LD10194/M510609 | BRACKET, POT MTG | |
| | | | | | | | | | 4 | 2 | TE 164-1 | NUT, CLINCH | |

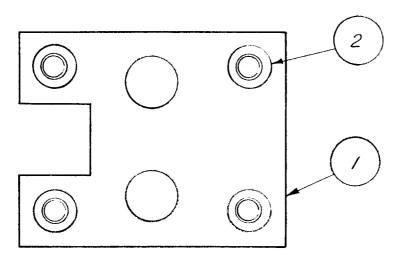


LETTERING, LOCATED ON OPPOSITE SIDE


| LMC | 20 | 046/66 | A10376 | 20APR 66 | | | | | | | |
|-------------|--|-------------|-------------------|--|-------------------------|-----------|--------------------|-----------------|------------|------|--|
| AMC | 20 | 020/66 | | | | | TMC | (Q /) | ITED | | |
| MC | ODEL | PROJECT NO. | ASS'Y. NO. | DATE | STOCK SIZE | | TMC(Canada)LIMITED | | | | |
| | USED ON | | | | | | ASSEMBLY, BRACKET | | | | |
| | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES | | 1 117 701 574 115 | ESIRABLE TO CHANGE | MATERIAL WEIGHT PER PC. | | POT MOUNTING | | | | |
| | | | SPECIFIED ON T | HIS DRAWING NOTIFY ASER PROMPTLY. | TYPE & | TEMPER | RD | | | | |
| | · · · · · · · · · · · · · · · · · · · | TOLERANCES | SCALE NT | .5 | | + | DRAWN | ELEC. DES. APP. | MECH. DES. | APP. | |
| | DEC. DIM. ± ALL FRAC. DIM. ± ANGULAR DIM. ± | | | IS IN INCHES | HEAT TREAT. SPEC. | | CHECKED | FINAL APPI | ROVAL | | |
| OTHERS | | | SIZES AND I | COMMERCIAL STOCK MANUFACTURERS IRE NOT INCLUDED. | FINISH & S | SPEC. NO. | COOK | A 104 | 158 | Ø | |

11 1044 5

| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|-------|------|--------------|---------|---------|--------|---------|-----------|------|------|------------------|-----------------------|--------|
| Ø | | REL TO PROD | 15-6-66 | | RD | | (KL) | / | 1 | PL 259A-TEF | PLUG | |
| A | / | WAS PL10009 | 17-6-66 | | RD | 20 | YPP | / | 2 | RC20GF 510V | RESISTOR, COMP, 1/2 W | |
| | 1 | | | | | | | / | 3 | LD 10226/HB10001 | BUTTON | |

TRIMMING RESISTOR LEADS



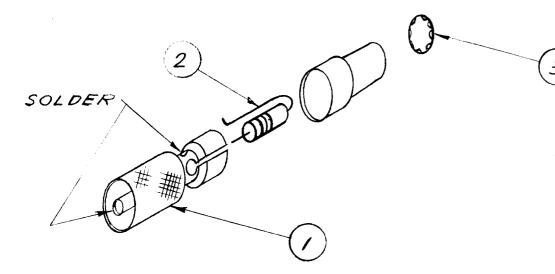

NOTE:

WHEN ASSEMBLED "ITEM 3" TO BE SPOT SOLDERED NEATLY TO "ITEM I"

| DLIO | MODEL PROJECT NO. ASS'Y. NO. DATE | | 31 MAY 66 | | | TMC | C(Canada) | IMITE | D | | |
|---------------|---|-----------|--|-----------------|-------------------|----------|--|------------------------|-------------|--------------|-----|
| MO | | | DATE | ATE STOCK SIZE | | OTTAWA | - (| ada)LIMITED ONTARIO | | | |
| | USED ON | | | | | | A55Y | DL1000 | o 8 | | |
| | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY. | | | MATERIAL | WEIGHT PER PC. | | | | | | |
| | | | · • | | | | | | | | |
| | | | | | TYPE & TEMPER | | RD | | | | |
| | | | ļ | | | | DRAWN | ELEC. DES. AP | ME | H. DES. APP. | PP. |
| | Т | OLERANCES | SCALE NT5 | | | | The state of the s | | | | |
| | DEC. DIM. ± ALL THERS FRAC. DIM. ± ANGULAR DIM. ± | | DIMENSIONS UNLESS OTHERY | | HEAT TREAT. SPEC. | | CHECKED | FIN | AL APPROVAL | | |
| ALL OTHERS | | | | DMMERCIAL STOCK | | [| AUBREY | | 0 4 0 0 | | |
| | | | SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED. | | FINISH & SI | PEC. NO. | | A/ | 0485 | A | 1 |