


NOTES:

- (1) MATERIAL: PLASTIC SHEET LAMINATED COPPER CLAD, FL-GE062 C2/2
- (2) CONTACTS ON EDGE BOARD CONNECTOR TO BE PLATED WITH A MINIMUM OF .0001 OF GOLD
- (3) BALANCE ON CONDUCTIVE PATTERN TO BE:
 - (A) PLATED WITH A MINIMUM OF .0003 TIN LEAD
 - (B) COATED WITH A MINIMUM OF .0003 SOLDER ON BOTTOM PATTERN ONLY
- (4) TO BE IN ACCORDANCE WITH TMC SPEC. S735

REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DF FT	CHKD APPD
Ø		REL. TO PROD.	DEC 6/67		RPL	W W
A		REV. AS PER CEMN	JAN 30/68	339	AP	W W
B		REV AS PER CEMN	FEB 20/68	347	RPL	W W
C		REVISED PER CEMN	MAR 6/70	732	W	W
D		REVISED PER CEMN	DEC 29/70	886	RW	W
E		REVISED PER CEMN	1 SEPT 71	1054	LB	W
F		REVISED PER CEMN	4 JAN 73	1209	AWW	W ACS SOW

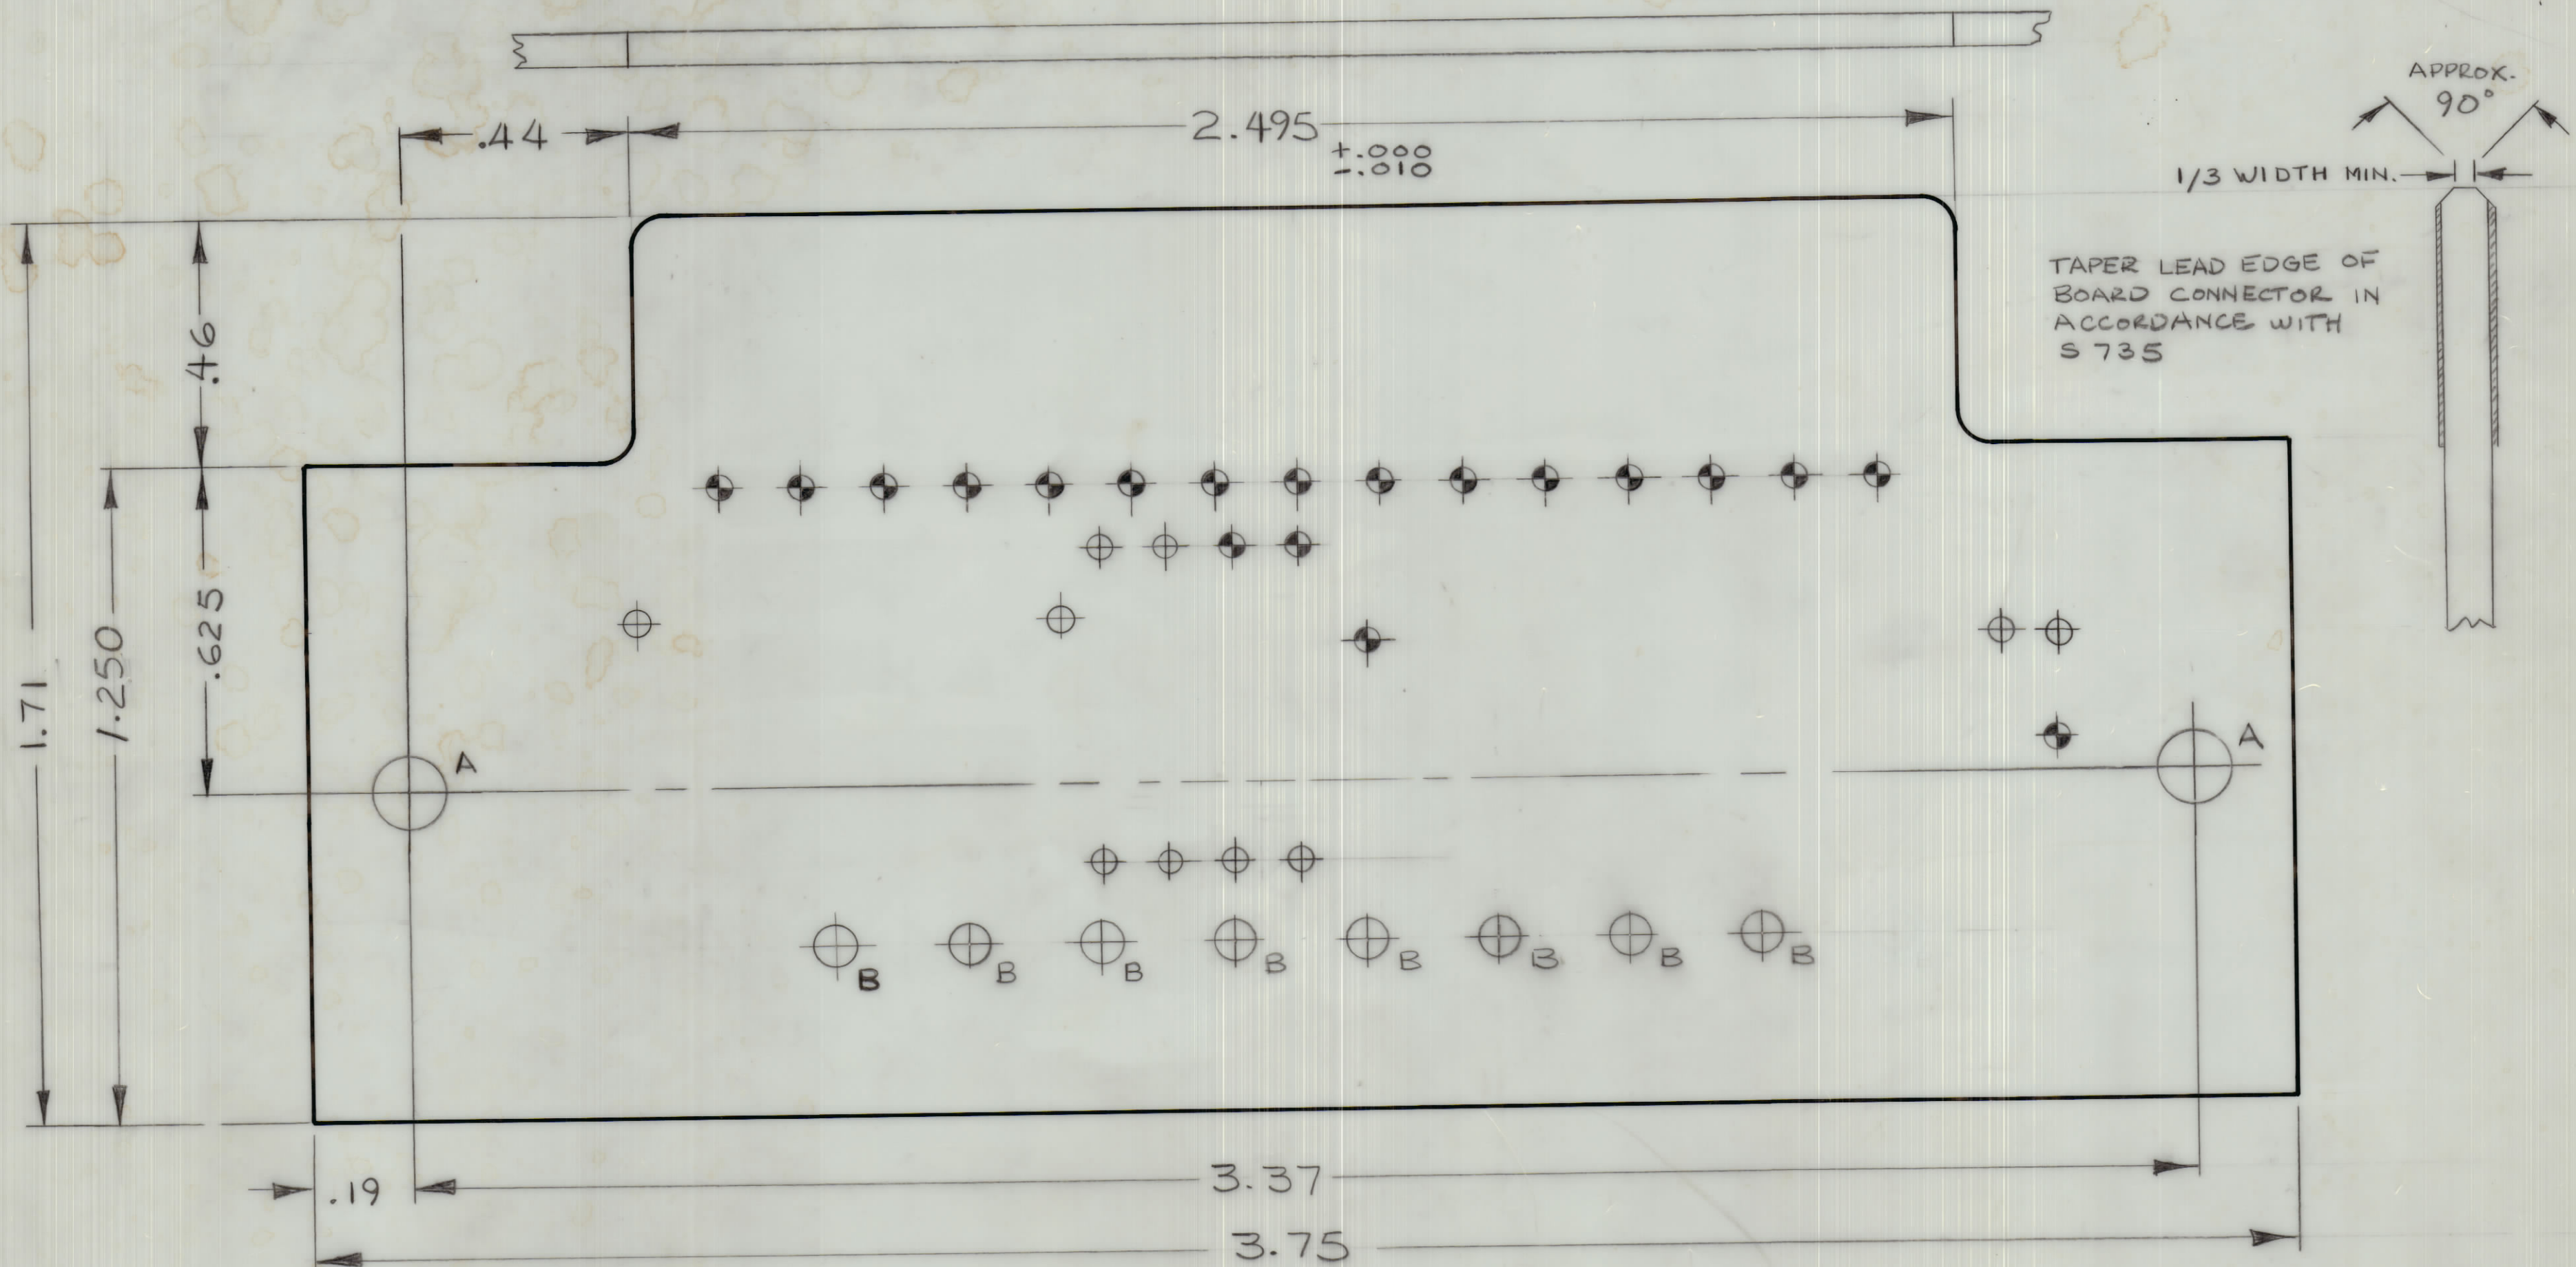

INDICATES INTERFACIAL CONNECTION DIA. IN HOLE TABLE INDICATES MIN DIA. AFTER PLATING OR EYLETING AS PER SUPPLIERS OPTION

(REF: A10672-1 FOR ETCHING)

HOLE	DESCRIPTION	REQ'D
A	9/64 DIA.	2
B	.078 DIA.	8
UNMARKED	.052 DIA.	29

SCALE 4:1

REF. BOTTOM PATTERN

MODEL		062/68	DATE	AUG 16/67	STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
PROJECT NO.		ASSY. NO.	USED ON		MATERIAL		POWER SUPPLY BD. AC (MACHINING)	
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		SEE NOTE 1		DRAWN		RPL
TOLERANCES		SCALE		TYPE & TEMPER		ELEC. DES. APP.		W
DEC. DIM. ± .X = .05		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		HEAT TREAT. SPEC.		MECH. DES. APP.		W
FRAC. DIM. ± 1/64 .XXX = .01		DRILL PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.		FINISH & SPEC. NO.		CHECKED		W
ANGULAR DIM. ± 0° 30' .XXX = .005						FINAL APPROVAL		W
ALL OTHERS						SHEET 3 OF 7		A10672-2