


NOTES:

- 1) MATERIAL: PLASTIC SHEET LAMINATED COPPER CLAD FL-GE062C2 /2
- 2) CONTACTS ON EDGE BOARD CONNECTOR TO BE PLATED WITH A MINIMUM OF .0001 OF GOLD.
- 3) BALANCE ON CONDUCTIVE PATTERN TO BE:
 - A) PLATED WITH A MINIMUM OF .0003 TIN LEAD
 - B) COATED WITH A MINIMUM OF .0003 SOLDER ON BOTTOM PATTERN ONLY
- 4) TO BE IN ACCORDANCE WITH SPEC. S 735.

| REVISIONS | | | | | | |
|-----------|-----|------------------------|--------|------------|-------|------|
| ZONE | SYM | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD |
| Ø | | RELEASED TO PRODUCTION | FEB 67 | | AP | |

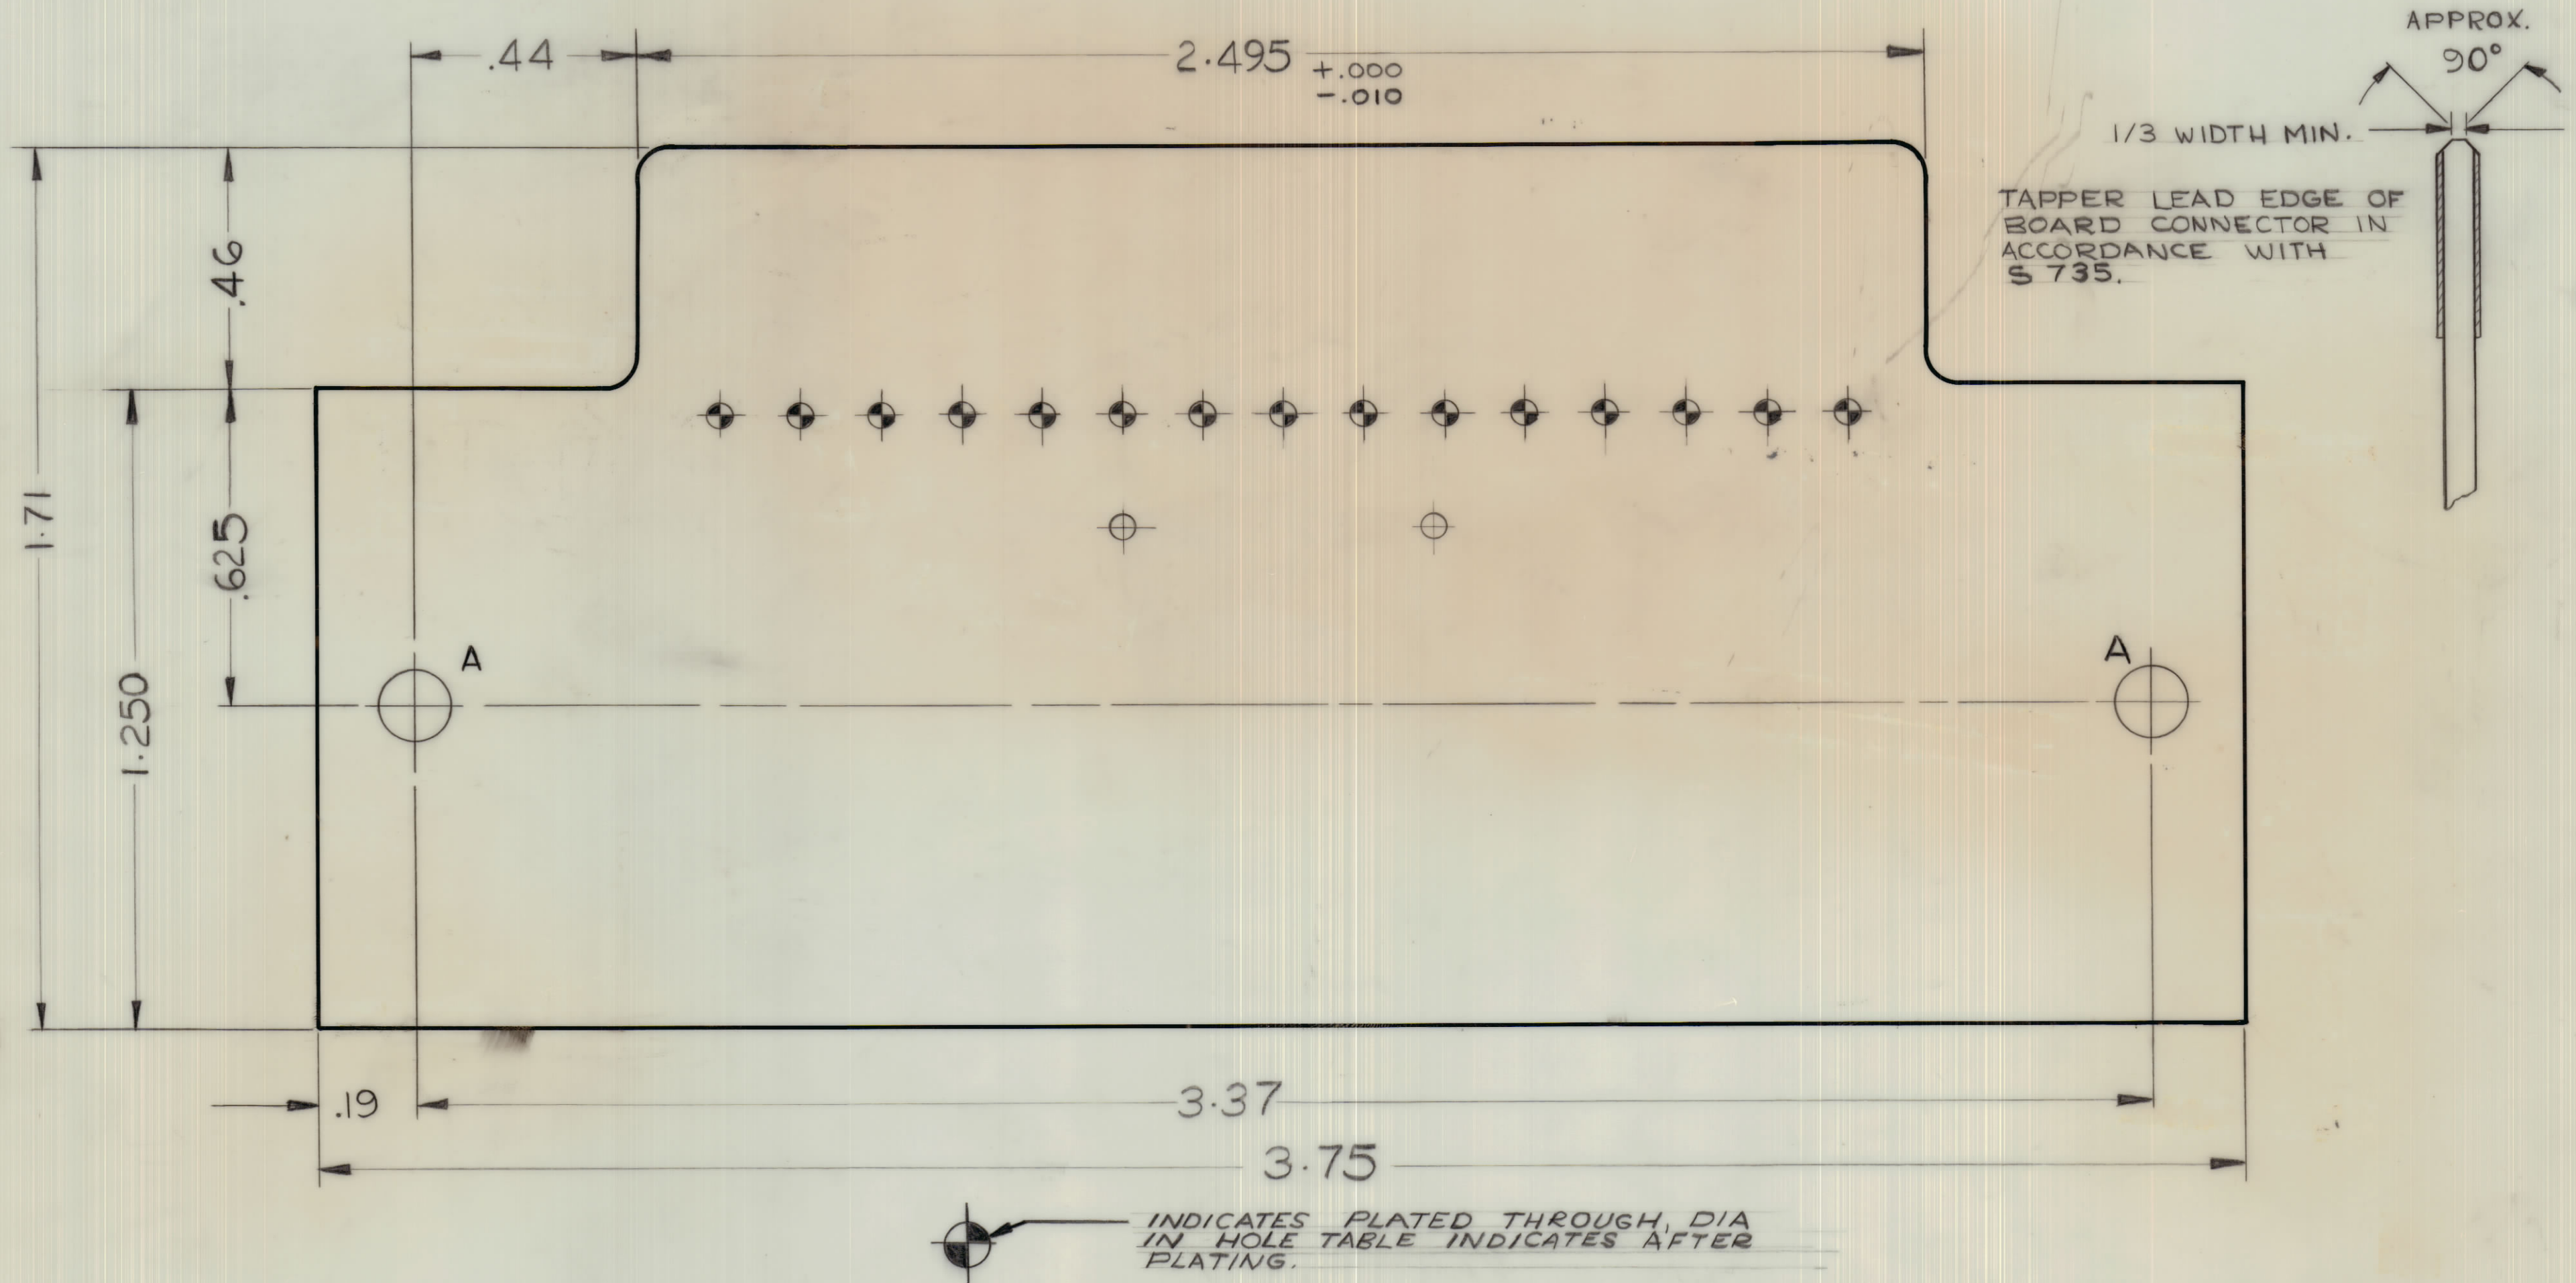

INDICATES PLATED THROUGH, DIA IN HOLE TABLE INDICATES AFTER PLATING.

(REF: A10674-1 FOR ETCHING)

| HOLE | DESCRIPTION | REQ'D |
|----------|-------------|-------|
| A | 9/64 DIA. | 2 |
| UNMARKED | .052 DIA. | 17 |

SCALE 4:1

REF. BOTTOM PATTERN

| | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------|-------------|------------|----------|----------------------------------------|--|
| STR-5 | 06216 | | NOV 9/67 | TMC (Canada) LIMITED OTTAWA ONTARIO | |
| MODEL | PROJECT NO. | ASS'Y. NO. | DATE | POWER SUPPLY | |
| USED ON | | | | BOARD (DC) (MACHINING) | |
| MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES | | | | AP | |
| | | | | DRAWN | |
| IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY. | | | | ELEC. DES. APP. | |
| | | | | MECH. DES. APP. | |
| TOLERANCES | | | | FINAL APPROVAL | |
| SCALE | | | | SHEET 3 of 4 | |
| ALL OTHERS | | | | A10674-2 | |
| DEC. DIM. ± | | | | Ø | |
| FRAC. DIM. ± | | | | | |
| ANGULAR DIM. ± | | | | | |
| DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED | | | | | |
| DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED. | | | | | |
| FINISH & SPEC. NO. | | | | | |