


DATE	BY	CHKD BY	APPROVED	DATE
0	REL TO PROD.			
A	REVISED AS PER COMM.	534		
B	CHANGES D	1448, 878, 774/14		806

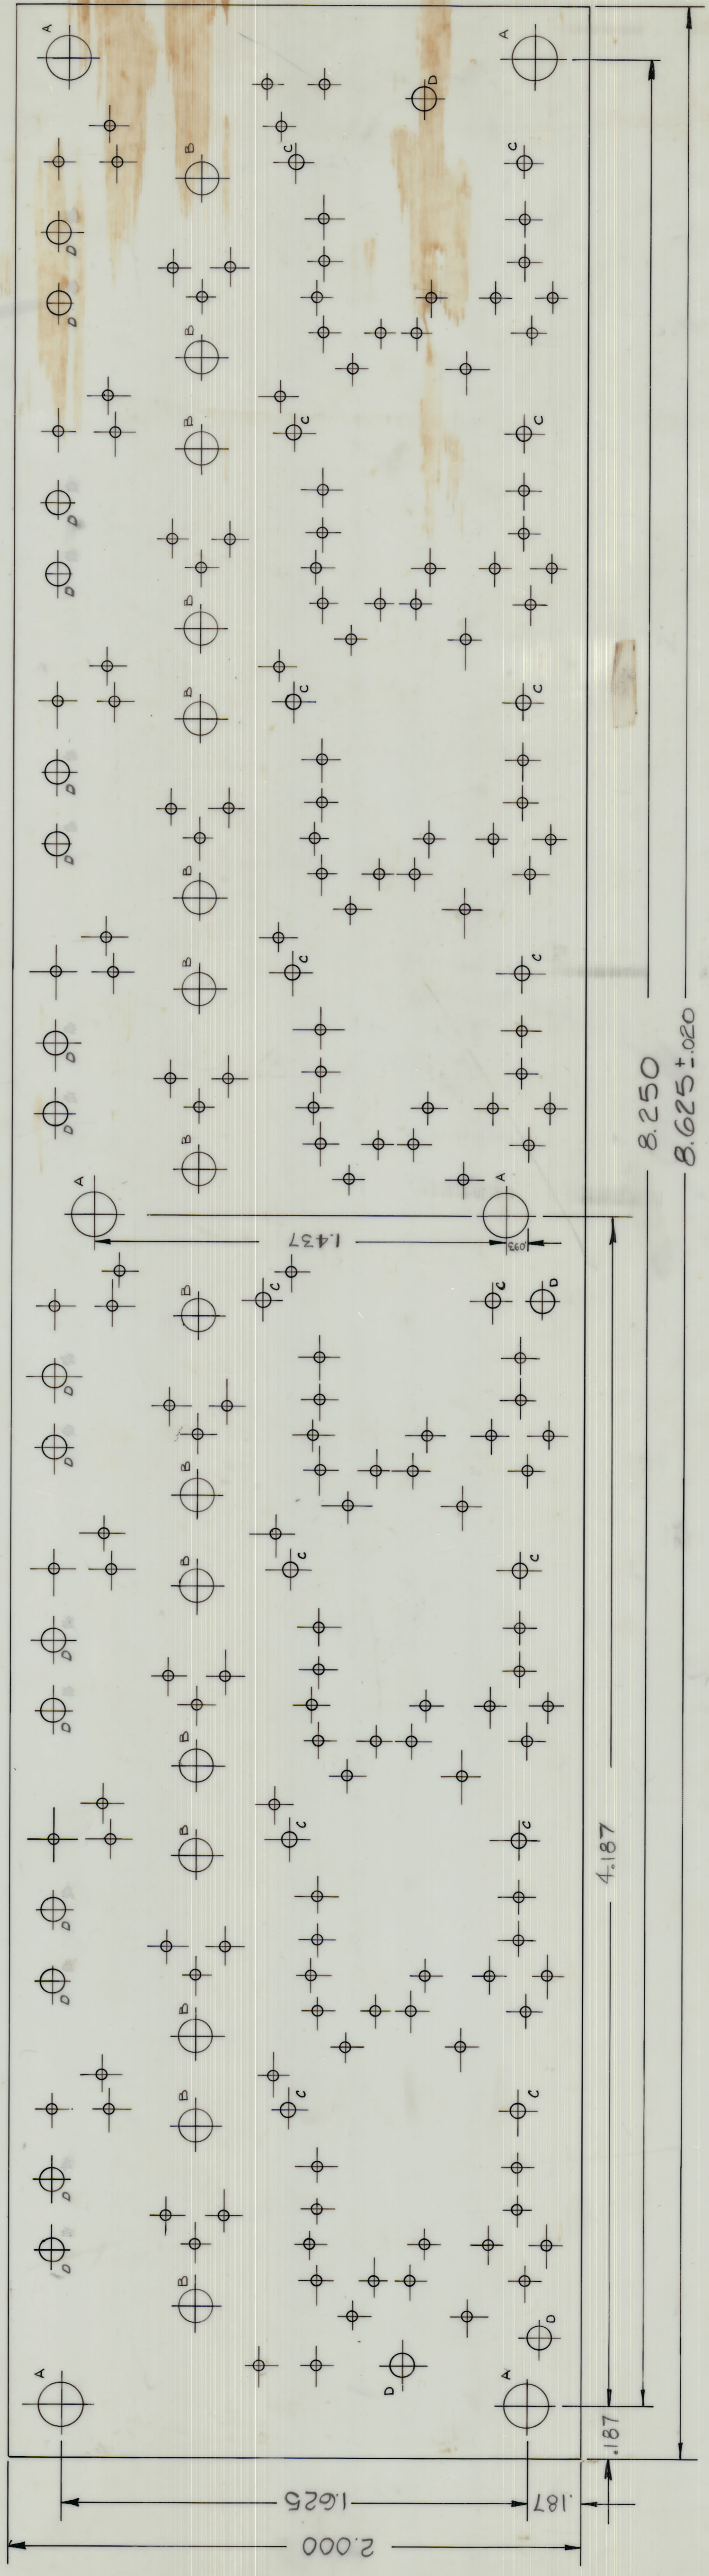

HOLE	DESCRIPTION	REQ'D
A	.140 DIA	6
B	.109 DIA	16
C	.053 DIA	16
D	.078 ±.003 DIA	20
UNMARKED	.035	N/A

- NOTES:
- (1) MATERIAL: PLASTIC SHEET, LAMINATED COPPER CLAD FL-GE-062-C-2/2 PER MIL-P-13949
  - (2) ALL HOLES TO BE PLATED THRU PLATED WITH A MINIMUM WALL THICKNESS OF .001 OF COPPER
  - (3) CONDUCTIVE PATTERN TO BE: PLATED WITH A MINIMUM OF .0003 INCH OF TIN LEAD
  - (4) THIS BOARD SHALL MEET THE REQUIREMENTS OF TMC'S SPEC 735

L/MC-32		098/09	DATE	09/11
TMC (Canada) LIMITED OTTAWA ONTARIO		PC-ASSY OUTPUT AMC/LMC-32		
DESIGNER	CHKD BY	DATE	APPROVED	DATE
AMC	AMC	09/11	AMC	09/11
MATERIAL		MATERIAL		
TYPE & TEMPS		TYPE & TEMPS		
PLATE FINISH		PLATE FINISH		
FINISH & SPEC. NO.		FINISH & SPEC. NO.		
SHT 30FG		A10791-2		