

A-1119 A


REQ. PER UNIT	MODEL	USED ON ASSY. N.	DATE
2	RTF		10-12-58
2	RTF-2	MULT.	11-20-58

WINDING  
SIX (6) CLOSELY SPACED TURNS OF  
#30DSC IN CENTER OF ITEM 1.

FABRICATION

- 1- STAKE COIL TO ITEM 1 WITH ITEM 3.
- 2- COAT WITH ITEM 4.
- 3- BAKE DRY AT 270°F FOR 1 hr.
- 4- SOLDER LEADS AS SHOWN.
- 5- TIN RESISTOR LEADS

L = .14 mhy ± 10% } FOR REF. ONLY  
R = 100Ω ± 10%

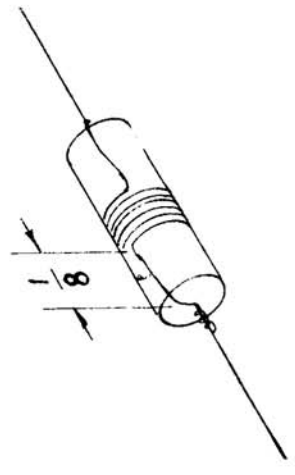

TEST DATA -  
ONLY VISUAL INSPECTION REQUIRED

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 5	BS-100	SOLDER, SOFT	
X 4	GL-10A-2	INSULEX U-85	
X 3	GL-103	CEMENT	
X 2	WI-10T-11	WIRE #30DSC	
1	RC20GF 101J	RESISTOR, FIXED	

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
SUPPRESSOR, PARASITIC	
PS-201 & PS-202	RTF
DATE: 10-12-58	CHECKED: [Signature]
DRAWN: [Signature]	FINAL APPROVAL: A.J.J.
ELEC. DES. APP. MECH. DES. APP.	
FINISH & SPEC. NO. A-1119 A	

CHG'D "K" TO "J" (11/1) ADD 11/17/66 RME [Signature]  
REF. ONLY NOTE.

DATE: 11/17/66 CH. NO. 17264 DRAFTS: RME [Signature]  
CHECKER: [Signature] ENG. APP.

SCALE:

TOLERANCES  
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.  
REMOVE ALL BURRS AND SHARP EDGES

DEC. DIM. ±  
FRAC. DIM. ±  
ANGULAR DIM. ±