


| | | | | | | | |
|---|------|---|----------|---------|--------|---------|-----------|
| IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY | | DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED | | | | | |
| MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION REMOVE ALL BURRS AND SHARP EDGES | | | | | | | |
| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. |
| A | | COMPLETELY REDRAWN | 7 Mar 73 | 1210 | MMX | YFL | SPW |

| | | | | |
|------|------|----------|-------------|--------|
| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|------|------|----------|-------------|--------|

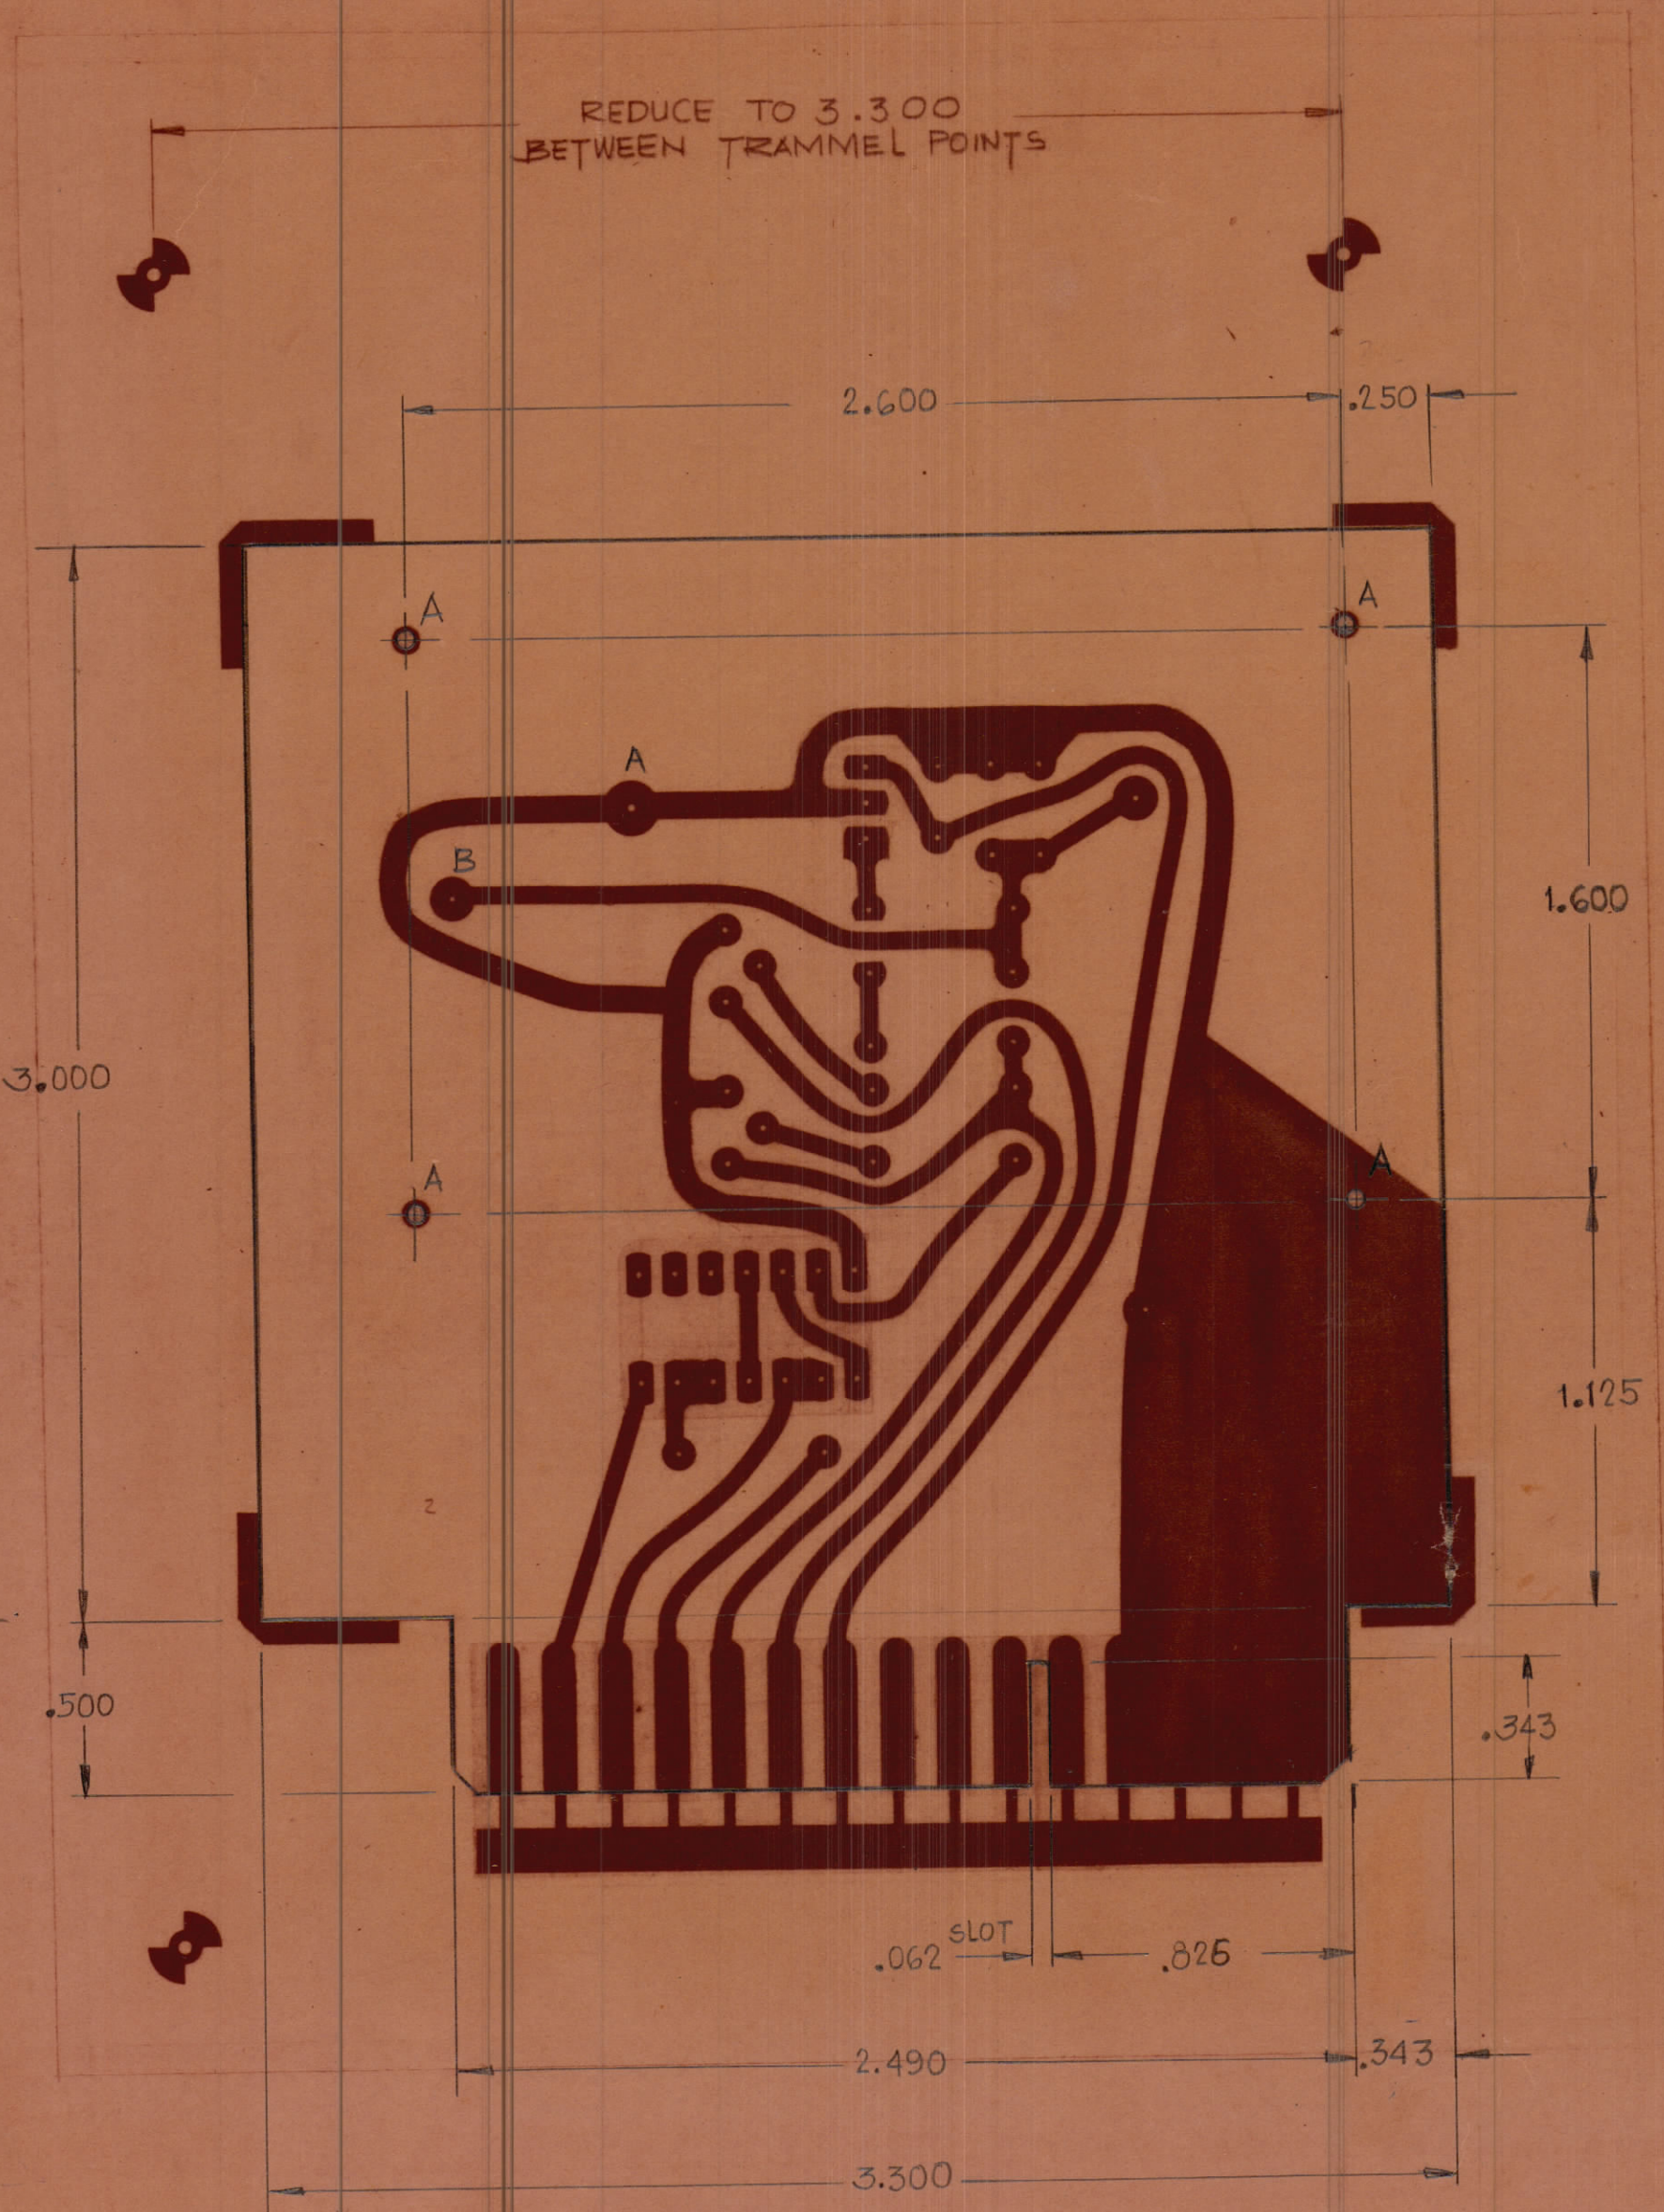


| HOLE | DESCRIPTION | QTY |
|----------|-------------|-----|
| A | .140 DIA | 5 |
| B | .081 DIA | 1 |
| UNMARKED | .042 DIA | ~ |

NOTES: ~

1. MATERIAL - PLASTIC SHEET LAMINATE COPPER CLAD FL-GE-062-C-2/0.
2. FINISH: CONDUCTIVE PATTERN TO BE PLATED WITH .0003 THICK MIN. TIN/LEAD & EDGE CONNECTOR TO BE PLATED WITH .0001 THICK MIN. GOLD OVER .0003 THICK MIN. LOW STRESS NICKEL.
3. THIS BOARD MUST MEET THE REQUIREMENTS OF TMC SPEC 5-735.

A11076-2 A

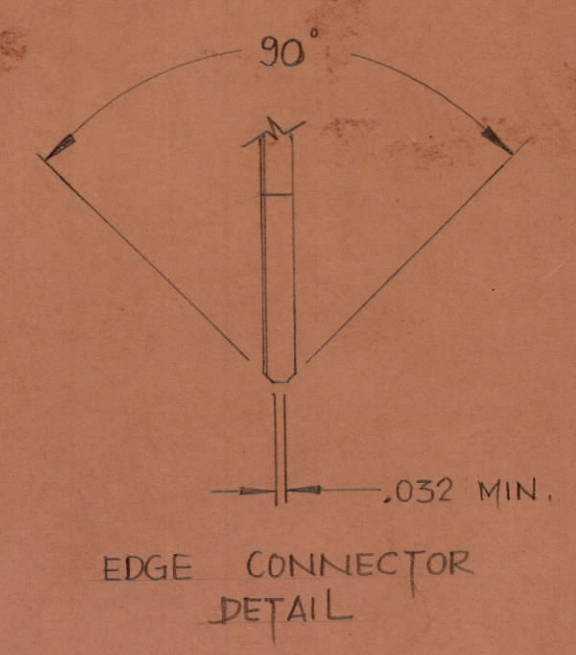

| | | | |
|------------|---------|--------------------------------|-----|
| TOLERANCES | | SCALE | 2:1 |
| ALL DIMS | XX+.05 | DRILL, PUNCH, COMMERCIAL STOCK | |
| FRAC DIMS | XX+.01 | SIZES AND MANUFACTURERS | |
| ANGULAR | XX+.005 | TOLERANCES ARE NOT INCLUDED | |

| | | | |
|-----------|-------------|-----------|----------|
| MMX () 3 | 110/71 | A11076-5 | 7 Mar 73 |
| MODEL | PROJECT NO. | ASSY. NO. | DATE |

| | | | |
|-------------------|--|--|----------------|
| STOCK SIZE | | TMC (Canada) LIMITED OTTAWA ONTARIO | |
| MATERIAL | | P.C. BOARD ETCHING OUT OF LOCK | |
| WEIGHT PER PC | | MMX | SPW |
| TYPE & TEMPER | | YFLEE | S.WITTEN |
| HEAT TREAT SPEC | | CHECKED | FINAL APPROVAL |
| FINISH & SPEC NO. | | SHEET 2 OF 5 A11076-2 A | |