REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE		
1	459 GSB-1		5-17-56	A-1316	C

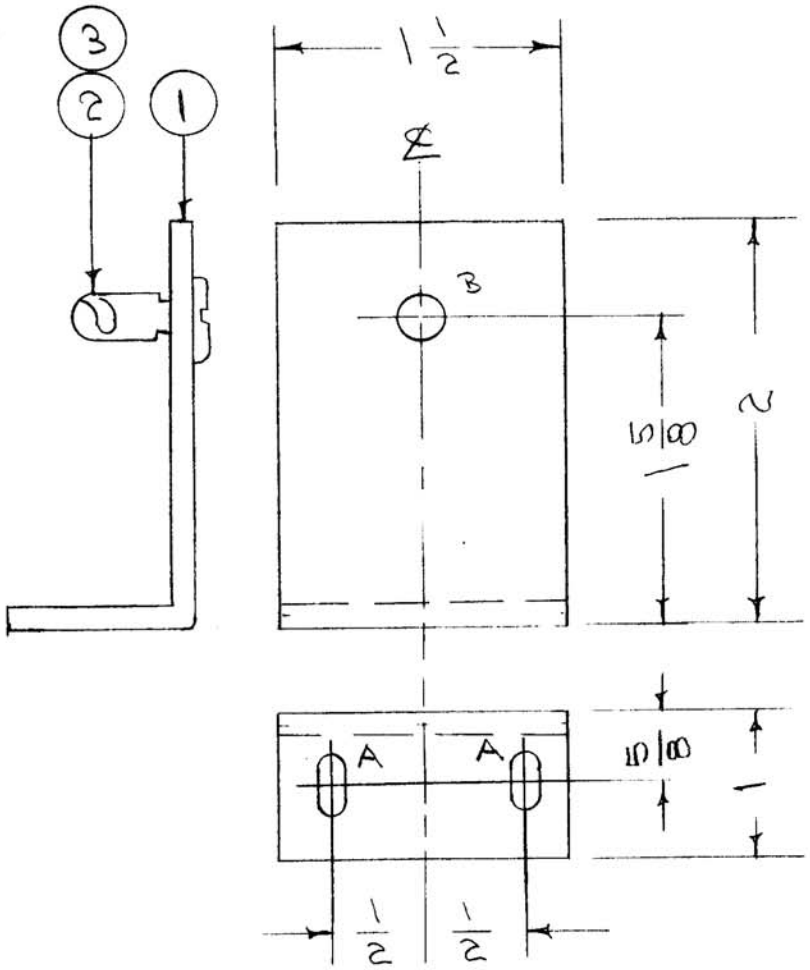

A - 5/32 x 5/16 SLOT 2 SLOTS REQ
B - 1/4 (.250) D. 1 HOLE "

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	3	FS-110-4	STUD, SLOTTED HEAD	
1	2	FS-109	RING, RETAINING	
1	1	MS-943	REAR SUPPORT (NO DWG.)	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	1	S-404 IRIDITE WAS S-101 CAUSTIC DIP	12-7 59	1001			EMN
B	1	5/8 WAS 3/8; 1 WAS 3/4	4/14/58	2			
A	2	Item 3 Was FS-110-1	7 26 57	1			
	1	2" Was 2 1/8					

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±1/64
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE: 2 x 1 x 1/8

MATERIAL: ALUMINUM

TYPE & TEMPER: 5052 H32

HEAT TREAT. SPEC.:

FINISH & SPEC. NO.: S404-IRIDITE

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

REAR SUPPORT ASSY., CHASSIS GSB-1

DRAWN	CHECKED	FINAL APPROVAL	
CDD 5/11/56			
ELEC. DES. APP.	MECH. DES. APP.	A-1316	C
	2B		

FORM - 108 - A