REQ. PER UNIT	529 MODEL	USED ON ASS'Y. NO.	DATE	A-1337
1	TER-500		8-22-56	

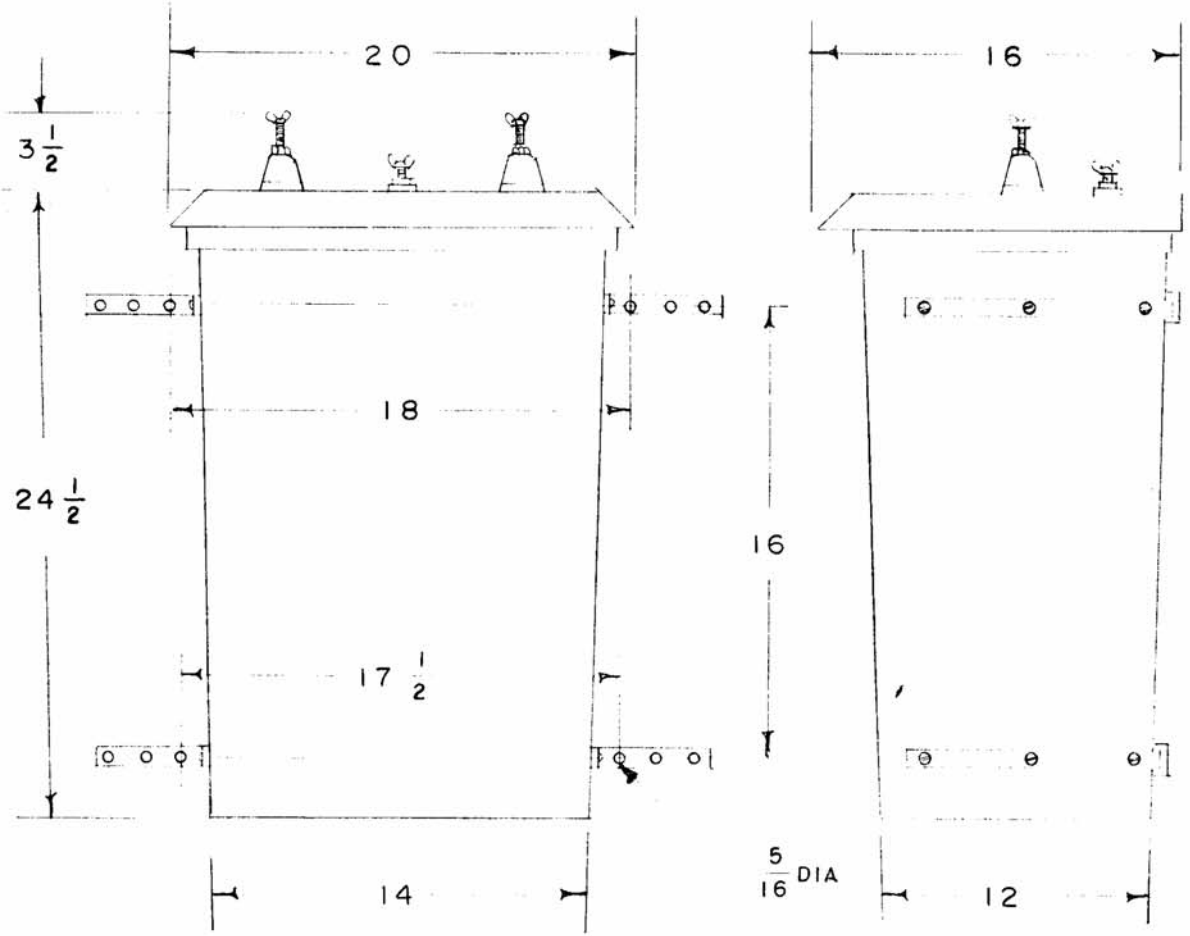

ELECTRICAL SPECIFICATIONS

RESISTANCES - TER-500
NOMINALLY 600 OHMS

DISSIPATION RATING - UP TO
500 WATTS AT 30 MCS

MECHANICAL SPECIFICATIONS

CASE - FIBREGLASS REINFORCED PLASTIC

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE T LERANCES HAVE BEEN DETERMINED AND ANY DEVIATI NS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

MODEL TER-500

CDD 8-22-56		
DRAWN	CHECKED	FINAL APPROVAL
ELEC. DES. APP.	MECH. DES. APP.	A-1337

FORM - 108 - A