Stamping to be 1/8" high black Gothic.-
Stamp before ass'y. of components.

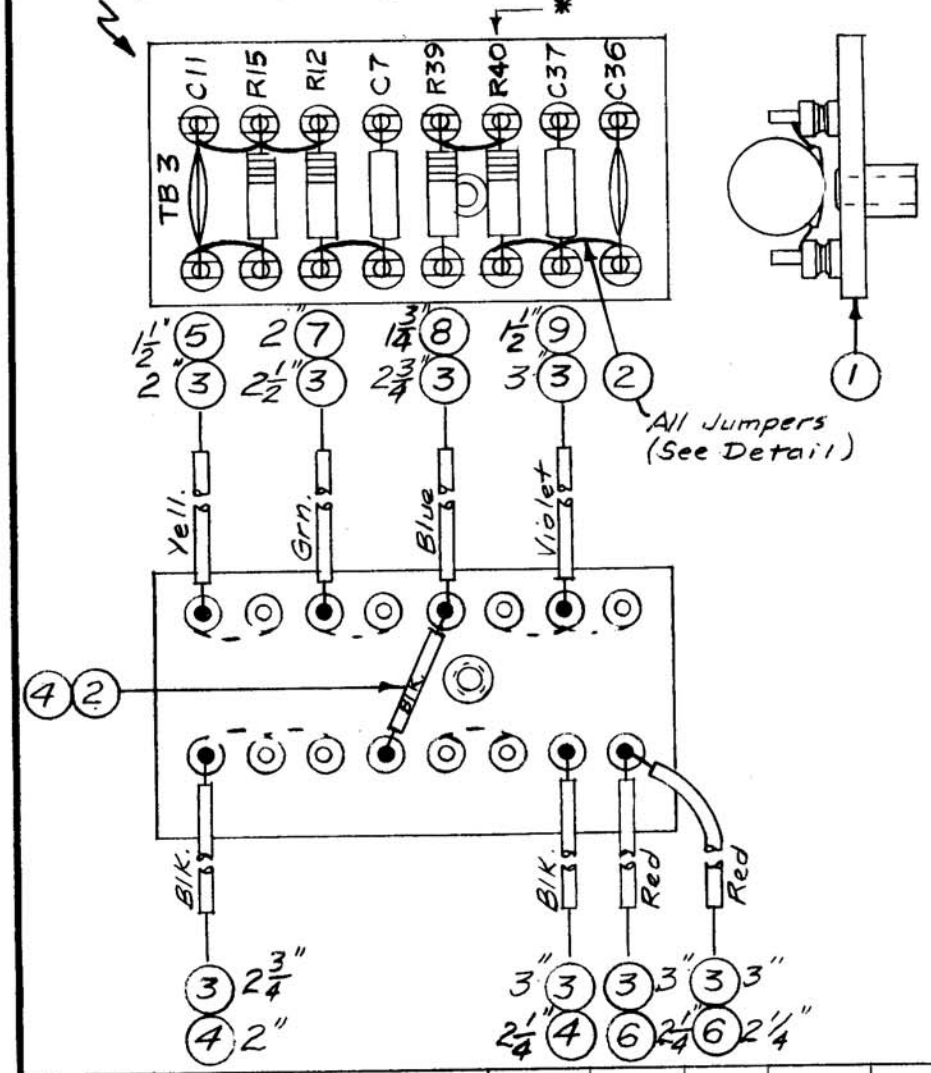

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	A-1391	A
1	MSR-1		3-6-57		

* Do Not Solder This End of R40 on This Ass'y.

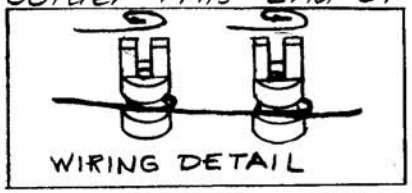

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	16	BS-100	Solder, Soft	
2	15	RC20GF393K	Resistor, Fixed, Comp.	R40, R39
1	14	RC20GF221K	" , " , "	R15
1	13	RC20GF223K	" , " , "	R12
1	12	CC-101-2	Capacitor, Fixed, Ceramic	C37
2	11	CC-100-16	" , " , "	C36, C11
1	10	CC21SL470K	" , " , "	C7
1½"	9	PX-104-9-.034	Insulation, Sleeving (Size 20)	Violet
1¾"	8	PX-104-6-.034		Blue
2"	7	PX-104-4-.034		Green
4½"	6	PX-104-3-.034		Red
1½"	5	PX-104-2-.034		Yellow
5"	4	PX-104-1-.034		Black
22"	3	WL-100-7	Wire, Buss (Size 22)	
X	2	WL-100-8	Wire, Buss (Size 24)	
1	1	A-1367	Term. Bd. No. 3 Sub-Ass'y.	

ISSUE	ITEM	CHAN ED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	3	ASTERIK NOTE ADDED	4/15/57	1	16	P.L.K	A.J.J
	2	LEAD LENGTHS CHG'D.					
	1	JUMPER DETAIL ADDED					

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE T LERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

TERMINAL BOARD NO. 3
FINAL ASS'Y. & STAMPING

DRAWN	CHECKED	FINAL APPROVAL
16 3-6-57		A.J.J
P.L.K		A-1391 A

ELEC. DES. APP. | MECH. DES. APP.

FORM - 108 - A