REQ. PER UNIT	USED ON			A-1542
	MODEL	ASS'Y. NO.	DATE	

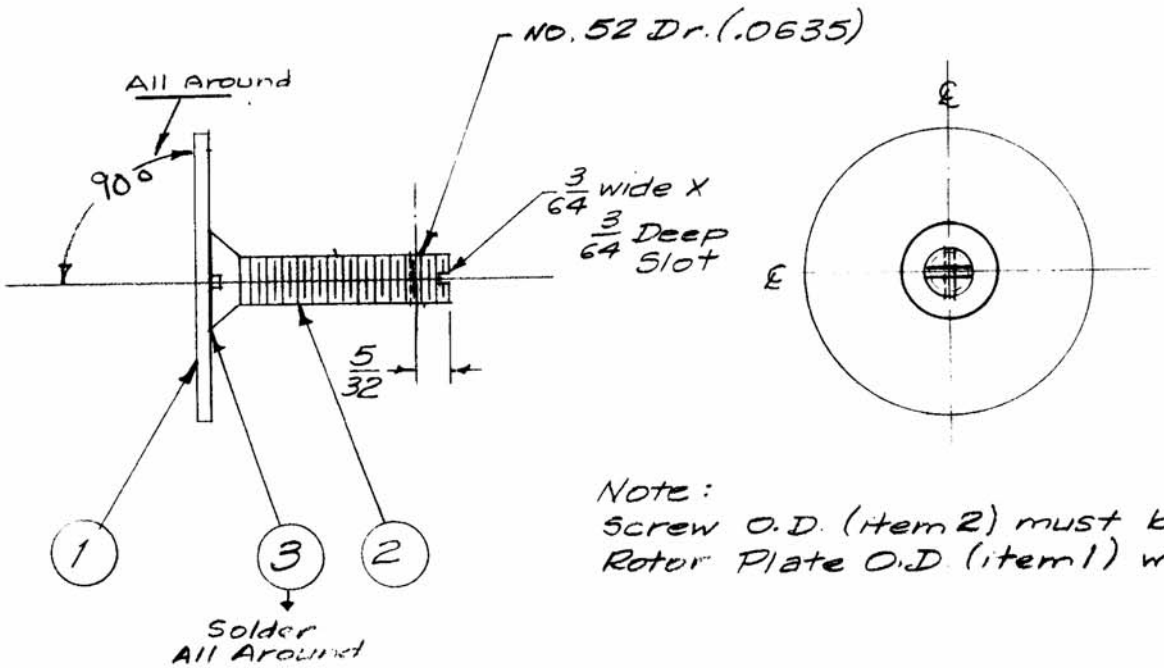

Note:
Screw O.D. (Item 2) must be concentric with Rotor Plate O.D (item 1) within ±.005

Dele. from EFA-1 6-2-58 LG (use PM-492)

X	3	BS-101-1	Solder, Silver
1	2	SCFS2520BR20	Screw, Machine (modify as shown)
1	1	MS-779	Plate, Rotor, Neutral. Cap.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±1/64
ANGULAR DIM. ± .5°

SCALE: FULL

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER: 5245 Silver Plate .0002
HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

ROTOR ASS'Y., NEUTRALIZING CAPACITOR

DRAWN	CHECKED	FINAL APPROVAL
5/20/58		

ELEC. DES. APP.	MECH. DES. APP.	A-1542

FORM 108-A