


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.  
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

**NOTICE TO PERSONS RECEIVING THIS DRAWING**

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be re-produced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
 THE TECHNICAL MATERIEL CORPORATION  
 MAMARONECK, NEW YORK

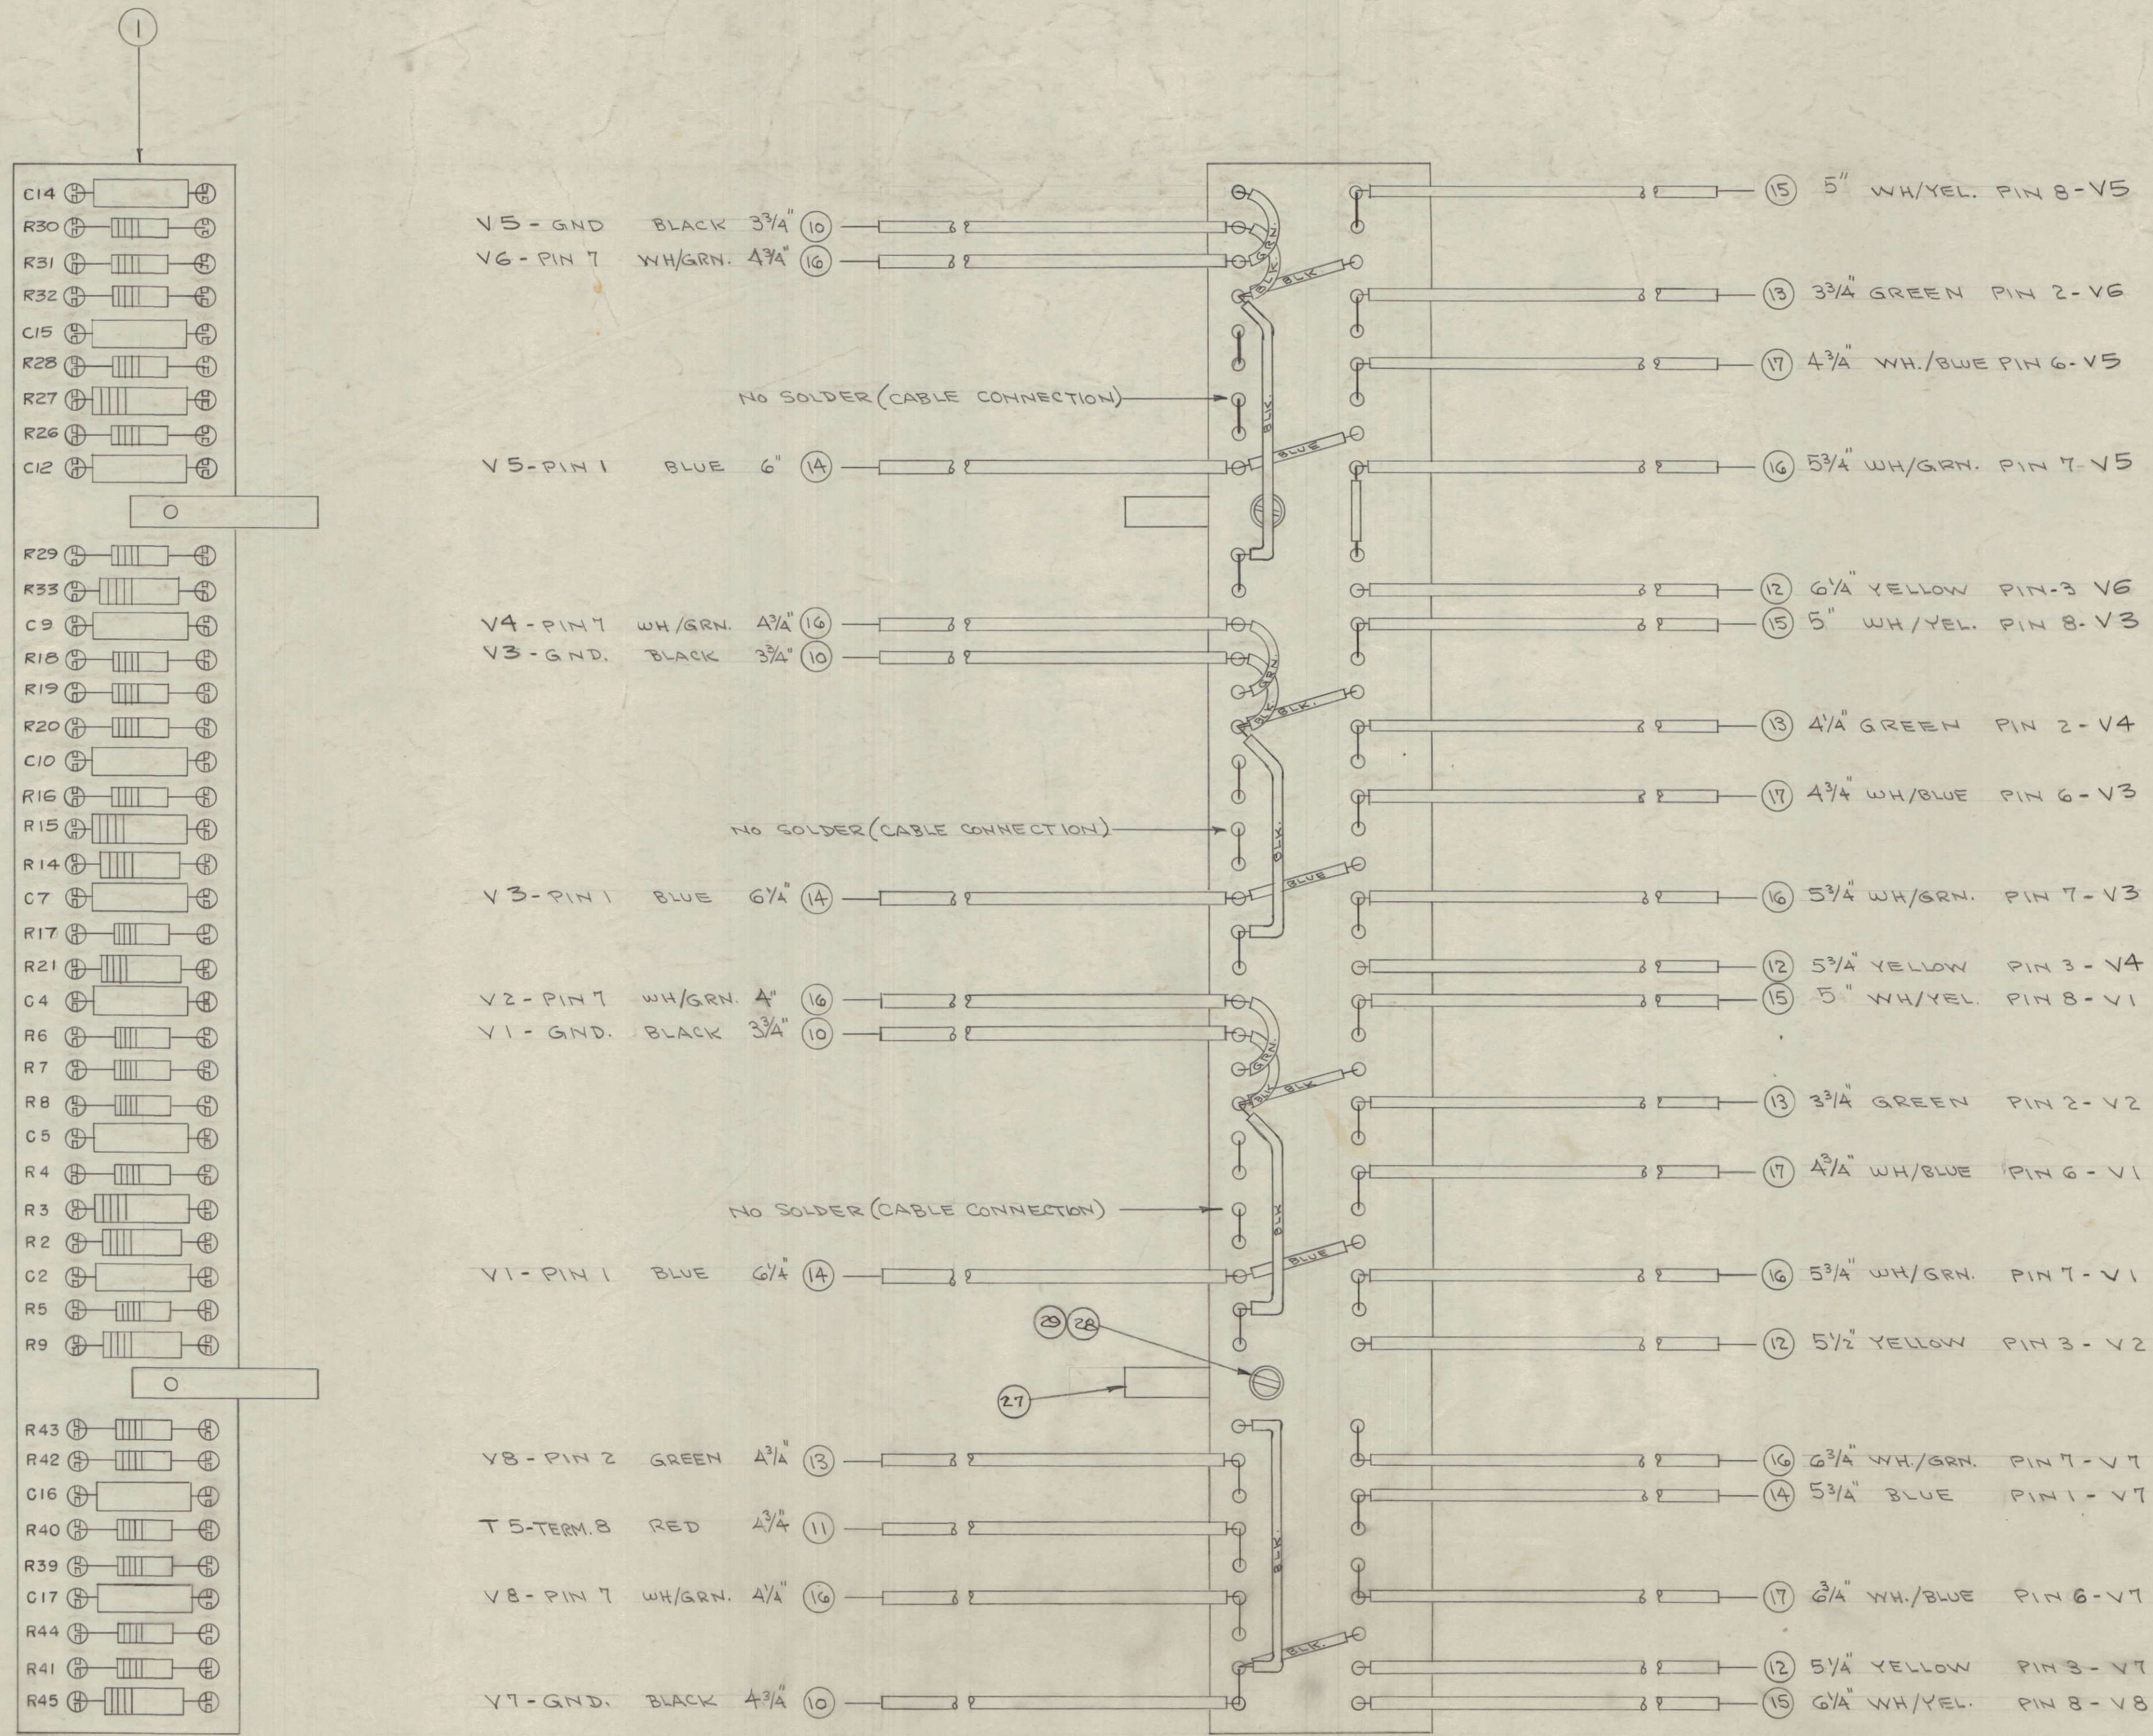

WIRE LENGTHS OF SRIR ARE TOTAL LENGTHS AND ALLOW 3/4" EACH END FOR STRIPPING.  
 BARE JUMPERS ARE ITEM 18  
 OTHER JUMPERS ARE ITEMS 18 & SLEEVING (ITEMS 19, 20, 21) COLORS AS ABOVE

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
2	29	SCBS0632BC6	SCREW, MACHINE
2	28	LWE06MRC	LOCKWASHER, EXT.
2	27	MS-398	TERMINAL BD. MOUNTING
1	26	RC30GF681K	RESISTOR, FIXED
1	25	RC20GF15K	
2	24	RC20GF105K	
1	23	RC20GF152K	
X	22	BS-100	SOLDER, SOFT
X	21	PX-104-G-034	INSULATION, SLEEVING (BLU)
X	20	PX-104-A-034	" " (GRN.)
X	19	PX-104-1-034	" " (BLK.)
X	18	WL-100-T	WIRE, BUSS BAR 22 GA
21	17	MWC22(7)096	CABLE, INSULATED (WH/BLU)
16	16	95	(WH/GRN.)
21 1/2	15	94	(WH/YEL)
2 1/4	14	6	(BLU)
1 1/2	13	5	(GRN.)
2 2/4	12	4	(YEL.)
1 1/2	11	2	(RED)
1 1/2	10	0	(BLK.)
3	9	RC30GF392K	RESISTOR, FIXED
6	8	RC20GF104J	
3	7	RC20GF411J	
5	6	RC20GF474K	
3	5	RC20GF214J	
3	4	RC42GF103J	
3	3	RC30GF683J	
11	2	CM35B103K	CAPACITOR, FIXED
1	1	A-1588	TERM. BD. SUB ASSY.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
ALL	OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±					

MODEL	PROJECT NO.	ASSY. NO.	DATE
R3C-3			10/11/58

A-1589