


X = DO NOT MAKE SOLDER CONNECTION
AT THIS TIME

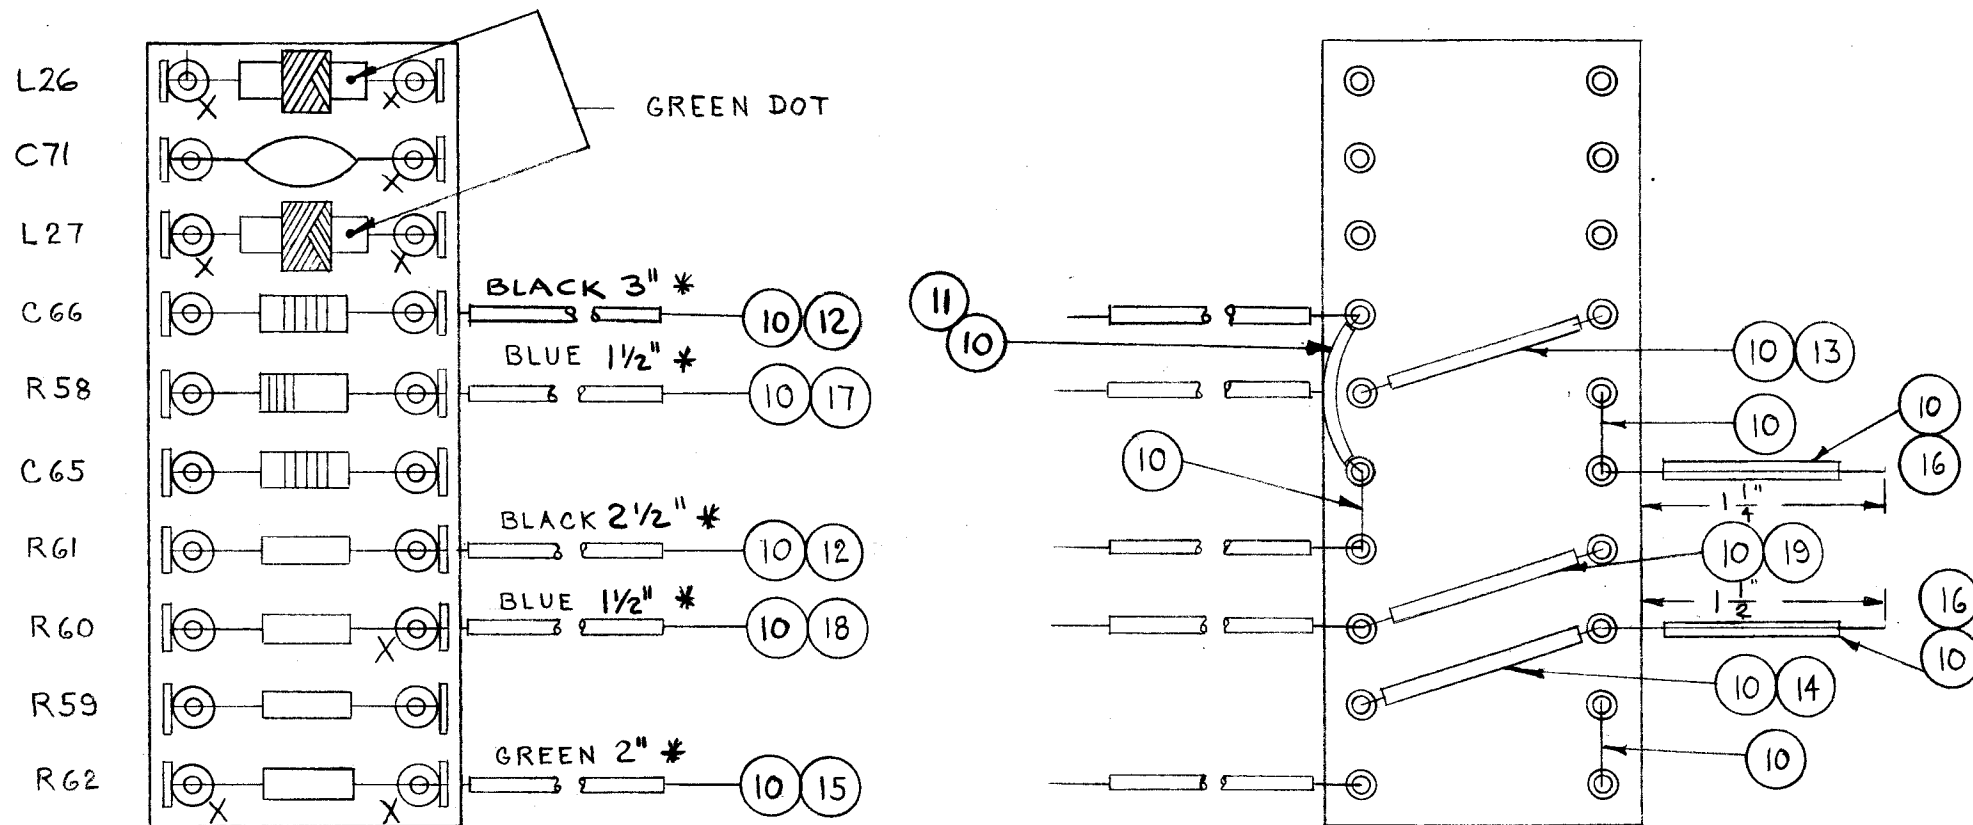

* LENGTHS INCLUDE STRIPPING
AND TINNING.

X	20	BS-100	SOLDER, SOFT	
2	19	PX-104-6-022	INSULATION, SLEEVING	BLUE
X	18	PX-104-6-022		BLUE
X	17	PX-104-6-022		BLUE
X	16	PX-104-6-022		BLUE
X	15	PX-104-4-022		GRN.
2	14	PX-104-2-022		YELL.
2	13	PX-104-2-022		YELL.
X	12	PX-104-1-022		BLACK
3/4	11	PX-104-1-022	INSULATION, SLEEVING	BLACK
X	10	WL-100-7	WIRE, BUSS BAR	
2	9	CL-177	CHOKE, R.F.	L27 L26
1	8	RC20GF824J	RESISTOR, FIXED	R62
1	7	RC20GF474J		R61
1	6	RC20GF224J		R60
1	5	RC20GF105J		R59
1	4	RC20GF473J	RESISTOR, FIXED	R58
1	3	CC-100-16	CAPACITOR, FIXED	C71
2	2	CC-101-3	CAPACITOR, FIXED	C66 C65
1	1	A-980	TERM. BD. SUB ASS'Y	

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
TERM. BD. ASS'Y, REAR OF CHASSIS GPR-90RXD			
MATERIAL		DRAWN	CHECKED
TYPE & TEMPER		FINAL APPROVAL	
HEAT TREAT. SPEC.		A-1892	
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.

C	L26 & C71 REVERSED	11-16-67	17675	W40	JCP	MA
B	CHGD REQ IT 16 TO X DELE DECIMALS IT 11 TO 19	10-	17040	R	JCP	MA
A	CHGD RES. TOL FR "K" TO J CHGD REQ. IT 13, 14, 19 TO 2 LENGTHS ADDED TO LEADS	19- 66		M E	JCP	
ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE:				
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC. DIM. ±		REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. ±						
1	GPR-90RXD	PROJECT NO.		ASS'Y. NO.		DATE
REQ. PER UNIT	MODEL	PROJECT NO.		ASS'Y. NO.		DATE
USED ON						