REQ. PER UNIT	USED ON			A-2016
	MODEL	ASS'Y. NO.	DATE	
2	CHG-1	R.F. SECT	11-4-60	

L = 2 uhy (±5%)
Q = 100 or Greater
FREQ. = 7.9 mcs

WIND 13 TURNS OF ITEM 2 ON ITEM 1.
CLOSE WOUND

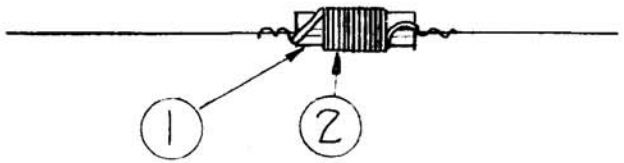

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	3	BS-100	Solder, Soft	
X	2	WI-122-24	Wire, Formvar #24	
1	1	CI-114	Core	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CL-262 COIL ASSEMBLY

DRAWN	CHECKED	FINAL APPROVAL
D.D.	A.	
ELEC. DES. APP	MECH. DES. APP	A-2016
G.A.		

FORM 108-A