
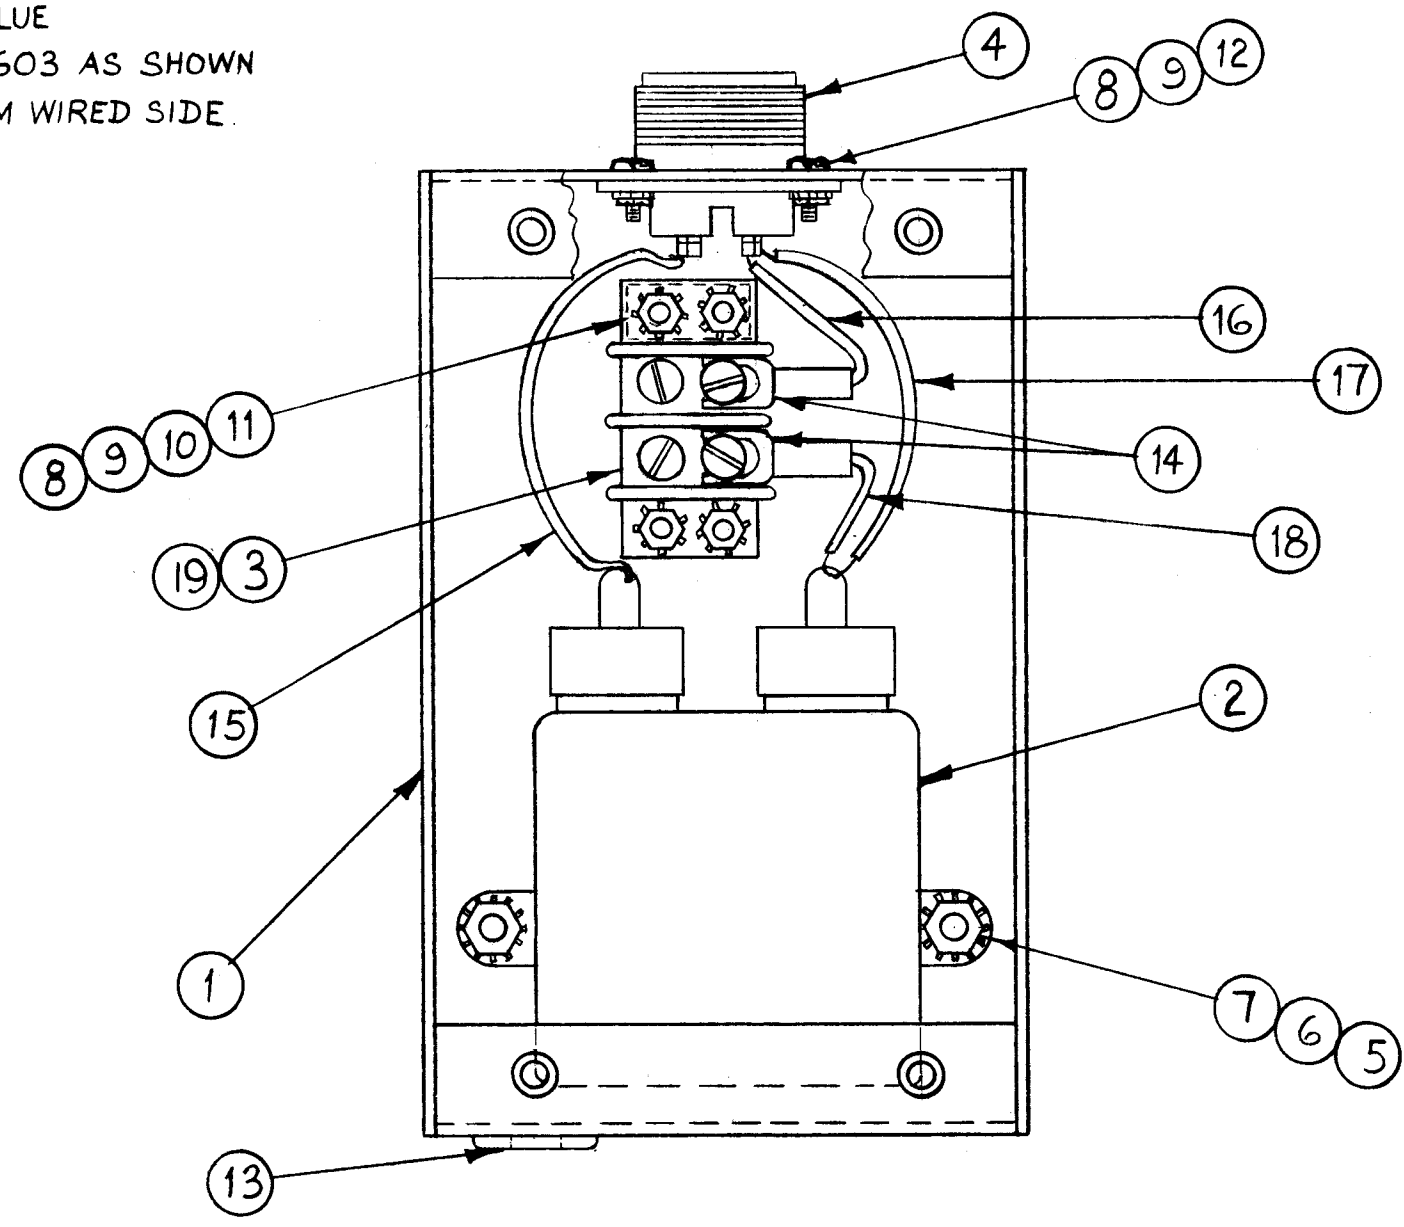


A-2036

D

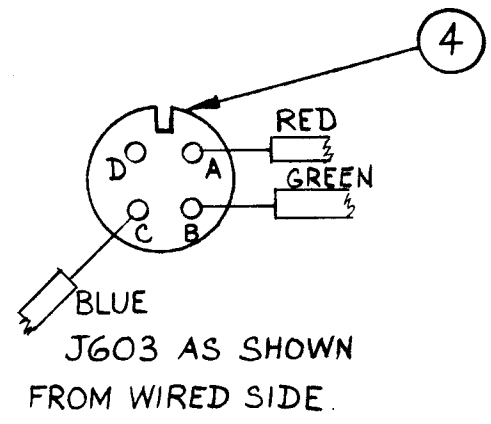

X	20	BS100	SOLDER, TIN ALLOY	
1	19	PX336-2	INSULATOR, TERM., STRIP	
2"	18	MWC22(7)U5	CABLE INSULATED	GREEN
4"	17	MWC22(7)U5		GREEN
2"	16	MWC22(7)U2		RED
3"	15	MWC22(7)U6	CABLE, INSULATED	BLUE
2	14	TE-120-2	SPADE, LUG	
1	13	EY-102-13	GROMMET, RUBBER	
4	12	SCBP0440BN5	SCREW, MACHINE	
2	11	MS-154-1	PLATE, STRADDLE	
4	10	SCBP0440BN8	SCREW, MACHINE	
8	9	LWE04MRN	LOCKWASHER, EXT. TOOTH	
8	8	NTH0440BN8	NUT, HEX.	
2	7	SCBP0632BNG	SCREW, MACHINE	
2	6	LWE06MRN	LOCKWASHER, EXT. TOOTH	
2	5	NTH0632BN8	NUT, HEX.	
1	4	MS3102A-14S-2S	CONNECTOR RECEPTACLE, FEMALE	J603
1	3	TM-102-2	TERMINAL, STRIP	E601
1	2	CP53B1EF205K1	CAPACITOR, OIL FILLED; 2UF 600VDC	C613
1	1	LD878/MS2492	CHASSIS, BLOWER CONN.	

D	ITEM 13 WAS EY-102-3	3-22-67	18025	L.A.A.	W	NA
C	DRAWING UPDATED	1-9-67	17643	RME	W	W
B	DELETED SYM C613 FR. IT. 1, E601 FR. IT. 2, J603 FR. 3 COLORS ADDED TO WIRES, IT. 20 WAS PX100-1-29A ITEM 19 WAS MS3102A-14S-2P, P603 WIRING DELE.	7-30-64	11979	SRG	W	W
A	Item 9 was LWE04MRC Item 20 was PX-100-1-300	1-24-61	3967	P	W	PK
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE:
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

1	RAK-9			12-19-60
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
	USED ON			

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
FAN CAPACITOR ASS'Y				
MATERIAL				
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKER
			W.F.	W.D.
			PK	9m
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	FINAL APPROVAL
				A-2036
				D