


A-2119 B

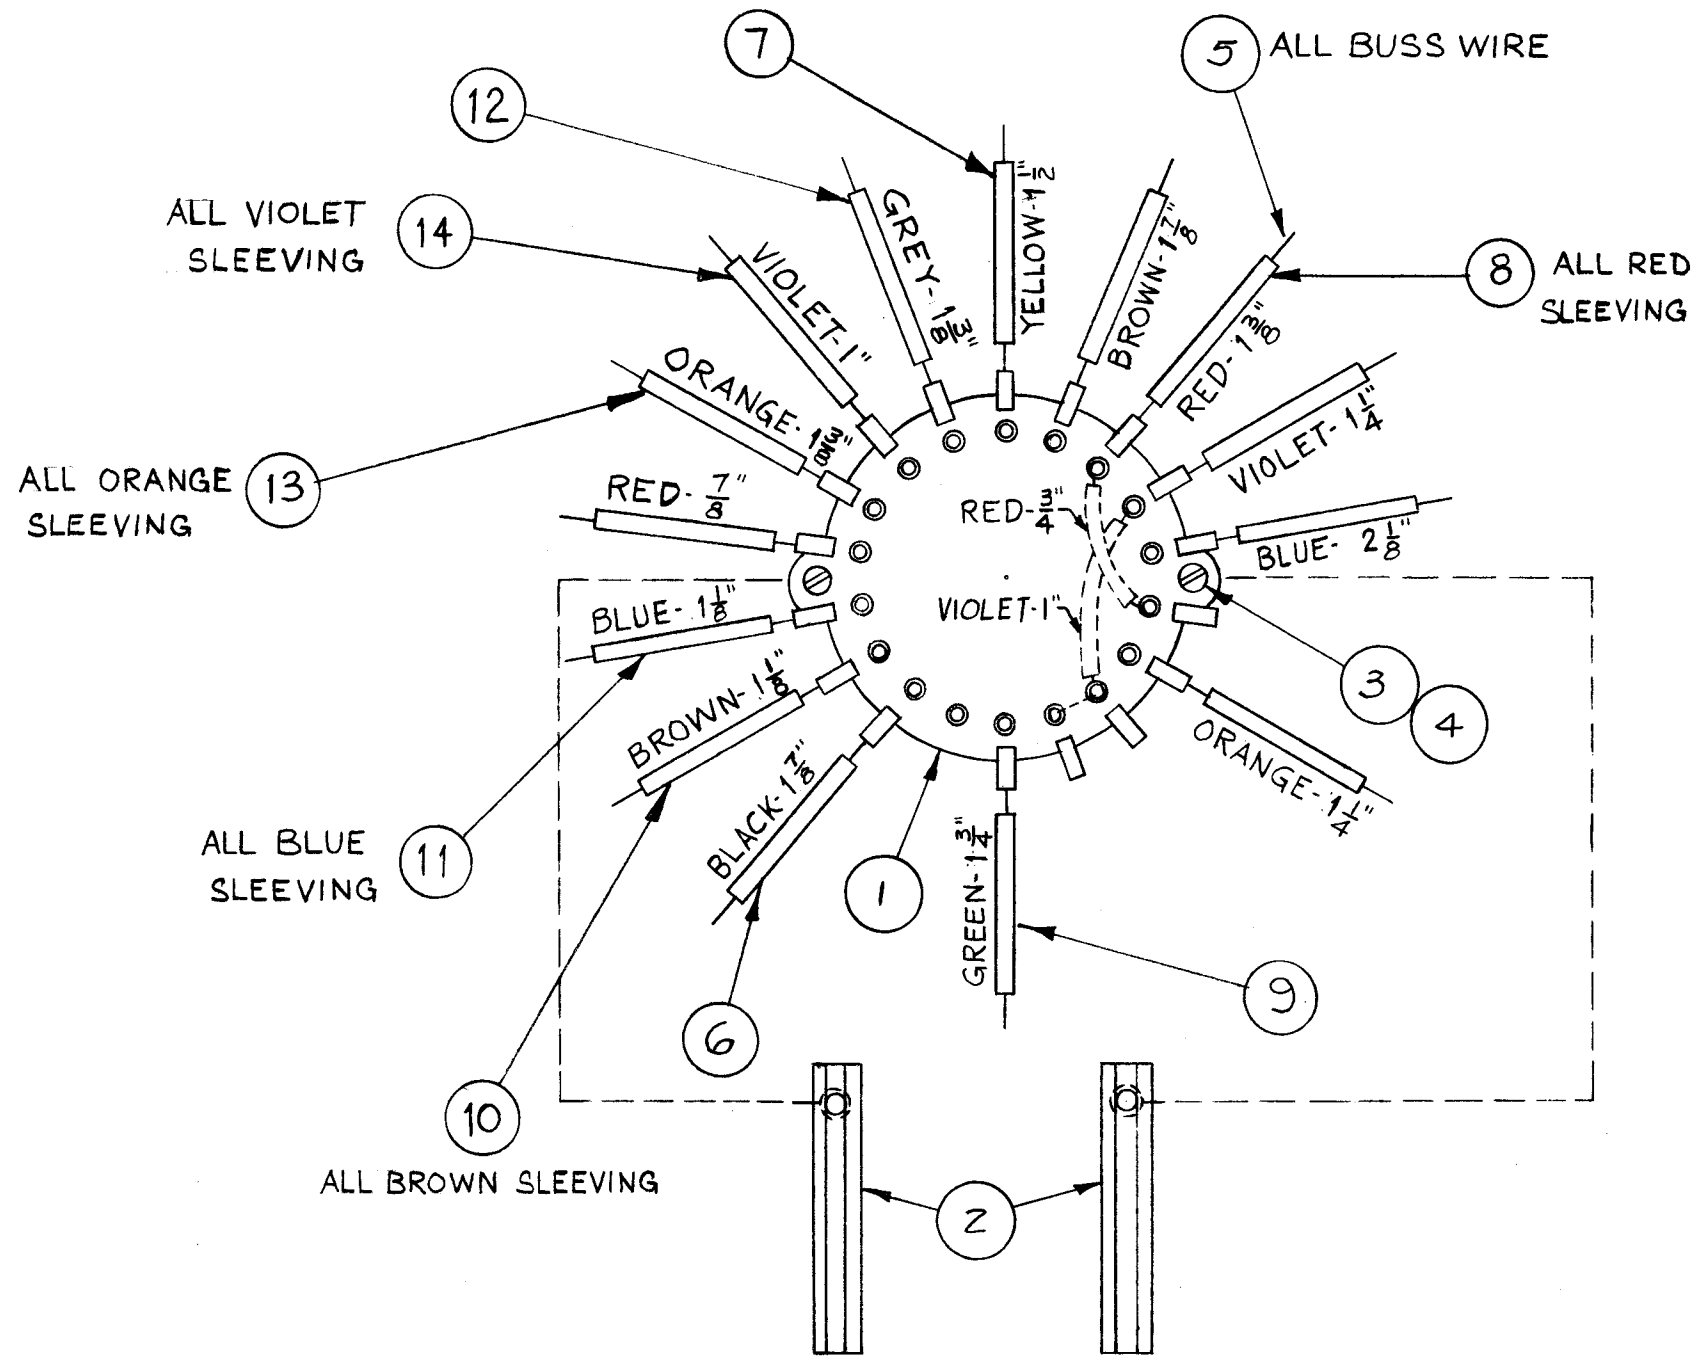

FRONT FACE OF SWITCH SHOWN

NOTE:
ALL SLEEVING TO BE 1/4" SHORTER THAN BUSS WIRE.
CLIPS ARE MOUNTED ON FRONT FACE OF SWITCH AS SHOWN.

| | | | | |
|---|----|---------------|----------------------|----------------------------|
| | 14 | PX-104-9-.034 | INSULATION SLEEVING | VIOLET |
| | 13 | -8- | | ORANGE |
| | 12 | -7- | | GREY |
| | 11 | -6- | | BLUE |
| | 10 | -5- | | BROWN |
| | 9 | -4- | | GREEN |
| | 8 | -3- | | RED |
| | 7 | -2- | | YELLOW |
| | 6 | PX-104-1-.034 | INSULATION, SLEEVING | BLACK |
| X | 5 | WL-100-7 | WIRE, BUSS-BAR | |
| | 2 | 4 | LWE04MRN | LOCK WASHER, EXTERNAL |
| | 2 | 3 | SCBP0440BN4 | SCREW, MACHINE, BINDER HD. |
| | 2 | 2 | PM-693 | SWITCH MOUNTING, STANDOFF |
| | 1 | 1 | WS-121 | WAFER ROTARY SWITCH |

| | | | | | | |
|-----|----------------------|---------|---------|--------|---------|-----------|
| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
| B | 17.3 WAS SCBS0440BN3 | 2-28-67 | 17867 | | | |
| A | WS-121 WAS WS-123 | 9/12/61 | 5552 | | | |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°
SCALE: DO NOT SCALE
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

| | | | | |
|---------------|---------|---------|------------|---------|
| 1 | CHG-2 | OVEN | | 8-11-61 |
| REQ. PER UNIT | MODEL | SECTION | ASS'Y. NO. | DATE |
| | USED ON | | | |

| | | | | |
|--|------|-------------------|-----------------|----------------|
| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
| THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | | | |
| SWITCH ASS'Y CHG-2 | | | | |
| MATERIAL | | | | |
| TYPE & TEMPER | | HEAT TREAT. SPEC. | DRAWN | CHECKER |
| | | | J.B.G. | M.A.F. |
| FINISH & SPEC. NO. | | ELEC. DES. APP. | MECH. DES. APP. | FINAL APPROVAL |
| | | | | A-2119 B |