


A-2217 A

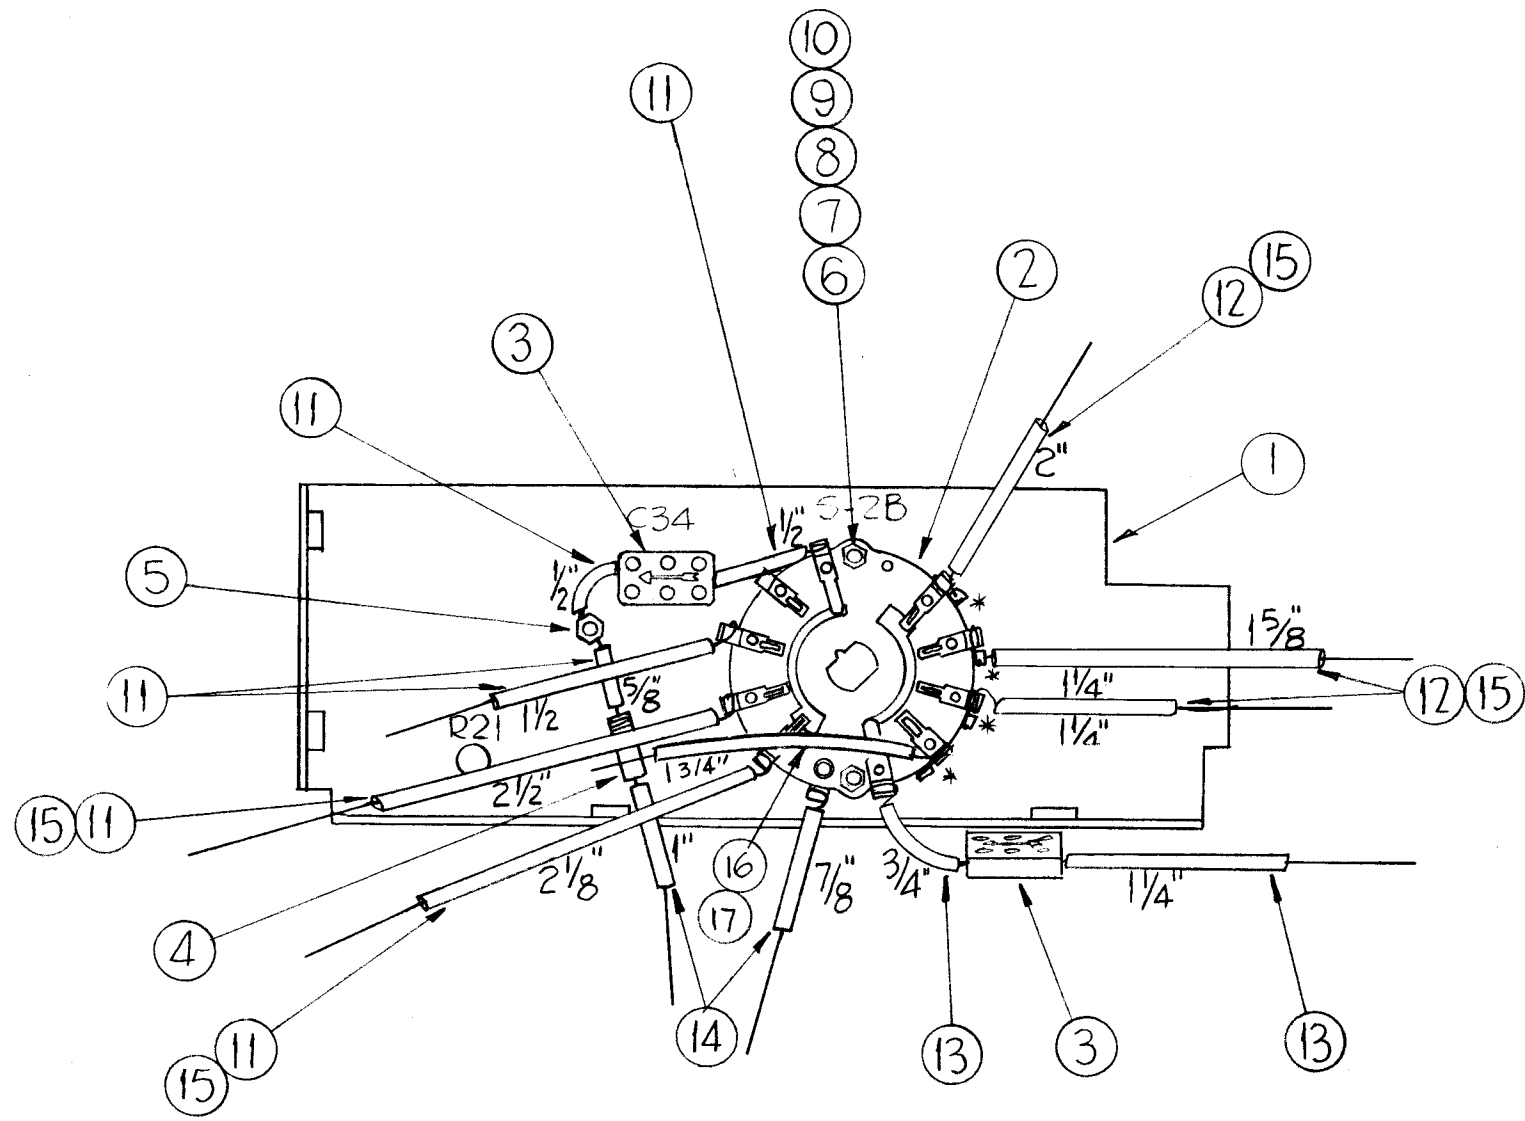

\* FRONT & REAR TERMINALS TIED TOGETHER WITH ITEM 15.

NOTE - MAKE ALL BUSS-WIRE LENGTHS 3/4" LONGER THEN SPECIFIED SLEEVING LENGTHS.

X	18	BS-100	Solders, Soft	
X	17	PX-104-4-.053	Sleeving, Insulation	Green
X	16	WL-100-4	Wire, Buss-Bar, Tinned	
X	15	WL-100-7	Wire, Buss-Bar, Tinned	
X	14	PX-104-1-.034	Sleeving, Insulation	BLACK
X	13	↑ 6 ↓	↑ ↓	BLUE
X	12	↓ 2 ↓	↑ ↓	YELLOW
X	11	PX-104-4.034	Sleeving, Insulation	GREEN
2	10	NTH0440BN6	Nut, Hex	
2	9	LWS04MRN	Lockwasher, Split	
2	8	TE-117-21	Spacer,	
8	7	WA-109-17	Washer, Fibre	
2	6	SCBP044BN10	Screw, Machine	
1	5	TE-115-1	Terminal, Turret, (Midget type)	
1	4	RC20GF103K	Resistor	
2	3	CMI5C511J	Capacitor, Fixed, Mica	
1	2	WS-101	Wafer, Switch	
1	1	MS-2621 (LD-971)	Bracket, Switch Mount	

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
RF SWITCH ASSEMBLY			
2ND STAGE			
MATERIAL		TYPE & TEMPER	HEAT TREAT. SPEC.
DRAWN		CHECKER	FINAL APPROVAL
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°		SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES	
SYM	DESCRIPTION	DATE	CH. NO.
A	ITEMS 16, 17 RELOCATED & LENGTH WAS 1 1/4"	4-26-66	16157
		DRAFTS	CHECKER
		ENG. APP.	

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
	GPE-1			10-20-61
USED ON				