IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

A-399 F

REQ. PER UNIT	USED ON MODEL	PROJECT NO.	ASS'Y. NO.	DATE
1	CFA			8-30-57

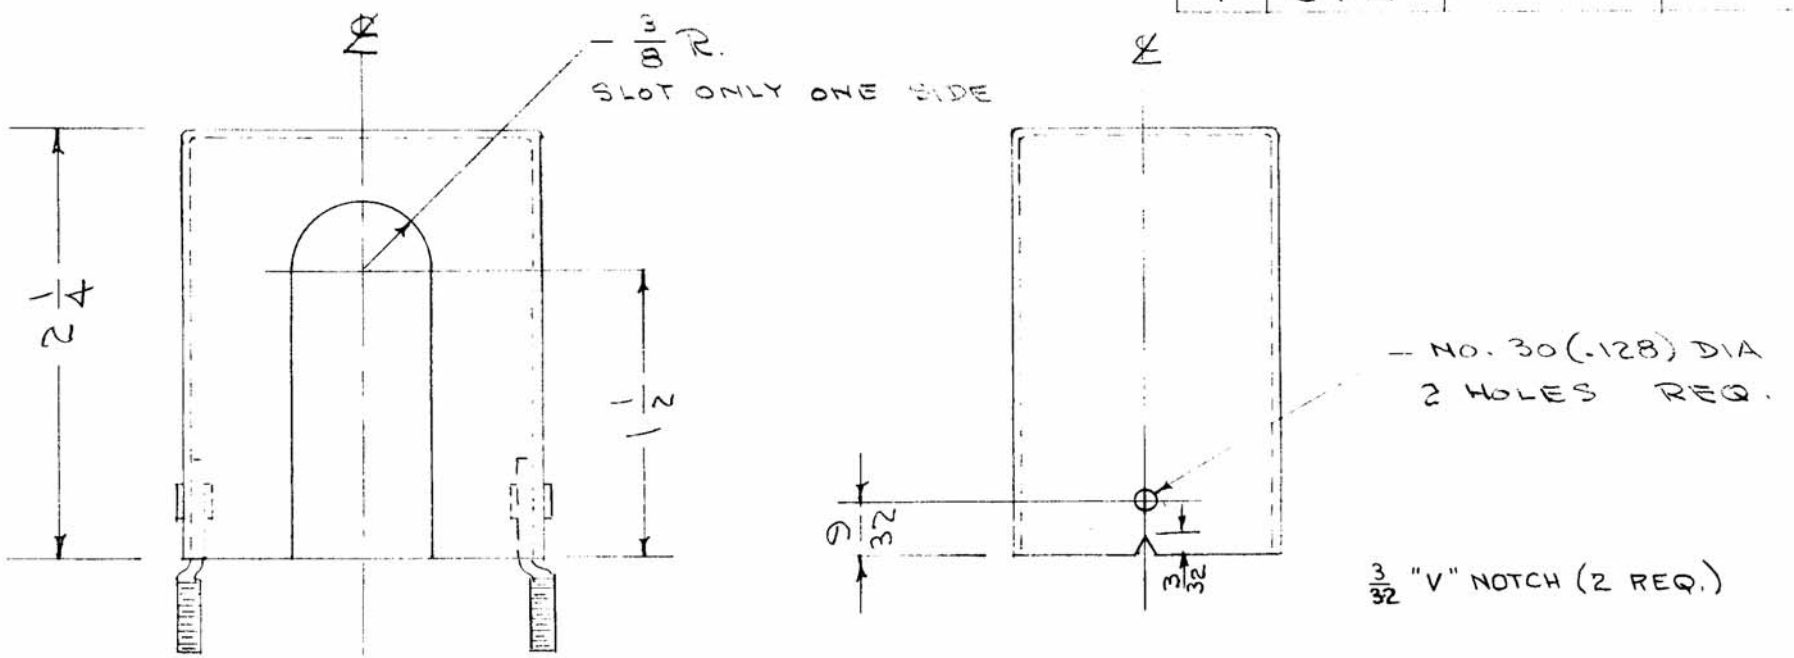

3/32 "V" NOTCH (2 REQ.)

MODIFY BX-102-1 AS SHOWN ABOVE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	3	EY-100-1	EYELET, FLAT FLANGE	
2	2	SC-107-1	LUG, SPADE	
1	1	BX-102-1	CAN (MODIFIED AS SHOWN)	

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
F	1	FIN. S404 IRIDITE WAS CAUSTIC DIP	12-4-59	1001			
E	1	FIN. WAS S101, S114 & S115.	7/25/58	2			
D	1	"V" NOTCH ADDED	11/21/56	1			
—	—	REDRAWN	8/30/57	—			

TOLERANCES

ALL OTHERS: DEC. DIM. ±; FRAC. DIM. ± 1/64; ANGULAR DIM. ±

SCALE

DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

BX-102-1

STOCK SIZE

MATERIAL | WEIGHT PER PC.

TYPE & TEMPER

HEAT TREAT. SPEC.

S404 IRIDITE

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

OSCILLATOR COVER CAN

CFA.

DRAWN	ELEC. DES. APP.	MECH. DES. APP.
CDD. 8/30/57		

CHECKED	FINAL APPROVAL
	AJJ

A-399 F

FORM — 108