



- UNLESS OTHERWISE SPECIFIED -
 1- ALL LETTERING TO BE 5/64 HIGH BLACK
 GOTHIC, STROKE .010.
 2- MARKING PROCESS AS PER TMC SPEC S-727.
LETTERING
 (A-3322-1)

B
A 3322

| REVISIONS | | | | | | |
|-----------|---|---------|------------|-------|------|------|
| SYM | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD | APPD |
| XI | TMC SPEC ADDED | 4/13/64 | XI | A.M. | @ | |
| O | ORIGINAL RELEASE FOR PRODUCTION | 4/24/64 | O | A.M. | | |
| A | ITEMS 9 THRU 13 ADDED, REAR VIEW ADDED ITEM 9 WAS PC 101, ITEM 6 WAS TS102-POI, ITEMS 2, 3, 4 & 7 WERE TOL. "K" | 6/24/64 | 11621 | A.M. | | JKL |
| B | DELETED RC20GF473J (R6052), IT. 4 ADDED, | 3-16-66 | 15936 | | | |

ASSEMBLY NOTICE

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH PLATED-THRU HOLES & BEND ABOUT 1/16 OF LEAD OVER COPPER FOIL AS SHOWN.
2. APPLY HEAT & SOLDER TO LEAD & FOIL-CAUTION-TOO MUCH HEAT WILL CAUSE THE FOIL TO SEPARATE FROM THE BOARD.
3. CLEAN & INSPECT PER S-676.
4. FUNGUS PROOFING PER TMC SPECIFICATION S-113.

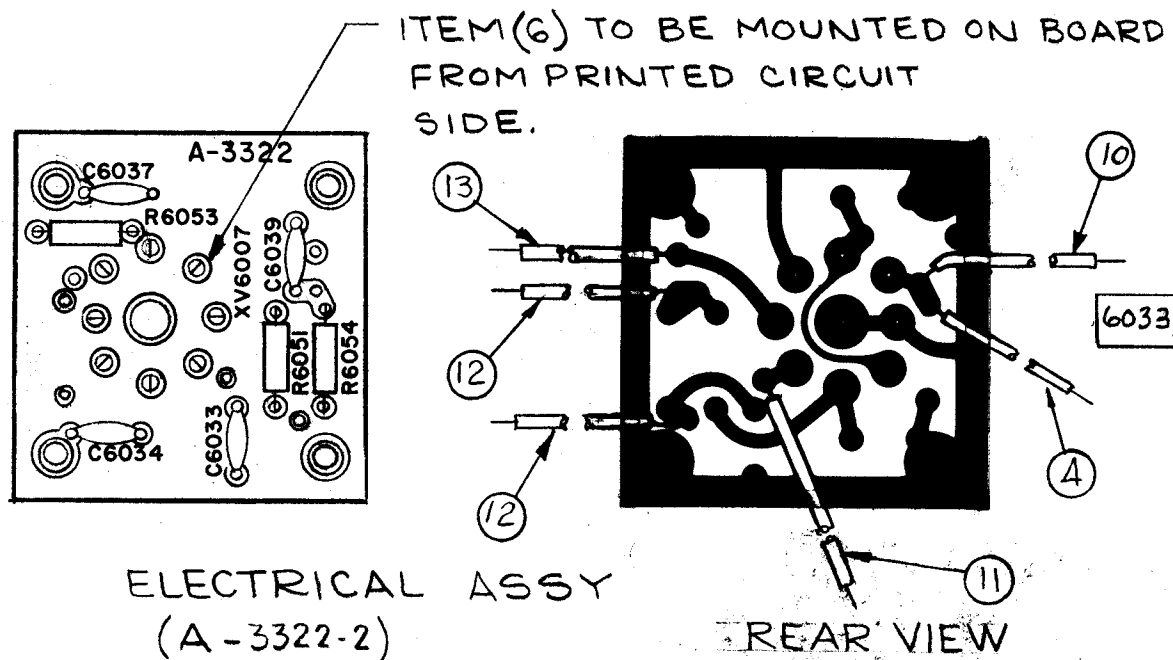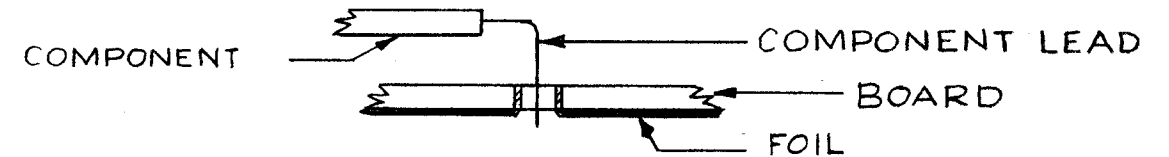

| 10 | 13 | MWC22(7)U1 | WIRE, ELEC, INS. | BRN |
|--------|------|-------------|---------------------------------|---------|
| 20 | 12 | MWC22(7)U2 | | RED |
| 10 | 11 | MWC22(7)U92 | | WHT/RED |
| 10 | 10 | MWC22(7)U5 | WIRE, ELEC, INS. | GRN |
| 1 | 9 | CC100-28 | CAPACITOR, FIXED, CER, DISC | C6037 |
| X | 8 | BS 100 | SOLDER, SOFT | |
| 1 | 7 | RC20GF153J | RESISTOR, FIXED, COMPOSITION | R6051 |
| 1 | 6 | TS160-1 | SOCKET, TUBE (7 PIN) | XV6007 |
| 3 | 5 | CC 100-32 | CAPACITOR, FIXED, CERAMIC, DISC | |
| 10 | 4 | MWC22(7)U6 | WIRE, ELECT, INS. | BLUE |
| 1 | 3 | RC20GF472J | RESISTOR, FIXED, COMPOSITION | R6054 |
| 1 | 2 | RC20GF391J | RESISTOR, FIXED, COMPOSITION | R6053 |
| 1 | 1 | PC 101-3 | PRINTED CIRCUIT BOARD | |
| REQ'D. | ITEM | PART NUMBER | DESCRIPTION | SYMBOL |

| AALTONEN | | LIST OF MATERIAL | |
|---|--|---|---|
| MATERIAL | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | |
| FINISH | | TITLE PRINTED CIRCUIT BOARD ASSY (V6007 TUBE) | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | DRAWN: <i>G. Swan</i> CHECKED: <i>A. Swan</i> ELECT. DES: <i>J. K.</i> MECH. DES: <i>J. K.</i> | DATE: 10-17-63 DATE: 2-18-64 DATE: 2/18/64 DATE: 2-17-64 |
| DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 | | TOLERANCES ± 1/64 ANGLES ± 0° 30' | |
| Q'TY./UNIT SCALE: 1:1 | | MODEL USED ON CODE: A | |
| ASS'Y. NO. | | FINAL APPROVAL <i>RDE</i> DATE: 4/22/64 | |
| THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN. | | SHEET: A-3322 REV. LTR.: B | |

NOTES