


"Q" TEST FREQ.	"Q" MIN.	EXT. CAP. Q METER	NO. CODE	SYMBOL	INDUCTANCE 10KC BRIDGE
1.0MC	90	1000 PT	-	-	26μh ± 1μh

A3948


REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
X	EXPER. RELEASE	3-16-65	X	HCA	
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-7-65	Ø	J.L.	

WINDING PROCEDURE

1. PRIMARY WIND 49 TURNS OF ITEM 2 ON ITEM 1, STAKE WITH ITEM 3.
2. SECONDARY- WIND 9 TURNS OF ITEM 6 OVER PRIMARY AND IN THE SAME DIRECTION STAKE WITH ITEM 3.
3. SECONDARY WINDING MUST BREAK OUT FROM OPPOSITE SIDE OF PRIMARY.
4. BAKE COIL FOR 15 MIN. AT 150°F, REMOVE FROM OVEN AND COAT COIL WITH ITEM 4.
5. COLOR CODE TERMINALS ON BASE AS SHOWN.
6. STRIP AND TIN LEADS TO WITHIN 1/4" OF COIL.
7. PLACE ITEM 1 OVER SLUG ON BASE, TAKING CARE TO POSITION NOTCHES ON RAISED PART OF BASE.
8. SOLDER ALL LEADS TO PROPER COLOR-CODED TERMINALS ON BASE.
9. ASSEMBLE AS PER ASSEMBLY DRAWING, PLACE IN CASE; BEND THE 4 TABS DOWN IN THE NOTCHES.
10. DO NOT CUT OFF THE TWO LONG TABS.
11. DELETED
12. STAMP TMC PART NO. AS SHOWN
13. TEST INDUCTANCE, AND Q AS SHOWN ABOVE. SET INDUCTANCE FIRST.
14. BAKE COMPLETED ASSEMBLY FOR ONE HOUR AT 212°F.
15. REMOVE COMPLETED ASSEMBLY FROM OVEN AND ALLOW TO COOL TO ROOM TEMPERATURE.
16. REPEAT STEP NO. 13.
17. TEST COIL WITH A 1/4% 10KC UNIVERSAL BRIDGE.(INDUCTANCE ONLY)
18. TUNE THE CORE INTO THE COIL TO REACH THE INDUCTANCE AS SHOWN ABOVE.
19. TEST COIL WITH "Q" METER 260A(FOR "Q" ONLY).
20. SET THE TEST FREQUENCY AS SHOWN ABOVE. AND SET THE (MULTIPLY "Q" BY) TO 1
21. TUNE THE INDUCTANCE DIAL. TO REACH THE MAX. READING ON THE "Q" METER.

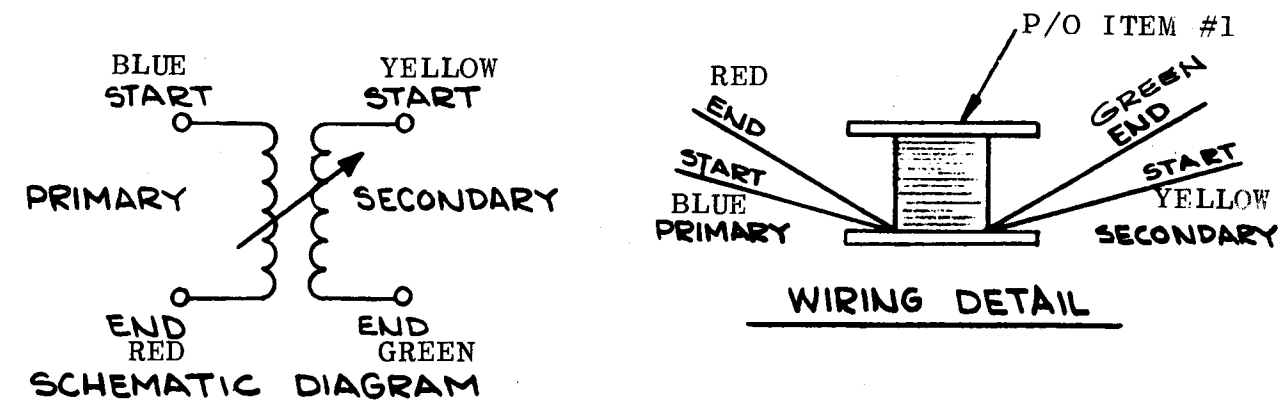

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	6	WI-141-32-5	WIRE, ELECTRICAL	
X	5	BS-100	SOLDER, SOFT	
X	4	GL-130	ADHESIVE, Q-DOPE	
X	3	GL-103	ADHESIVE, N-CEL	
X	2	WI-104-7/43 ENGS	WIRE, ELECTRICAL, LITZ SN	
-	-	-	-	-
1	1	CI-136-2	CORE, ADJUSTABLE TUNING	

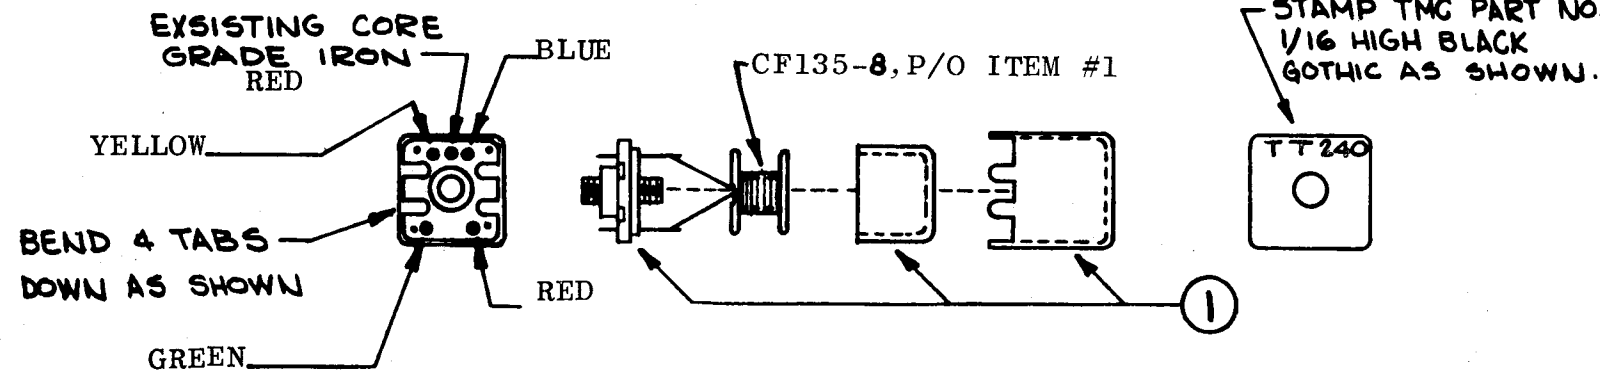

M. GELLMAN LIST OF MATERIAL			
MATERIAL		THE TECHNICAL MATERIEL CORP.	
FINISH		MAMARONECK, NEW YORK	
TITLE		TT-240	
TRANSFORMER, RF, (ADJUSTABLE)		DATE	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN H. AUSTIN	DATE 3-16-65	FINAL APPROVAL
DECIMALS .1 ± .05 .XX ± .01 .XXX ± .005	CHECKED	DATE 3-29-65	
FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES.	DATE	
TOLERANCES	MECH. DES.	DATE	
			A-3948
			SHEET
			REV. LTR.

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

4	LFSB-1	A-3788
QTY./UNIT	MODEL USED ON	ASSY. NO.
SCALE	CODE	
	A	