HOLES —

A - 5/64 DIA (5 REQ.)

B - 5/32 DIA (2 REQ.)

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	A 4229	Ø
1	SBE-2A	A4230	4-12-65		

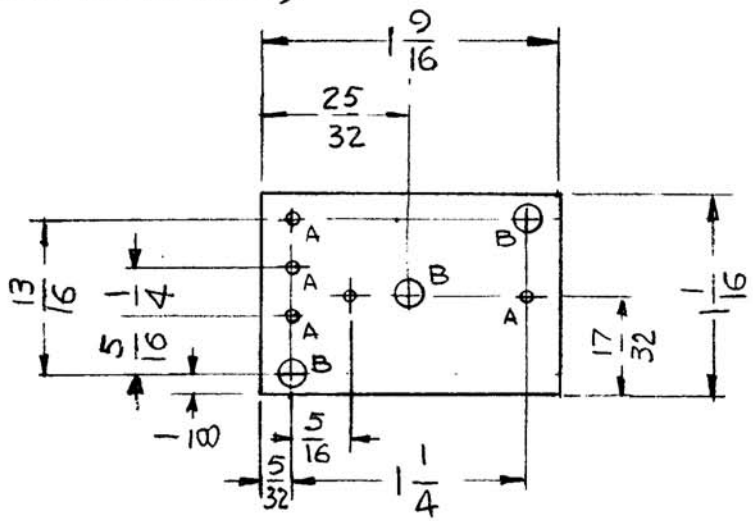

MACHINING (A4229-1)

1/16 THK. XXXP PHENOLIC, NATURAL

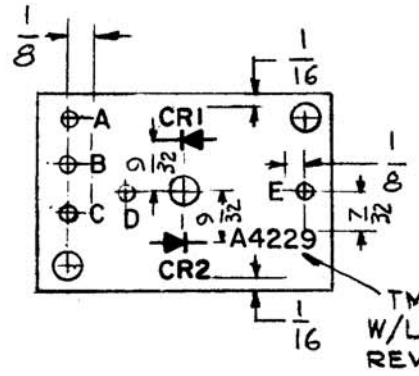

LETTERING (A4229-2)

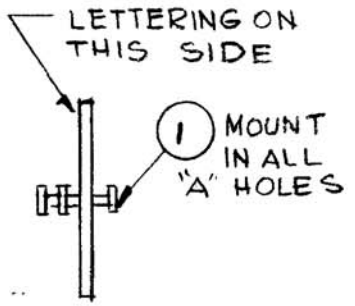

SUB-ASSY (A4229-3)

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.

LETTERING: 3/32 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

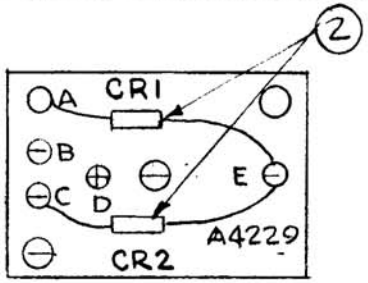

FINAL ASSY (A4229-4)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	3	BS 100	SOLDER, TIN ALLOY	
2	2	IN34A	DIODE, XTAL	CR1, CR2
5	1	TE 168-4	TERMINAL, STUD	A

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	4-15-65		G.D.L		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES — DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

CODE A

STOCK SIZE: *

MATERIAL: *

TYPE & TEMPER: * | HEAT TREAT. SPEC.: *

FINISH & SPEC. NO.: *

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TERMINAL BOARD
(HF MODULATOR)

DRAWN	CHECKED	FINAL APPROVAL
G.D.L		

ELEC. DES. APP. | MECH. DES. APP.

A4229 Ø

TMC FORM 108-A

REPROVEL NO. 440H 23845