
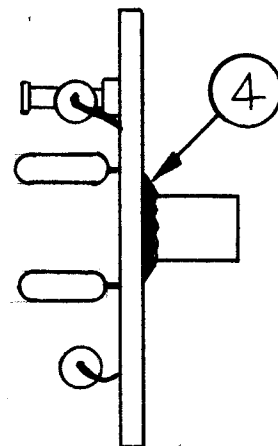


A4449

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	ORIGINAL RELEASE FOR PRODUCTION	8/19/67	Ø			

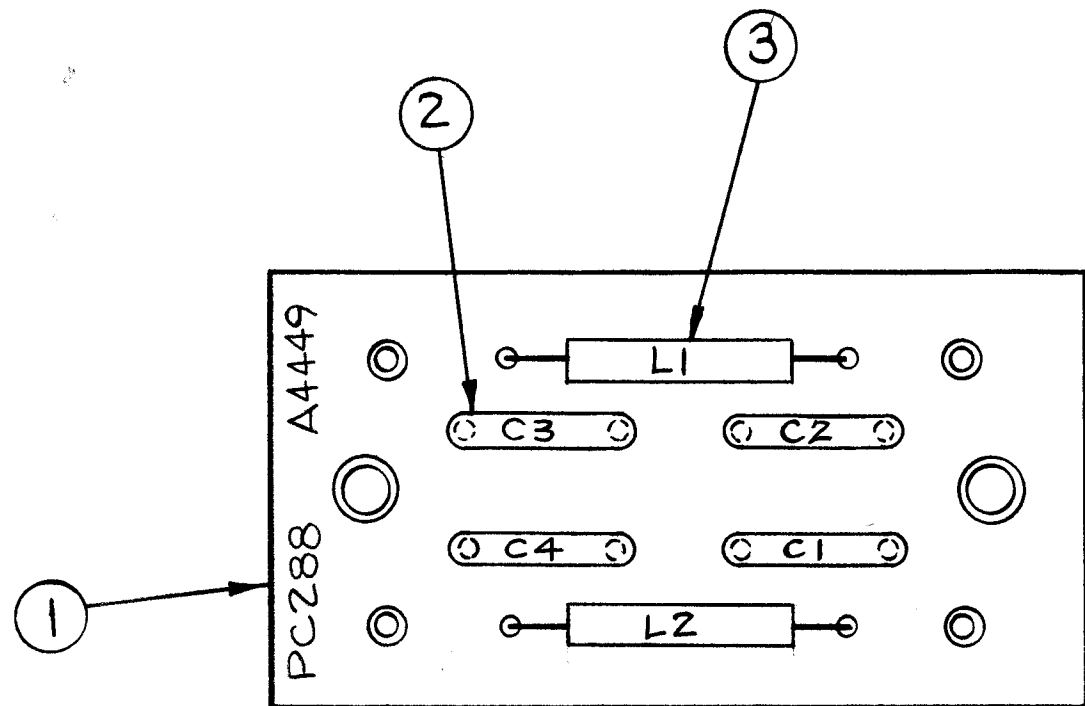

TO IMPROVE ELECTRICAL CONTACT SOLDER TO BOARD.

NOTE:

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH HOLES.
2. APPLY HEAT AND SOLDER TO LEAD & FOIL CAUTION: TO MUCH HEAT WILL CAUSE THE FOIL TO SEPARATE FROM THE BOARD.
3. CLEAN AND INSPECT PER S676
4. FUNGUS PROOFING PER TMC SPEC, S113.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	4	BS100	SOLDER, TIN ALLOY	~
2	3	CL270-8.2	COIL RF FIXED	L1, L2
4	2	CC100-37	CAP, FXD CER	C1 THRU C4
1	1	PC288	PRINTED, CIRCUIT BOARD	~

LIST OF MATERIAL

MATERIAL	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH	TITLE ASSY, PRINTED CIRCUIT BD.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN K. Urzo	DATE	FINAL APPROVAL [Signature]
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED	DATE	DATE 8/12/67
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES.	DATE	A4449
TOLERANCES		MECH. DES.	DATE	
			SHEET	REV. LTR.

TRX-1		ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	
SCALE 2:1	CODE	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

NOTES