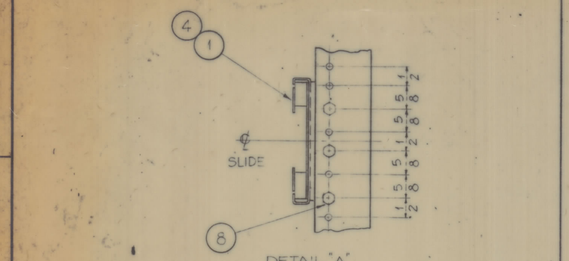

DETAIL "A"
SLIDE MOUNTING

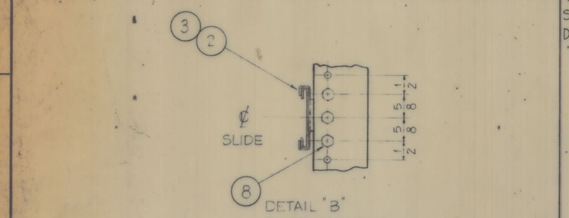

DETAIL "B"
SLIDE MOUNTING

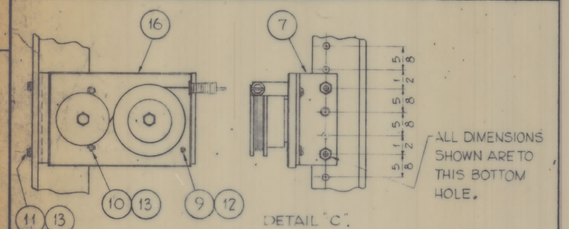

ALL DIMENSIONS SHOWN ARE TO THIS BOTTOM HOLE.

DETAIL "C"
NEGATOR MOUNTING, RIGHT SIDE
(FACING FRONT OF UNIT)

DETAIL "D"
NEGATOR MOUNTING,
LEFT SIDE
(FACING FRONT OF UNIT)

NOT SHOWN IN
SECTION - A-A



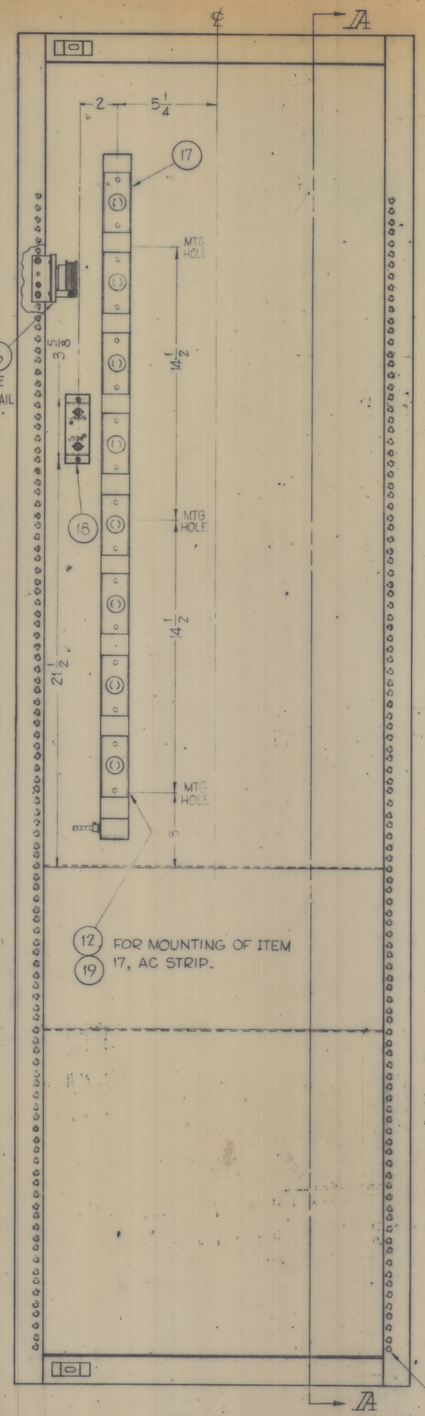

~ FRONT ~

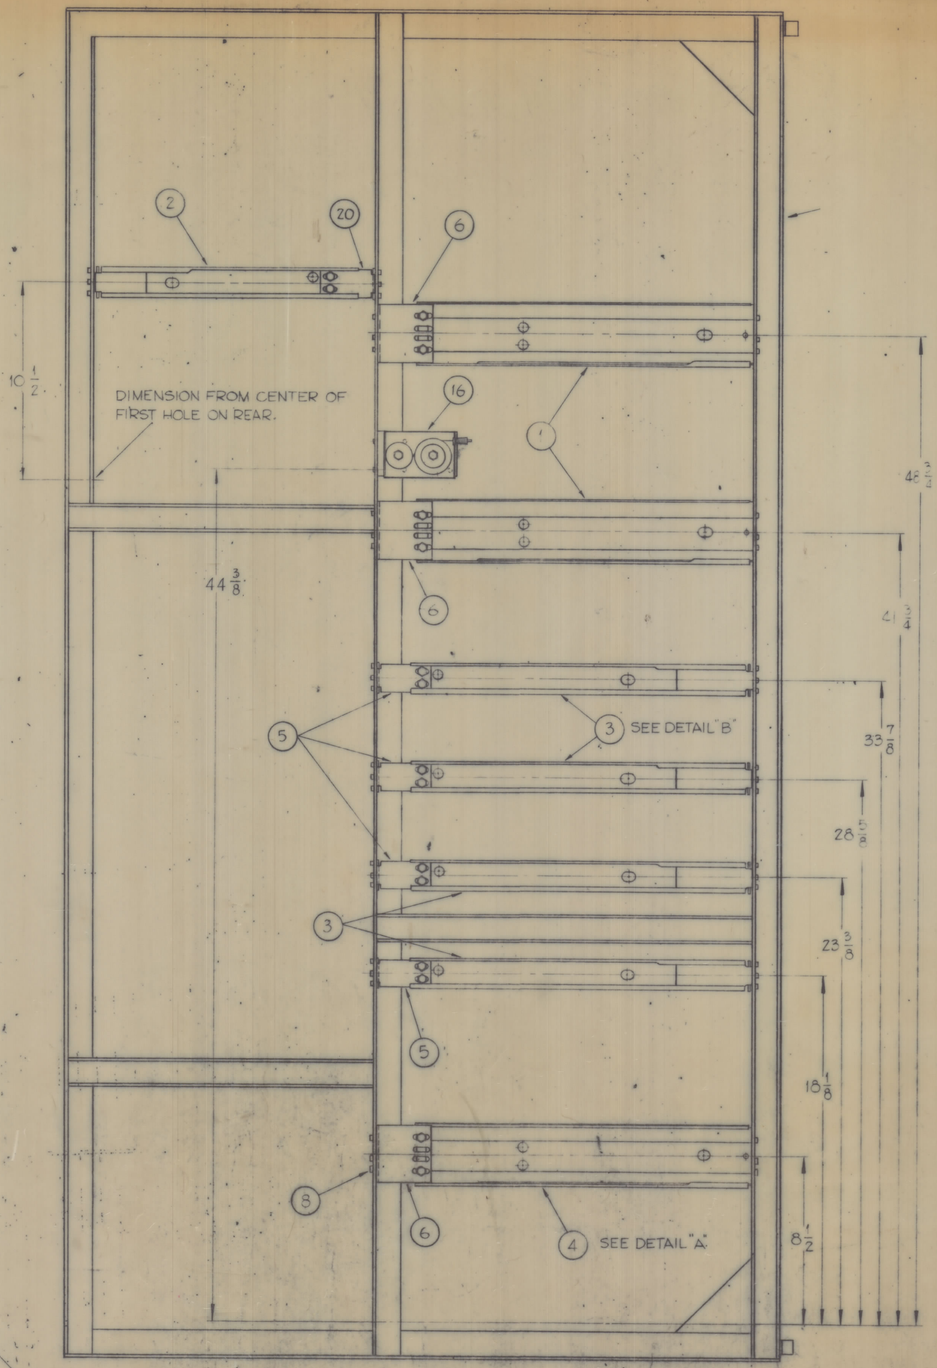

SECTION ~ A-A

ALL DIMENSIONS FOR SLIDES AND NEGATORS TAKEN FROM THE CENTER OF THE FIRST HOLE.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	21	TK108-14	TRACK, SET, FXD	
2	20	MS-2482	BRACKET, EXTENSION (FOR CPP-1)	
5	19	SCBS0632BN5	SCREW, MACHINE	
1	18	A-2048-2	ATTENUATOR ASS'Y	
1	17	AX-147	AC POWER STRIP (8 CONNECTOR)	
3	16	SP-137-1	NEGATOR	
4	15	NTH1032BN12	NUT, HEXAGON, DOUBLE CHAMFER	
128	14	LWS10MRN	LOCKWASHER, SPRING TYPE	
8	13	LWE10MRN	LOCKWASHER, EXTERNAL TOOTH	
7	12	LWE06MRN	LOCKWASHER, EXTERNAL TOOTH	
4	11	SCBS1032BN8	SCREW, MACHINE	
4	10	SCBS1024BN6	SCREW, MACHINE	
2	9	SCBS0540BN6	SCREW, MACHINE	
140	8	SCHH1032SN8	SCREW, HEXAGON HEAD	
3	7	MS 2470	BRACKET, NEGATOR MOUNTING	
6	6	MS-2458	ADAPTER, BKT, REAR 3" SLIDE	
8	5	MS-2457	ADAPTER, BKT, REAR 1-3/4" SLIDE	
1	4	TK106-18	SLIDE, STATIONARY	
5	3	TK108-18	SLIDE, TILT	
1	2	TK105-14	SLIDE, TILT	
2	1	TK107-18	SLIDE, TILT	

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKED	ENG. APP.
Ø		ORIGINAL RELEASE FOR PRODUCTION	6/29/69	Ø	CW		
X		EXPERIMENTAL RELEASE	9-2766	X	RME		

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE 1/4, Do Not Scale

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
	GPT 10 KLF		AX534	9-27-66

USED ON

STOCK SIZE
MATERIAL
TYPE & TEMPER | HEAT TREAT. SPEC.
FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

ASSEMBLY, AC POWER STRIP, SLIDES AND NEGATORS (SP-137)

DRAWN: RME 9/26/66 | CHECKED: [illegible] | FINAL APPROVAL: [illegible] 6/29/69

ELEC. DES. APP. | MECH. DES. APP.

A4497

SHEET OF

A4497

TMC FORM NO. 111

DEFIANCE NO. 1050