


A 4549

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXP RELEASE					
XI	REVISED & UPDATED	5/26/69		GE	JH	S.M.M.
Ø	ORIGINAL RELEASE FOR PRODUCTION	6/10/69		CU		

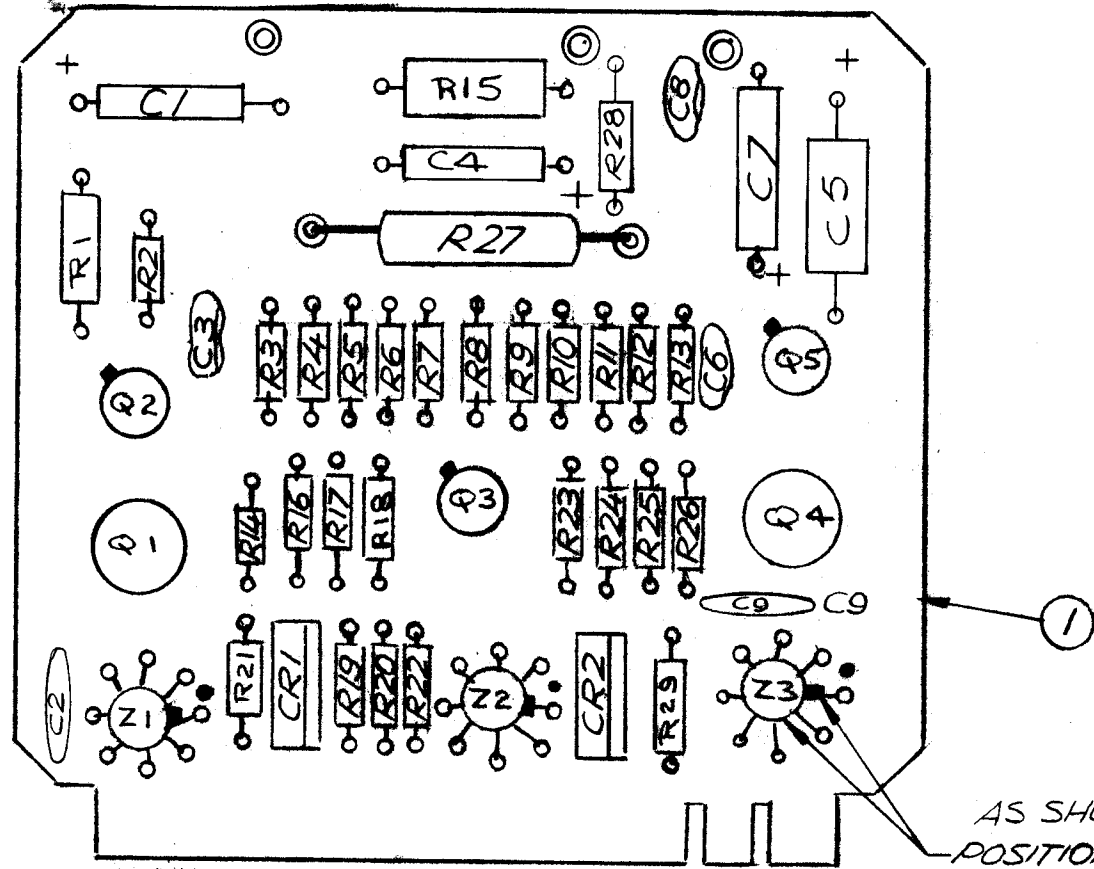

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH PLATED THRU-HOLES.
2. CAUTION: WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL.
3. CLEAN AND INSPECT AS PER TMC SPEC S676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A4549.
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.

NOTES

RTNU-41,42		ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	
SCALE	CODE	8401-451
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

1	1	PC352	PRINTED CIRCUIT BOARD
REQ'D.	ITEM	PART NUMBER	DESCRIPTION
LIST OF MATERIAL			
MATERIAL		THE TECHNICAL MATERIEL CORP.	
FINISH		MAMARONECK, NEW YORK	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		ASSEMBLY, PC BOARD POWER SUPPLY	
DRAWN	KH	DATE	FINAL APPROVAL
CHECKED	JH	DATE	6-6-69
ELECT. DES.		DATE	
MECH. DES.	R. Ugo	DATE	
DECIMALS		FRACTIONS	
.X ± .05		± 1/64	
.XX ± .01		ANGLES	
.XXX ± .005		± 0° 30'	
TOLERANCES		A 4549	
		SHEET	
		REV. LTR.	