



100 357 17 4565

C1, C2 MTG DETAIL
NOTE: INSERT
COMPONENT LEAD
THRU TERMINAL
AS SHOWN

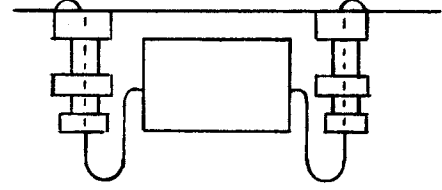


100 WPM

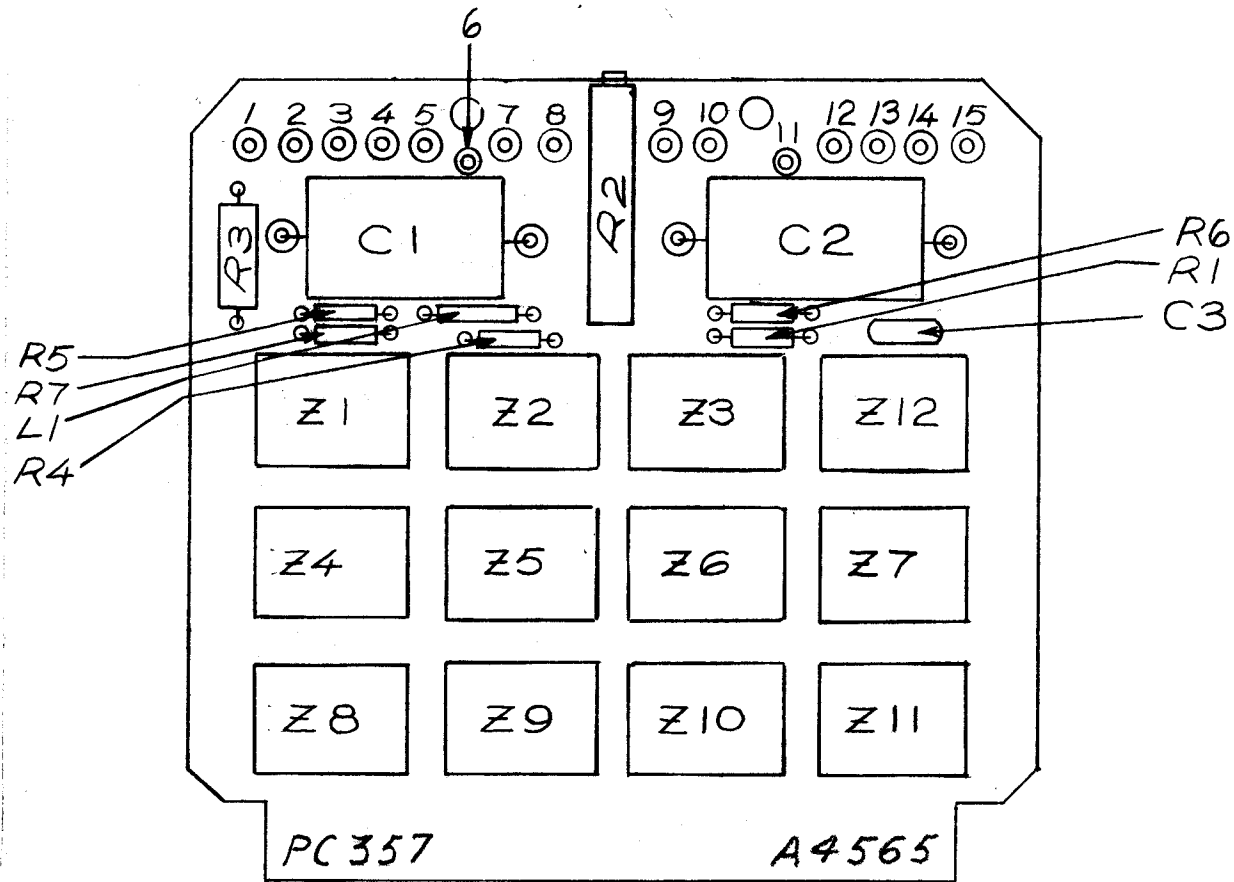

FOR 100 WPM OPERATION ASSEMBLE C1 & C2
AS SHOWN IN UPPER PICTORIAL

FOR 60 WPM OPERATION ASSEMBLE C1, C5 & C2, C4
AS SHOWN IN LOWER PICTORIAL

60 WPM

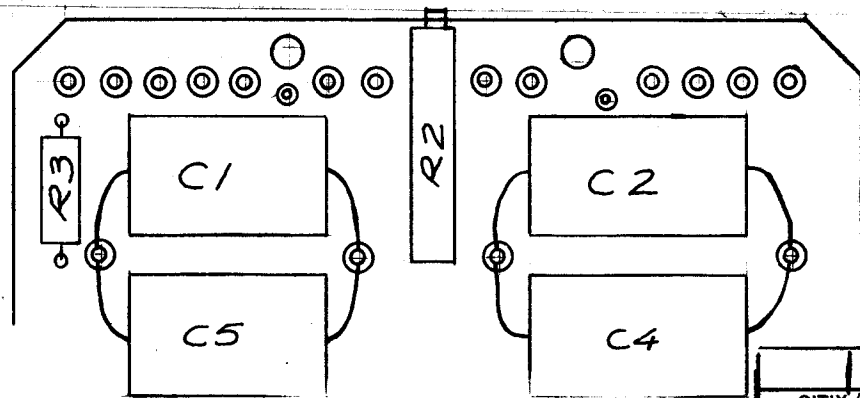

NOTES

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
	A	3401-451

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY
OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR
REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

A4565

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	2/25/69		GE	MS	
Ø	ORIGINAL RELEASE FOR PRODUCTION	8/18/69		W		

ASSEMBLY NOTES

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH PLATED THRU-HOLES.
2. CAUTION: WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL
3. CLEAN AND INSPECT AS PER TMC SPEC S676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A4565
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE,

1	1	PC357	PRINTED CIRCUIT BOARD	
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		TITLE ASSEMBLY, PC BOARD 'TIMING CIRCUIT'		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN GE	DATE	FINAL APPROVAL S. DiMarco
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED Jde	DATE 1-10-69	DATE 8-18-69
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES.	DATE	
TOLERANCES		MECH. DES. R. 2/30	DATE 6-13-69	
			A 4565	Ø
			SHEET	REV. LTR.