


TMC PT. NO.	DESCRIPTION
A 4684-1	AS SHOWN
A 4684-2	REVERSE DIODE ◀ SYM.

REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXP. RELEASE	1/31/68	-H	Emp	MJS
	Ø	ORIGINAL RELEASE	7/22/69	Ø	Emp	Jha
	A	IT.3 THRU 7 ADD. NOTE 4 DELE.	11/16/69	19651	Emp	MJS

\* MARK ◀ SYMBOL UPON ASSEMBLY

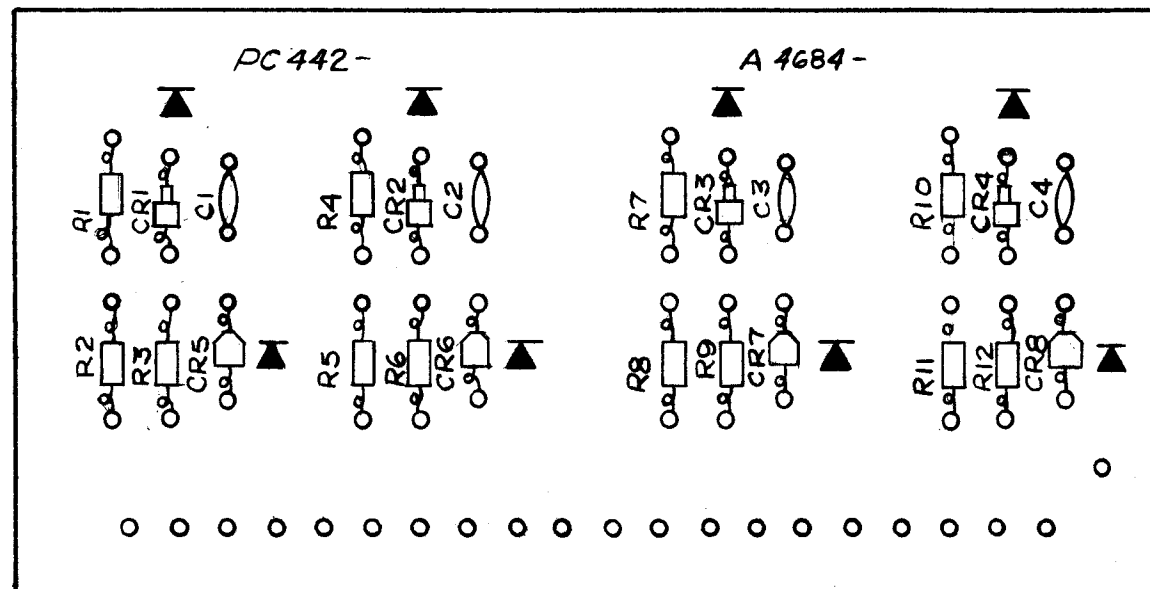

- PROCEDURE**
- 1- TO MOUNT COMPONENTS INSERT LEADS THROUGH PLATED THRU-HOLES.
  - 2- USE CAUTION WHEN APPLYING HEAT & SOLDER TO LEAD AND FOIL.
  - 3- CLEAN AND INSPECT AS PER S676.
  - 4-
  - 5- USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.

8	7	RC206F102J	1K 1/2 W RES.	R2-3-5-6 -8-9-11-12
4	6	RC206F271J	270 1/2 W RES.	R1-4-7-10
4	5	1N2484	DIO	CR5-6-7-8
4	4	1N3025B	DIO, ZENER	CR1-2-3-4
4	3	CC100-43	.01MMF 100V.	C1-2-3-4
X	2	BS-100	SOLDER, TIN ALLOY	
1	1	PC 442-	PRINTED CIRCUIT BOARD	1
REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.

B.NAP LIST OF MATERIAL			
FINAL APPROVAL		DATE	7/22/69
MECH. DES.		DATE	
ELECT. DES.		DATE	22 APR 69
CHECKED		DATE	1/31/68
DRAWN		DATE	1-31-68
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
B	82679	A 4684	A
SCALE	SHEET		OF
	1		

1	TCRM-1	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
	CODE	S401-451
<p><b>NOTICE TO PERSONS RECEIVING THIS DRAWING</b>          THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.</p>		
MATERIAL		
FINISH		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	
DECIMALS	FRACTIONS
.X ± .05	1/64
.XX ± .01	TOLS. ANGLES
.XXX ± .005	0° -30'