


		REVISIONS					
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	X	EXP. RELEASE	2/25/69			KLH	
	Ø	ORIGINAL RELEASE FOR PRODUCTION	8/26/69			KLH	
	A	REVISED TO DETWORK	11/16/69	19638		KLH	OP 210
	B	REVISED TO ARTWORK	8/27/70	19340		KLH	OP 210
	C	REVISED C69	11/13/70	20110		RJ	OP 210

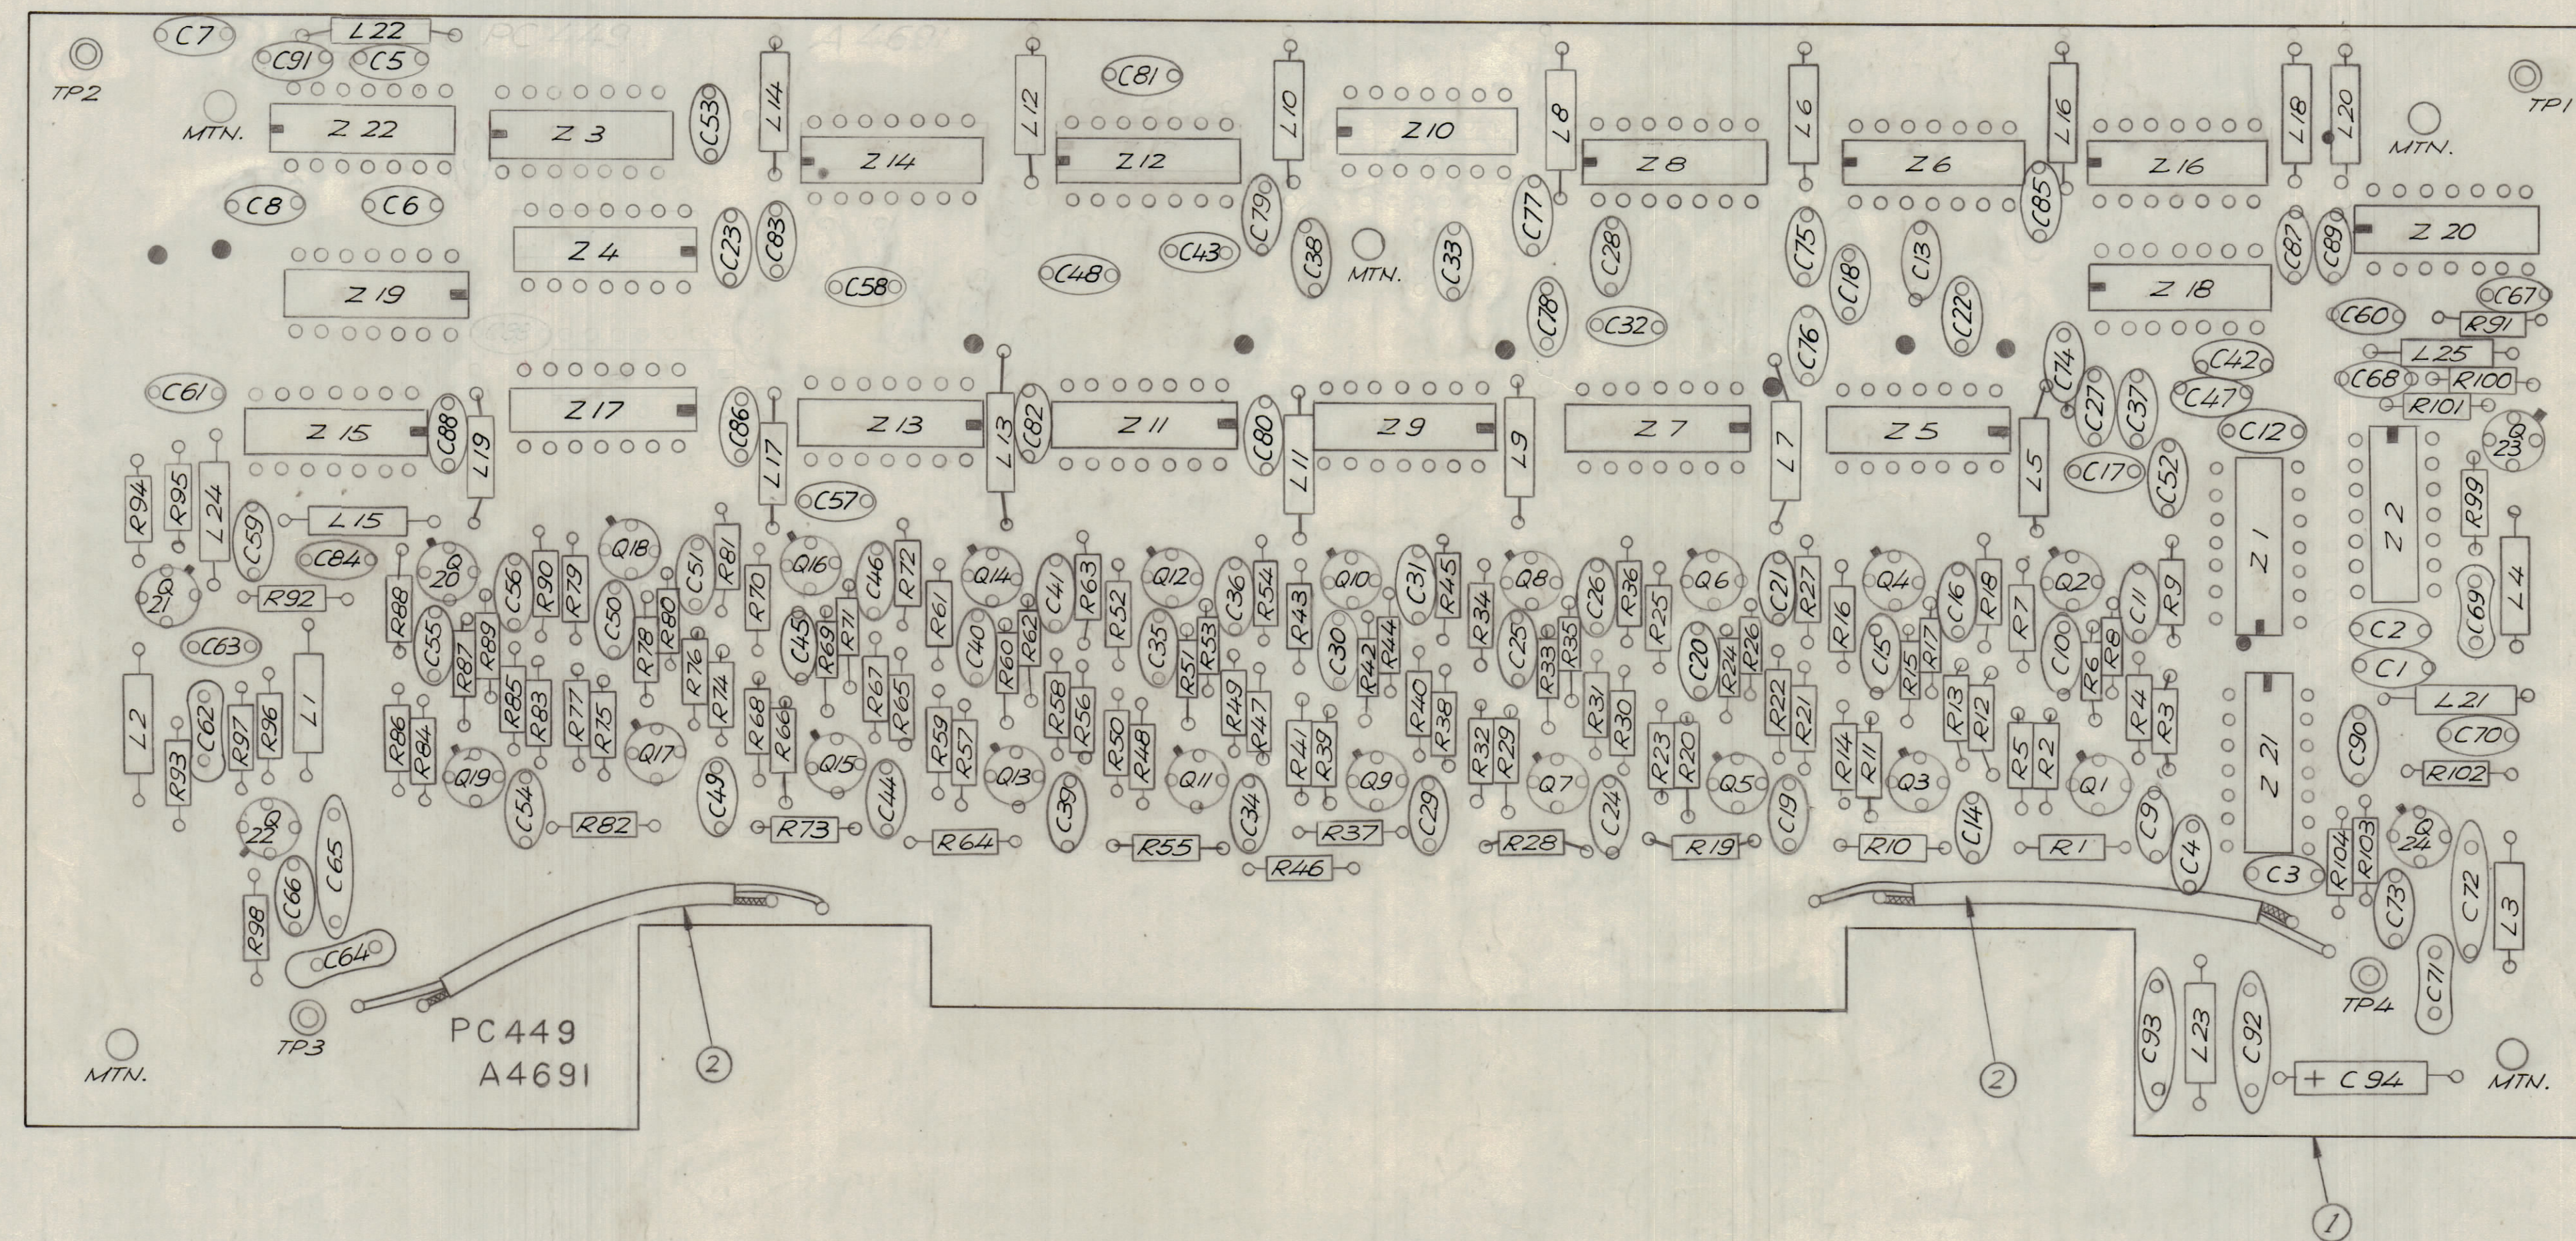

**ASSEMBLY NOTES:**

1. TO MOUNT COMPONENTS, INSERT LEADS THROUGH PLATED THRU-HOLES
2. CAUTION, WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL.
3. CLEAN AND INSPECT AS PER SPEC. S 676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A 4691.
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.

**63 Fig 5-82**  
**64 Fig 5-79**

QTY	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	3		BS 100	SOLDER, TIN ALLOY	
X	2		CA 1465 - 1	CABLE, COAXIAL, MIN.	
/	1		PC 449	PRINTED CIRCUIT BOARD	

**LIST OF MATERIAL**

FINAL APPROVAL	DATE	THE TECHNICAL MATERIEL CORP.	
<i>[Signature]</i>	8/18/69	MAMARONECK, NEW YORK	
Mech. DES.	DATE	ASSY. PRINTED CIRCUIT BD.	
ELECT. DES.	DATE	FREQUENCY MATRIX # 1, 2	
CHECKED	DATE	SIZE	CODE IDENT. NO. DWG. NO.
DRAWN	DATE	D	82679 A 4691
		ISSUE	C
		SCALE	2:1
		SHEET	OF

2	HFSR - 4	AX 5022
QTY / UNIT	MODEL USED ON	ASSY NO.
APPLICATION		
CODE		

**NOTICE TO PERSONS RECEIVING THIS DRAWING**  
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.