


RSSA 6YA READBACK SELECTION CHART

TMC PT. NO	XMTR	CR7	CR6	CR5	CR4
A4785-1	1	✓	✓	✓	✓
A4785-2	2	✓	✓	✓	*
A4785-3	3	✓	✓	*	✓
A4785-4	4	✓	✓	*	*
A4785-5	5	✓	*	✓	✓
A4785-6	6	✓	*	✓	*

REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD
	X	EXP. RELEASE	11/26/69			
	Ø	ORIGINAL RELEASE	1/15/69	Ø		

* DENOTES REMOVAL OF DIODES

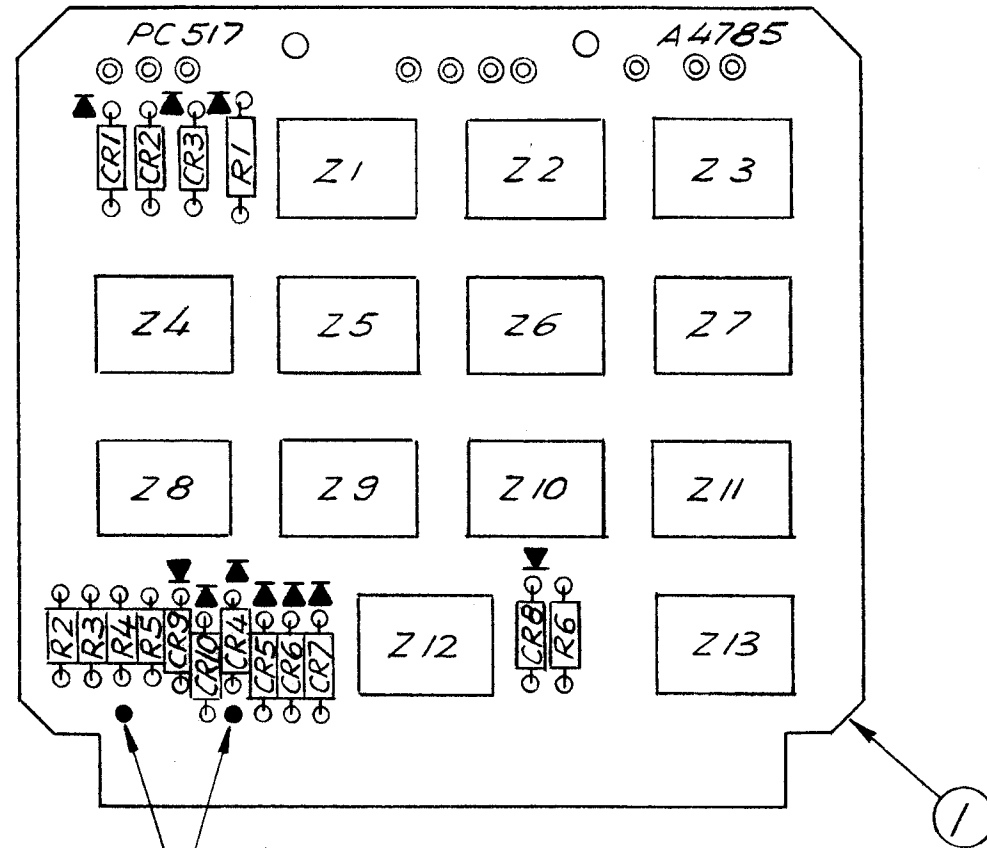

FEED THRU-HOLE FILL WITH SOLDER

ASSEMBLY NOTES:

1. TO MOUNT COMPONENTS, INSERT LEADS THROUGH PLATED THRU-HOLES.
2. CAUTION WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL.
3. CLEAN AND INSPECT AS PER TMC SPEC. S 676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A 4785
5. USE SYMBOL NUMBERS FOR ASS'Y REFERENCE.

X	2	BS 100	SOLDER, TIN ALLOY	
1	1	PC517	PRINTED CIRCUIT BOARD	
REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.

LIST OF MATERIAL

QTY / UNIT	MODEL USED ON	ASS'Y NO.
	RTTD-5A	
APPLICATION		
	CODE	

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

(REF. CK 1667)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005
 FRACTIONS: 1/64
 TOLS. ANGLES: 0°-30'

MATERIAL

FINISH

FINAL APPROVAL: *J. Di Marco* DATE: 12-31-69
 MECH. DES. DATE
 ELECT. DES. DATE
 CHECKED: *M. Ruppel* DATE: 11-20-69
 DRAWN: *E. Hill* DATE: 11/24/69

THE TECHNICAL MATERIEL CORP.
 MAMARONECK, NEW YORK

ASS'Y PRINTED CIRCUIT BOARD

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
B	82679	A4785	Ø
SCALE	SHEET		OF