


APPLICATION			REVISIONS						
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	MMX () -2		0	ORIG RELEASE FOR PROD	5/9/71		CU		GE

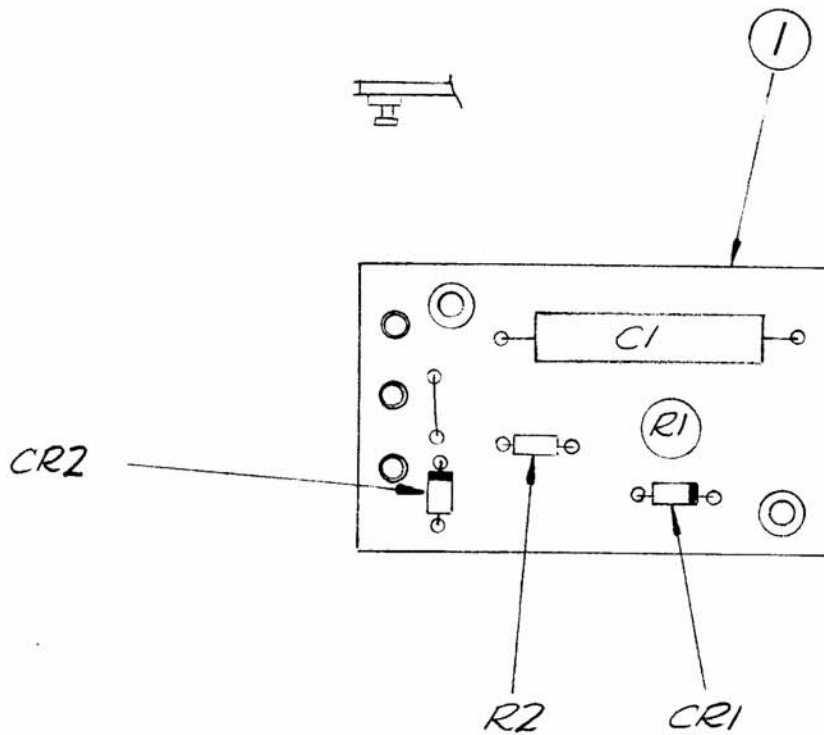

ASSEMBLY NOTES

1. TO MOUNT COMPONENTS INSERT LEADS THROUGH PLATED THRU HOLES.
2. **CAUTION** WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL.
3. **CLEAN AND INSPECT** AS PER SPEC S676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A 4874
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
X	2	BS 100	SOLDER TIN ALLOY	
1	1	PC-596	P.C. BOARD	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS	TOLS.	ANGLES
.X ± .05	1/64		
.XX ± .01			0° - 30'
.XXX ± .005			

MATERIAL	FINAL APPROVAL	DATE
FINISH	MECH. DES.	DATE
	ELECT. DES.	DATE
	CHECKED	DATE
	DRAWN	DATE

LIST OF MATERIAL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

ASSY. P.C. BOARD

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	A 4874	1
SCALE 1:1	SHEET		OF