


REVISIONS							
E.M.N.O	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE	APPROVED
		CS			ORIGINAL Release	8-31-73	
21474	W	WA		A	J101 (H) OUTPUT COMB, C19, C20 Added	8-31-76	JPB
21508	W	WA		B	Item 3 & 4 Added	9-20-78	

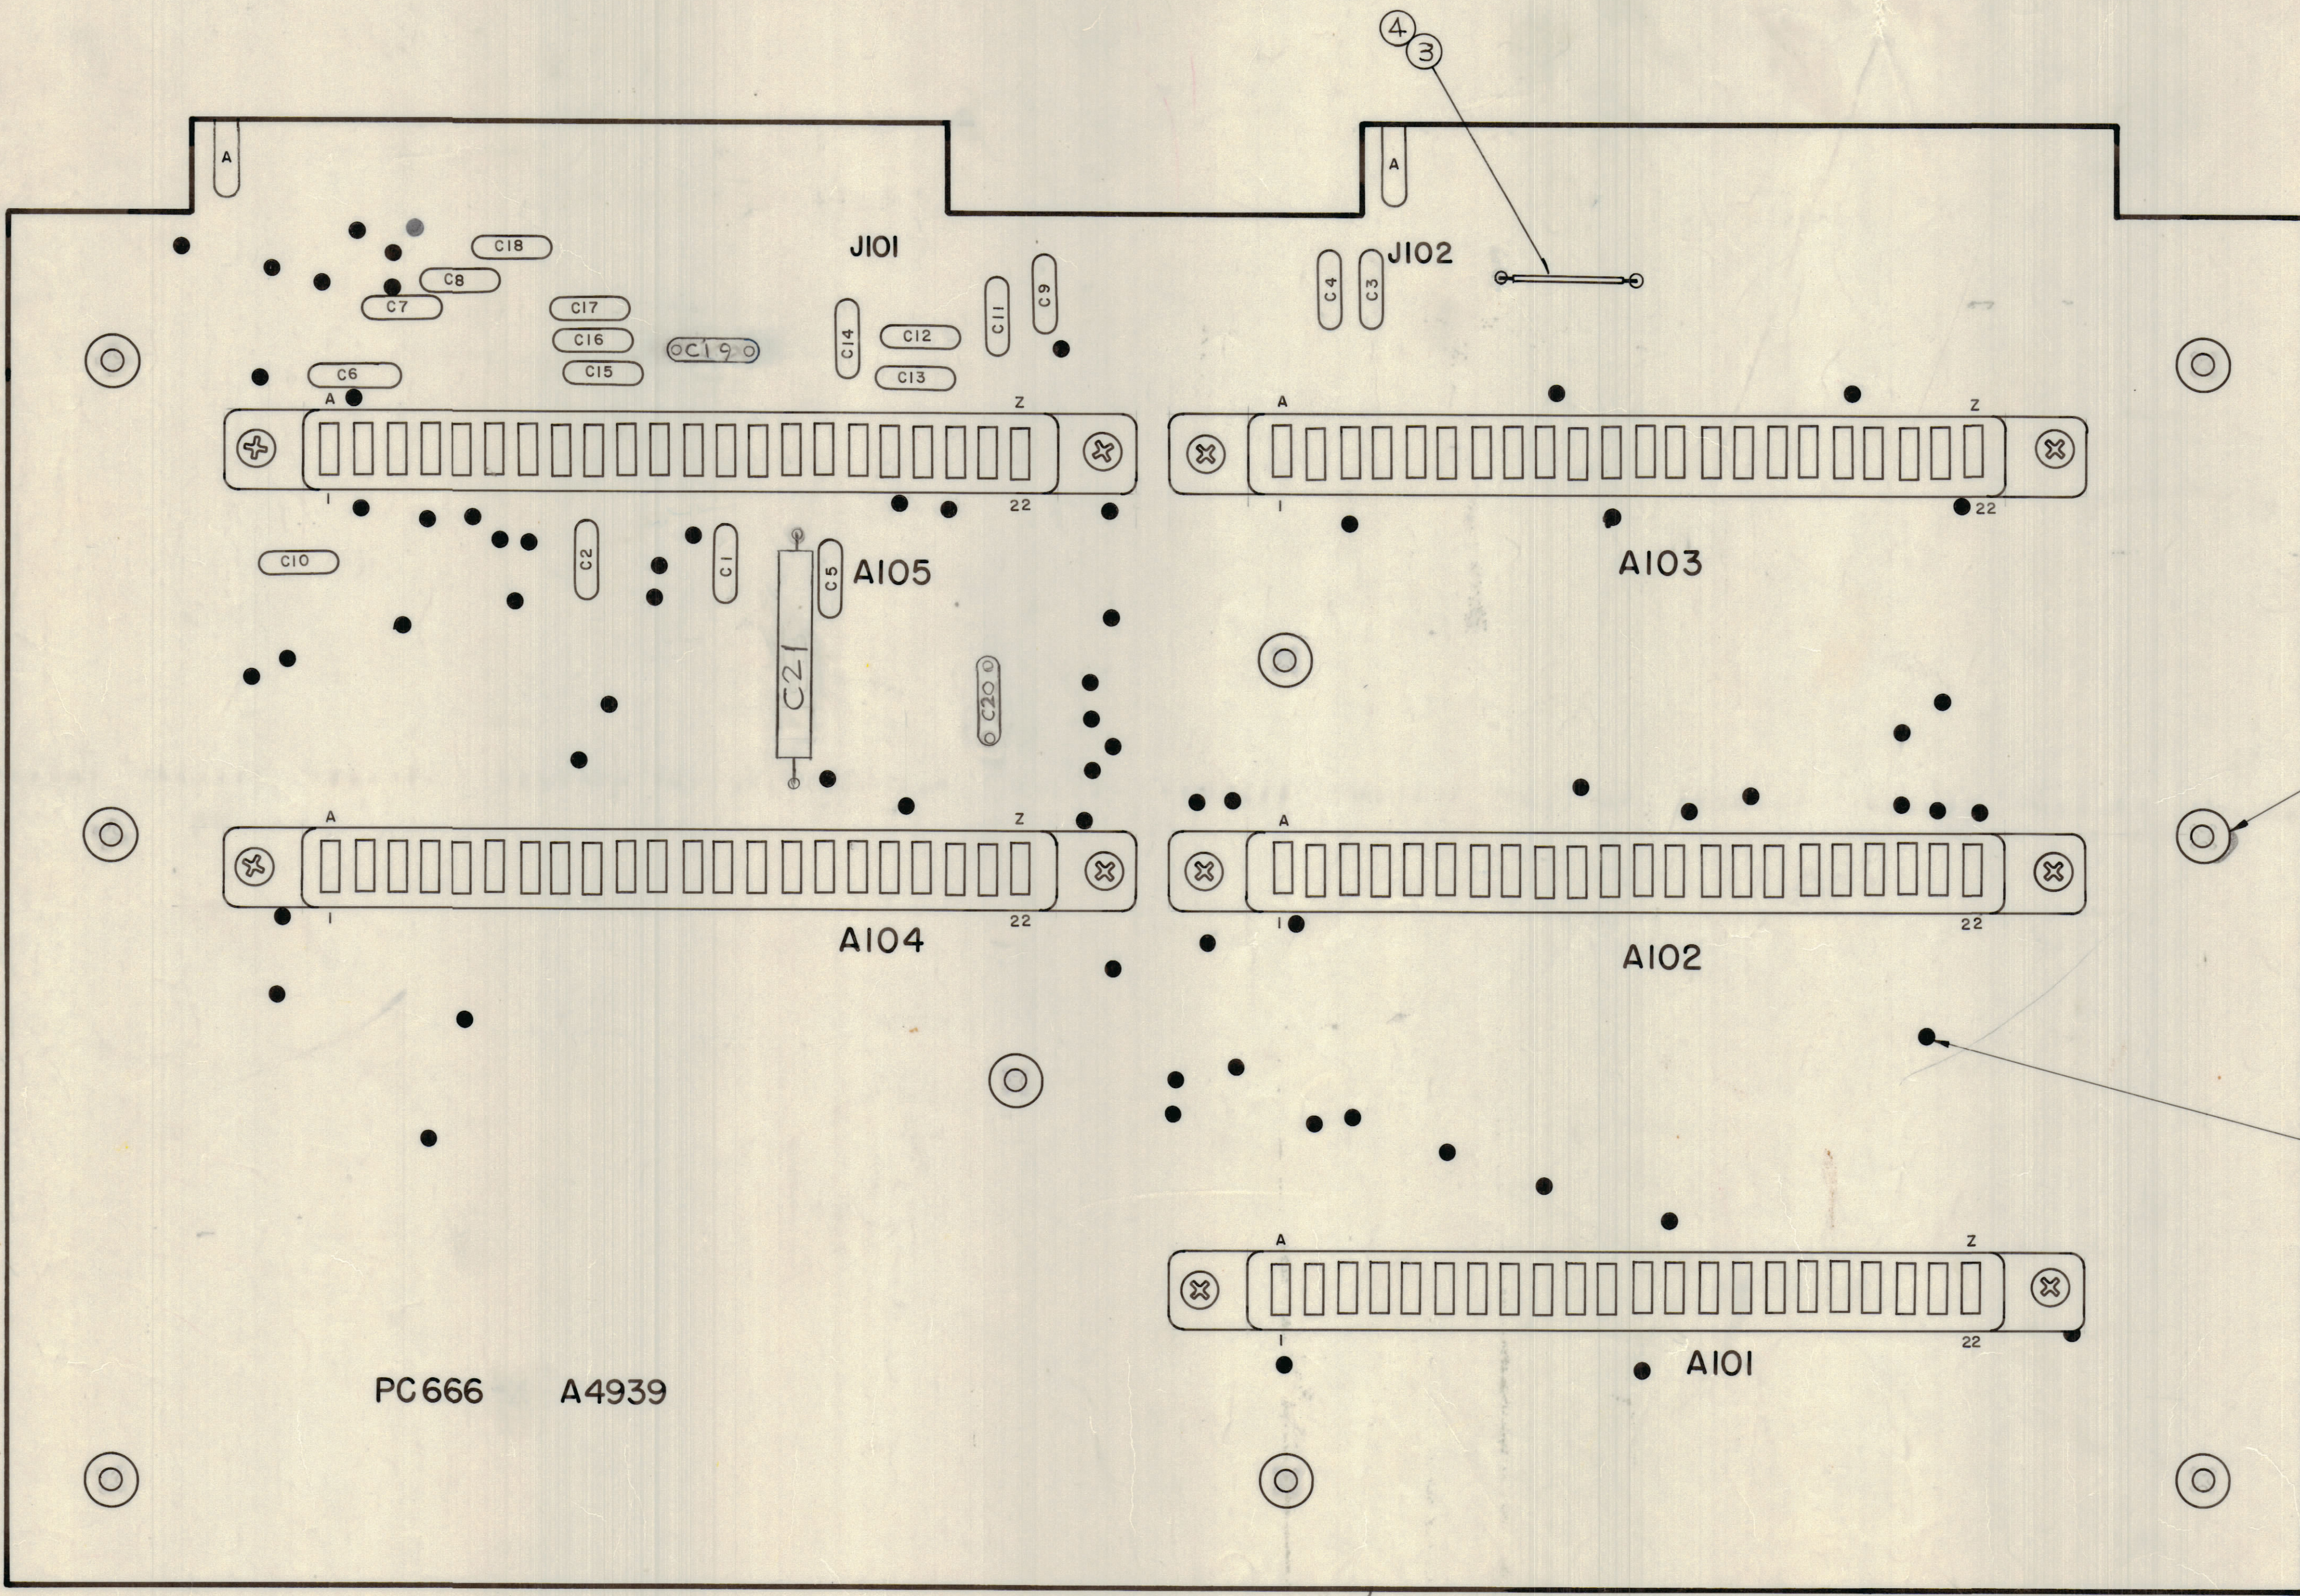

- SOLDER FRONT & REAR TYP 9 PLACES*
- ASSEMBLY NOTES
1. TO MOUNT COMPONENTS INSERT LEADS THROUGH HOLES
 2. CAUTION, WHEN APPLYING HEAT & SOLDER TO LEAD & FOIL.
 3. CLEAN & INSPECT AS PER SPEC 5676.
 4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NDL A4939.
 5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.
- SOLDER FILL*

PC666 A4939

QTY.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
x	4	PX100		INSULATION	
x	3	WL100		BUSS WIRE	
X	2	BS100		SOLDER TIN ALLOY	
1	1	PC666		PRINTED CIRCUIT BOARD	

F. BUDETTI LIST OF MATERIAL			
FINAL APPROVAL	DATE	THE TECHNICAL MATERIEL CORP.	
<i>WB</i>	8/31/73	MAMARONECK, NEW YORK	
MECH. DES.	DATE	ASSY. PRINTED CIRCUIT BD.	
<i>UWP</i>	8-31-73	MOTHER BOARD	
ELECT. DES.	DATE	SIZE	CODE IDENT NO.
		D	82679
CHECKED	DATE	DWG NO.	A4939
<i>UWP</i>	8-31-73		
DRAWN	DATE	ISSUE	B
<i>9E</i>	8/30/73	SCALE	2:1
		SHEET	OF

1 ATSA-3		
QTY / UNIT	MODEL USED ON	ASSY NO.
	APPLICATION	
	CODE	

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.