


4

3

2



1

REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	Ø	ORIGINAL RELEASE FOR PRODUCTION	8/21/73			
	A	Pol. & JUMPERS MODIFIED	12-17-73	21113		EP EP
	B	RI WAS 1.5K 1/4 W.	9-30-76	21427		WJ K.P.
	C	DELETE JUMPERS FROM TERMS 4&10	2-25-77	21504	GDL	KK

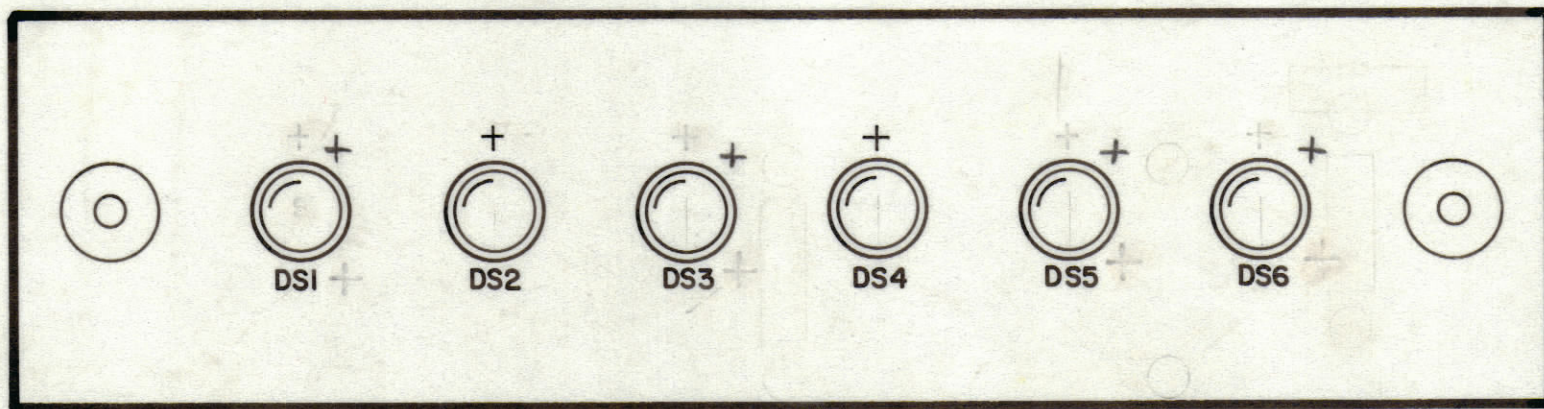

ASSEMBLY NOTES

1. TO MOUNT COMPONENTS INSERT LEADS THROUGH HOLES.
2. CAUTION, WHEN APPLYING HEAT & SOLDER TO LEAD & FOIL.
3. CLEAN & INSPECT AS PER SPEC S 676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A 4945.
5. USE SYMBOL NUMBERS FOR ASSY. REF.

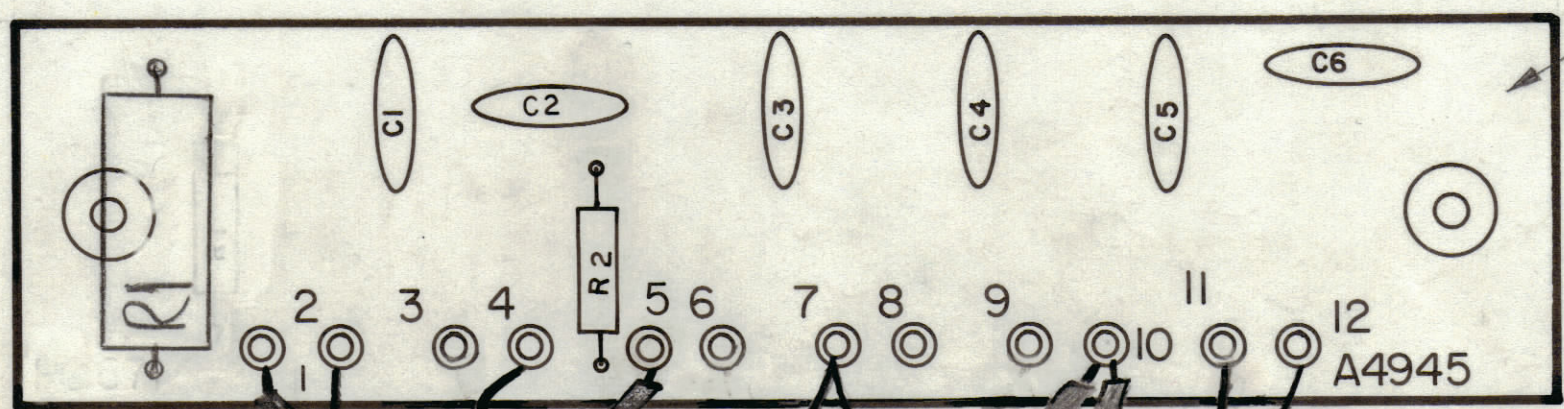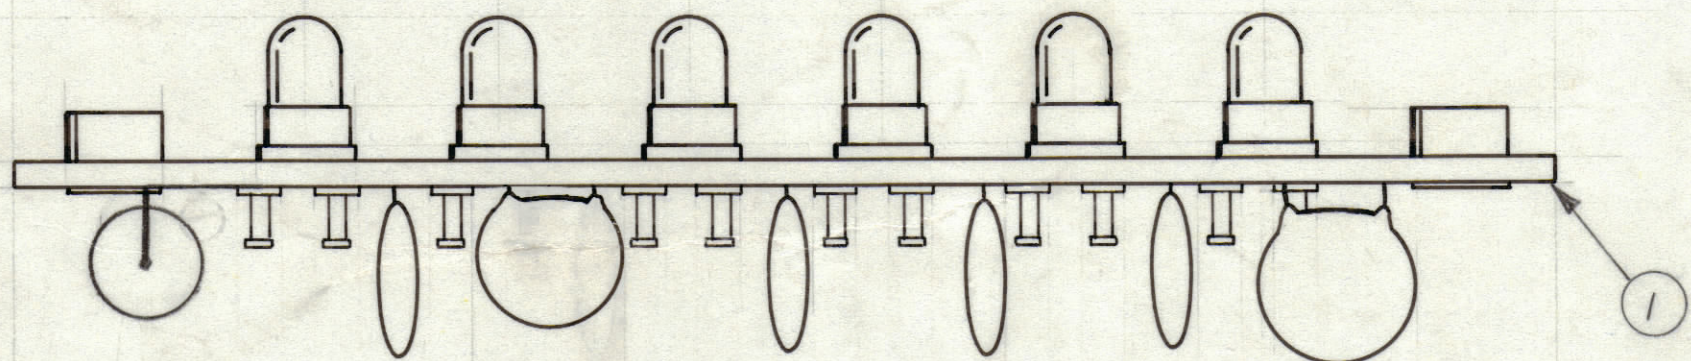

CIRCUIT SIDE

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X 4	PX100		INSULATION SLEEVING, ELEC	
X 3	WL100		WIRE, BUSS, BAR TINNED	
X 2	BS100		SOLDER TIN ALLOY	
1	PC671		PRINTED CIRCUIT BD	

F. BUDETTI LIST OF MATERIAL

FINAL APPROVAL	DATE
MECH. DES.	DATE 8-10-73
ELECT. DES.	DATE
CHECKED	DATE 8-10-73
DRAWN	DATE 8/9/73

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

ASSY. PRINTED CIRCUIT BD.

FUNCTION INDICATORS

1	ATSA-3	AX
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
	CODE	

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON
 DECIMALS .X ± .05
 .XX ± .01
 .XXX ± .005
 FRACTIONS ± 1/64
 ANGLES ± 0° -30'

MATERIAL
FINISH

SIZE	CODE IDENT.NO.	DWG NO.	ISSUE
C	82679	A4945	C
SCALE 2:1			SHEET OF

D

C

B

A

D

C

B

A

C A 4945