REQ. PER UNIT	MODEL	ASSY. NO.	DATE		
3	GPT-40K	AP-102	3/1/60	AC-111	C

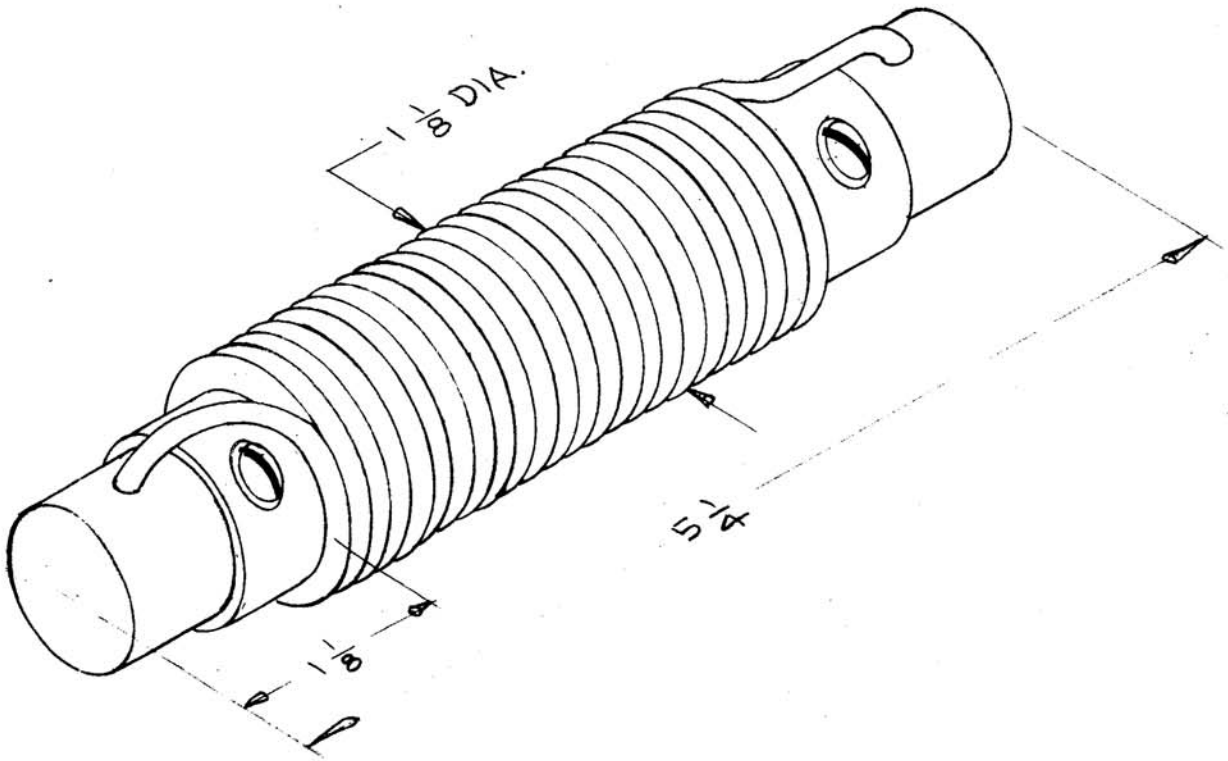

INDUCTANCE = 45 μHY
D.C. RESISTACE = .018 OHMS
CURRENT = N/R
Q = 15 or GREATER
TEST FREQ. = 2.5 MC

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	1	Q & Test Freq Added	6/10/60	2454			
B		45 UHY WAS 40 μh	4-4-60	1997	CY		
A		COMPLETE REDESIGN	2/29/6	*	CY		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ± 1/64

SCALE: 4A-1826

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC. | FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, FIXED
PLUG - IN TYPE

DRAWN	CHECKED	FINAL APPROVAL
CY		

ELEC. DES. APP | MECH. DES. APP

AC-111 C

FORM 108-A