REQ. PER UNIT	USED ON			AC-116	A
	MODEL	ASS'Y. N.	DATE		
1	CMO	AX-224	10-6-1960		

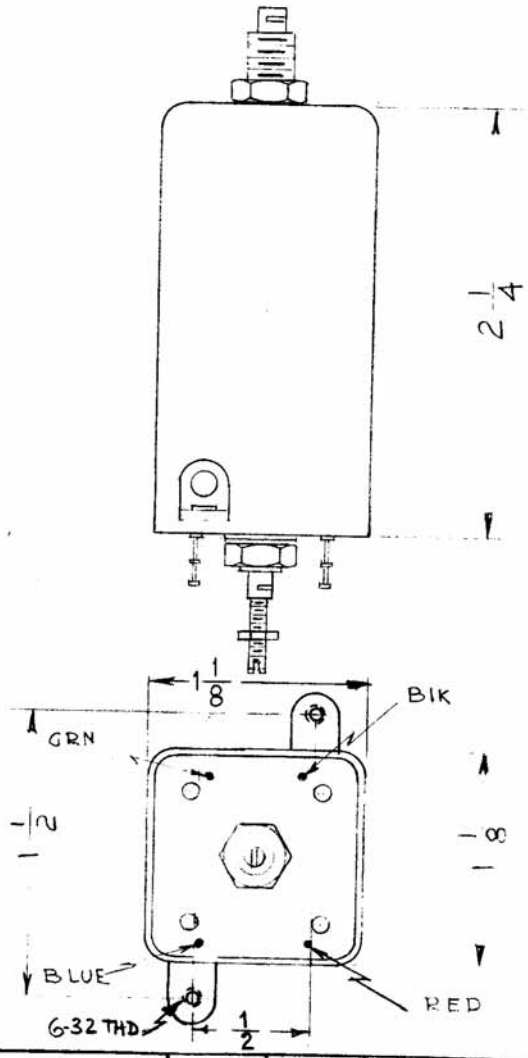

MODEL	REQ	LOCATIONAL FUNCTION	OPER FREQ	SYM
CMO	1	V3DB PLATE CC'L	515KC	T306

L - 230 uh
Q - 85 or Greater
Test Freq - 790KC

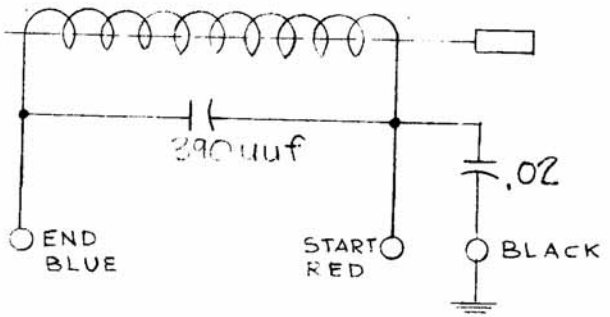

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	CHANGED BRACKET TO AGREE WITH A-1866	4-26-61	4758	WH	JCB	

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 2A-1866

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED

DRAWN	CHECKED	FINAL APPROVAL

ELEC. DES. APP | MECH. DES. APP

AC-116 | A

FORM 108-A