REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	A C 193	Ø
1	VLRB-1	A-3681	3-17-65		





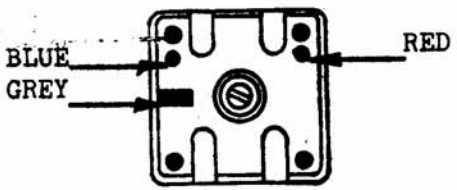

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 790 KCS
PRIMARY: 820 µh +20 µh
SECONDARY: NOT RATED
"Q" (PRIMARY)@ 200 KCS: >65

MECHANICAL SPEC.

TURNS
PRIMARY: 250
SECONDARY: ~~X~~
COLOR CODE: GREY
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	4.7.65	—	JP		
X	EXPER. RELEASE		X	HLB 4/8		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE

CODE A | 2-A-3921

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		—	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE —	COIL, RF, ADJUSTABLE	
		MATERIAL —		

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
—	—	H. AUSTIN	3-29-65	
FINISH & SPEC. NO. —		ELEC. DES. APP.	MECH. DES. APP.	AC 193 Ø

REPROVEL NO. 440H 16104