REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE		
1	VLRB-1	A-3681		AC 195	Ø





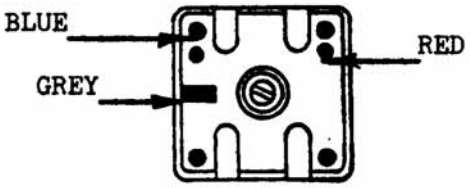

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ .790KC
PRIMARY: 120.4 ± 5μh
SECONDARY: NOT RATED
"Q" (PRIMARY)@ 400KCS >50

MECHANICAL SPEC.

TURNS
PRIMARY: 101
SECONDARY: X
COLOR CODE: GREY
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	5.4.65	Ø			
X	EXPER. RELEASE	3.24.65	X	HLA		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE

CODE A

2-A-3923

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			POSE	

STOCK SIZE —

MATERIAL —

TYPE & TEMPER — HEAT TREAT. SPEC. —

FINISH & SPEC. NO. —

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJUSTABLE

DRAWN	CHECKED	FINAL APPROVAL
H. Austin	5/3/65	5/4/65
ELEC. DES. APP.	MECH. DES. APP.	
		AC 195 Ø