REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	AC201	Ø
2	LFSB-1	A3791	3-17-65		





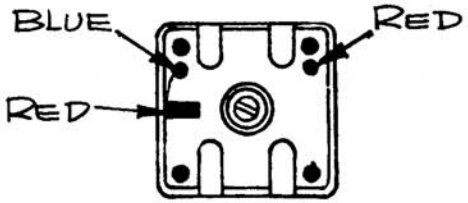

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 2.5 MC
PRIMARY: 27μh ± 1μh
SECONDARY: NOT RATED
"Q" (PRIMARY)@ 1.05 MC : >110

MECHANICAL SPEC.

TURNS
PRIMARY: 49
SECONDARY: (X)
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	4.7.65	Ø	RL		
X	EXPER. RELEASE	3.17.65	X	HCA		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE

CODE A

2-A-3936

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJUSTABLE

STOCK SIZE —

MATERIAL —

TYPE & TEMPER — | HEAT TREAT. SPEC. —

FINISH & SPEC. NO. —

DRAWN	CHECKED	FINAL APPROVAL
H. AUSTIN	3-29-65	

ELECT. DES. APP.	MECH. DES. APP.	AC201	Ø

TMC FORM 103-A

REPROVEL NO. 440H 16106