REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	AC 204	Ø
1	LFSB-1	A 3791	3-17-65		





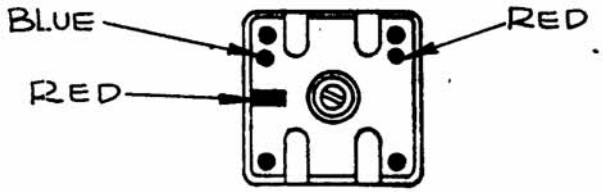

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MCS
PRIMARY: 6.8μh ± .2μh
SECONDARY: NOT RATED
"Q" (PRIMARY)@ 5.25 MCS: > 128

MECHANICAL SPEC.

TURNS
PRIMARY: 24
SECONDARY: ~~44~~
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	4.7.65	Ø	JL		
X	EXPER. RELEASE	3.17.65	X	HLA		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

2-A-3939

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE —

MATERIAL —

TYPE & TEMPER — HEAT TREAT. SPEC. —

FINISH & SPEC. NO. —

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJUSTABLE

DRAWN	CHECKED	FINAL APPROVAL
H. AUSTIN.	3-29-65	
ELEC. DES. APP.	MECH. DES. APP.	
RAB		

AC 204 Ø