REQ. PER UNIT	USED ON			AC 215
	MODEL	ASS'Y. NO.	DATE	
1	CDN-3	A 4352	2/10/66	

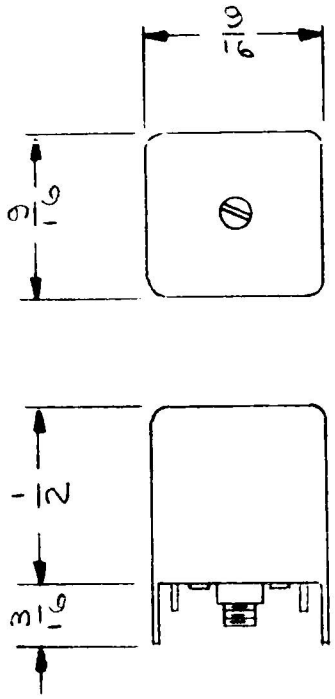

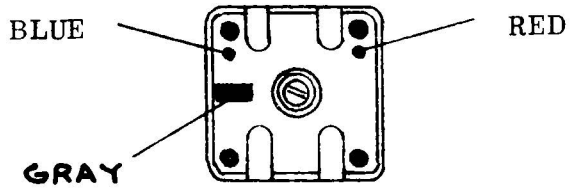

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY: 355 KHZ
INDUCTANCE @ 2.5 MHZ
PRIMARY: 73 UH + AND -5UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 355 KHZ: > 70

MECHANICAL SPEC.

TURNS
PRIMARY: 72
SECONDARY: NA
COLOR CODE: GRAY
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWERED IRON

SCHEMATIC



SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	ORIGINAL RELEASE PRODUCTION					

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

DECIMALS .X ±.05 .XX ±.01 .XXX ±.005 TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

2A4424

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			POSE	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJUSTABLE

DRAWN	CHECKED	FINAL APPROVAL
J.L.		

ELEC. DES. APP.	MECH. DES. APP.	
		AC 215

TMC FORM 106-A

REPROVEL NO. 440H

23645