REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	AC 216
1	CDN-3	A 4349	2/10/66	





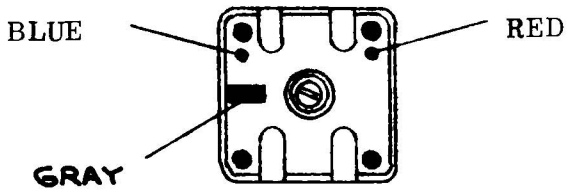

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY: 455 KHZ
INDUCTANCE @ 2.5 MHZ
PRIMARY: 31 UH+ξ-10 UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 455 KHZ : >60

MECHANICAL SPEC.

TURNS
PRIMARY: 50
SECONDARY: NA
COLOR CODE: GRAY
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWERED IRON

SCHEMATIC



SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	PRODUCTION					

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

DECIMALS .X ±.05 .XX ±.01 .XXX ±.005 TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

2A4425

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			POSE	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJUSTABLE

DRAWN	CHECKED	FINAL APPROVAL
J.L.	DK	

ELEC. DES. APP.	MECH. DES. APP.	AC 216

TMC FORM 106-A

REPROVEL NO. 440H