REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	AC 217
1	CDN-3	A 4351	2/10/66	

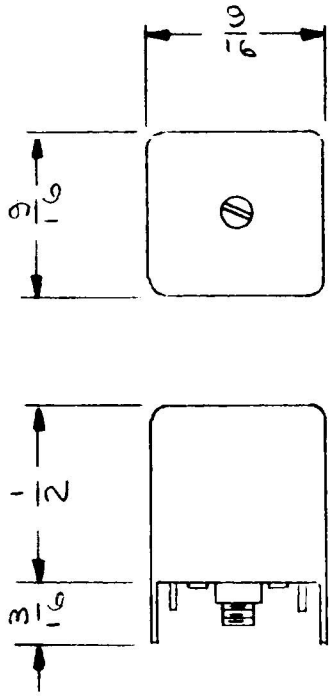

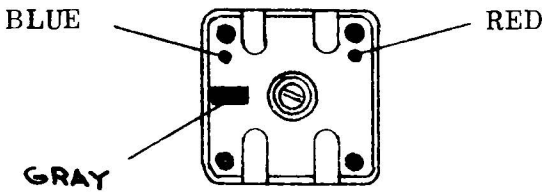

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY: 455 KHZ
INDUCTANCE @ 2.5 MHZ
PRIMARY: 38 UH ± 5 UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 455 KHZ: > 65

MECHANICAL SPEC.

TURNS
PRIMARY: 54
SECONDARY: NA
COLOR CODE: GRAY
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWERED IRON

SCHEMATIC



SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
D	PRODUCTION	2-10-66	E	AH		AHe

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005
TOLERANCES
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

2A4426

REQ.	ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJUSTABLE

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

DRAWN	CHECKED	FINAL APPROVAL
J.L.	JCB	
ELEC. DES. APP.	MECH. DES. APP.	AC 217
JOB		

TMC FORM 106-A

REPROVEL NO. 440H 23648