


AM-114

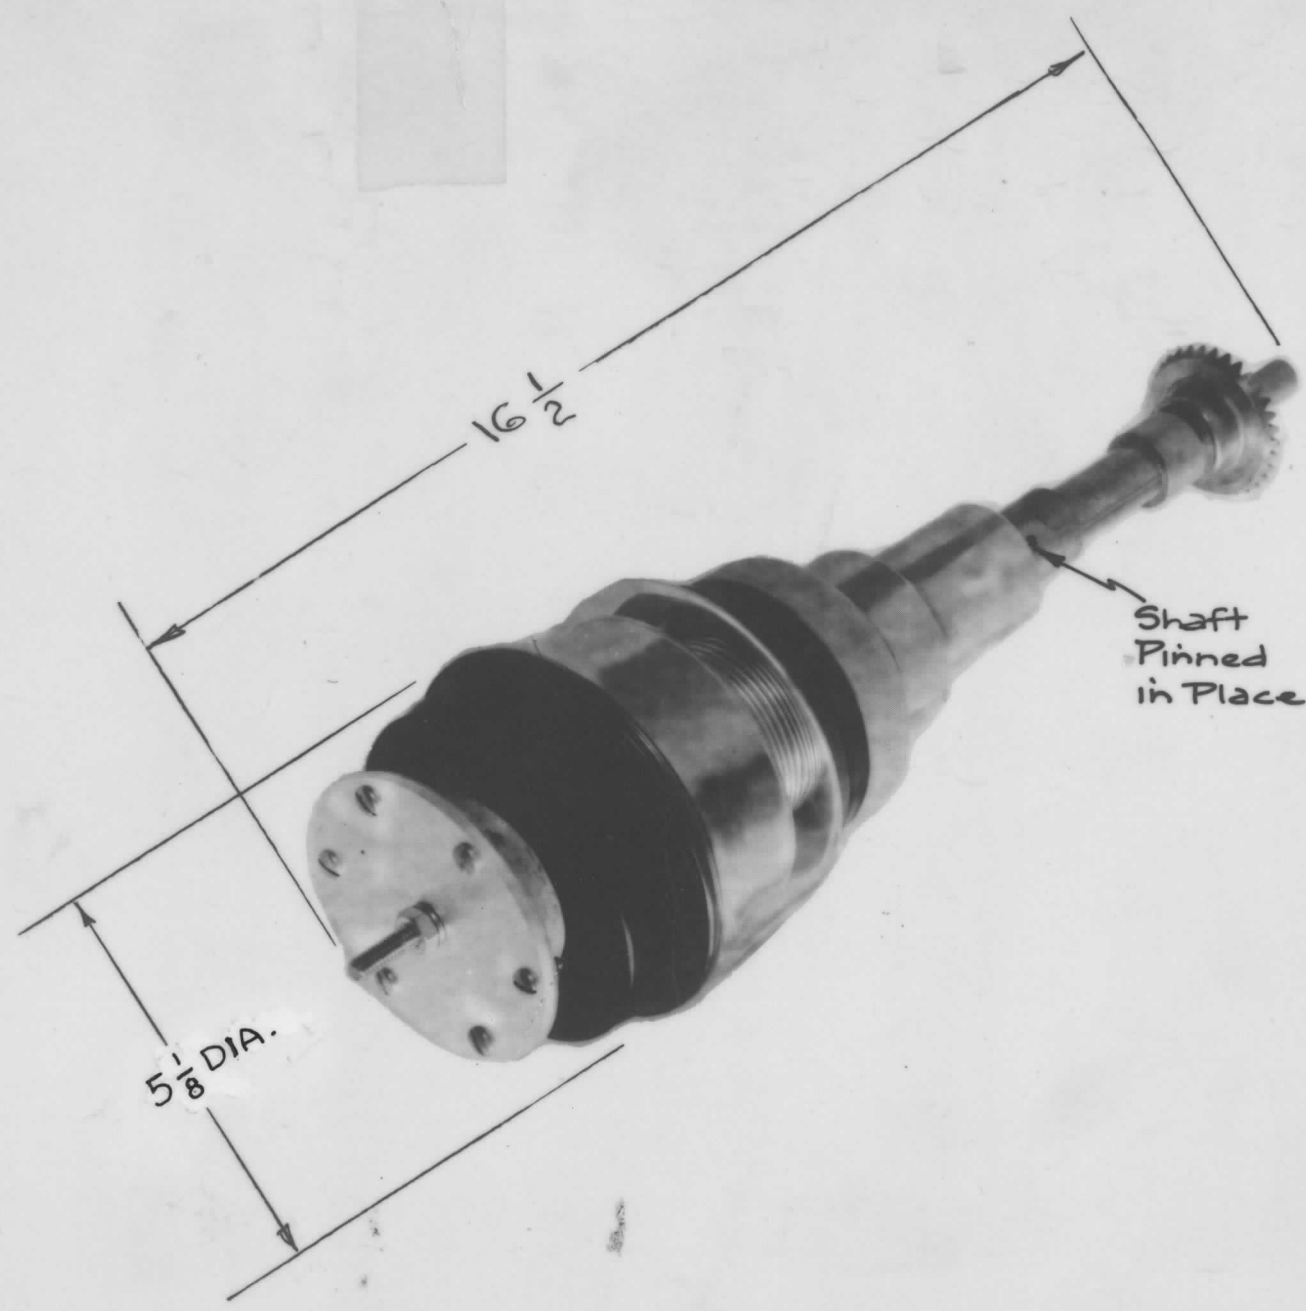

ELECTRICAL SPECIFICATIONS:

50-2000
 10 Kilo volts (Peak)
 Current Rating - 45 Amps RMS

CAPACITOR, variable vacuum:
 with/shaft and bevel gear

NOTICE TO USER'S RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims property right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE:	NPL 2A-A-1947			
DEC. DIM. \pm FRAC. DIM. \pm ANGULAR DIM. \pm							
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES							

1	GPT-10K	(2MC)	C928	8-23-60
REQ. PER UNIT	MODEL	PROJECT NO.	SYM. NO.	DATE
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
MATERIAL		CAPACITOR, ASS'Y, VARIABLE VACUUM, W/GEAR (PA LOAD)	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.

AM-114