B

AR-102

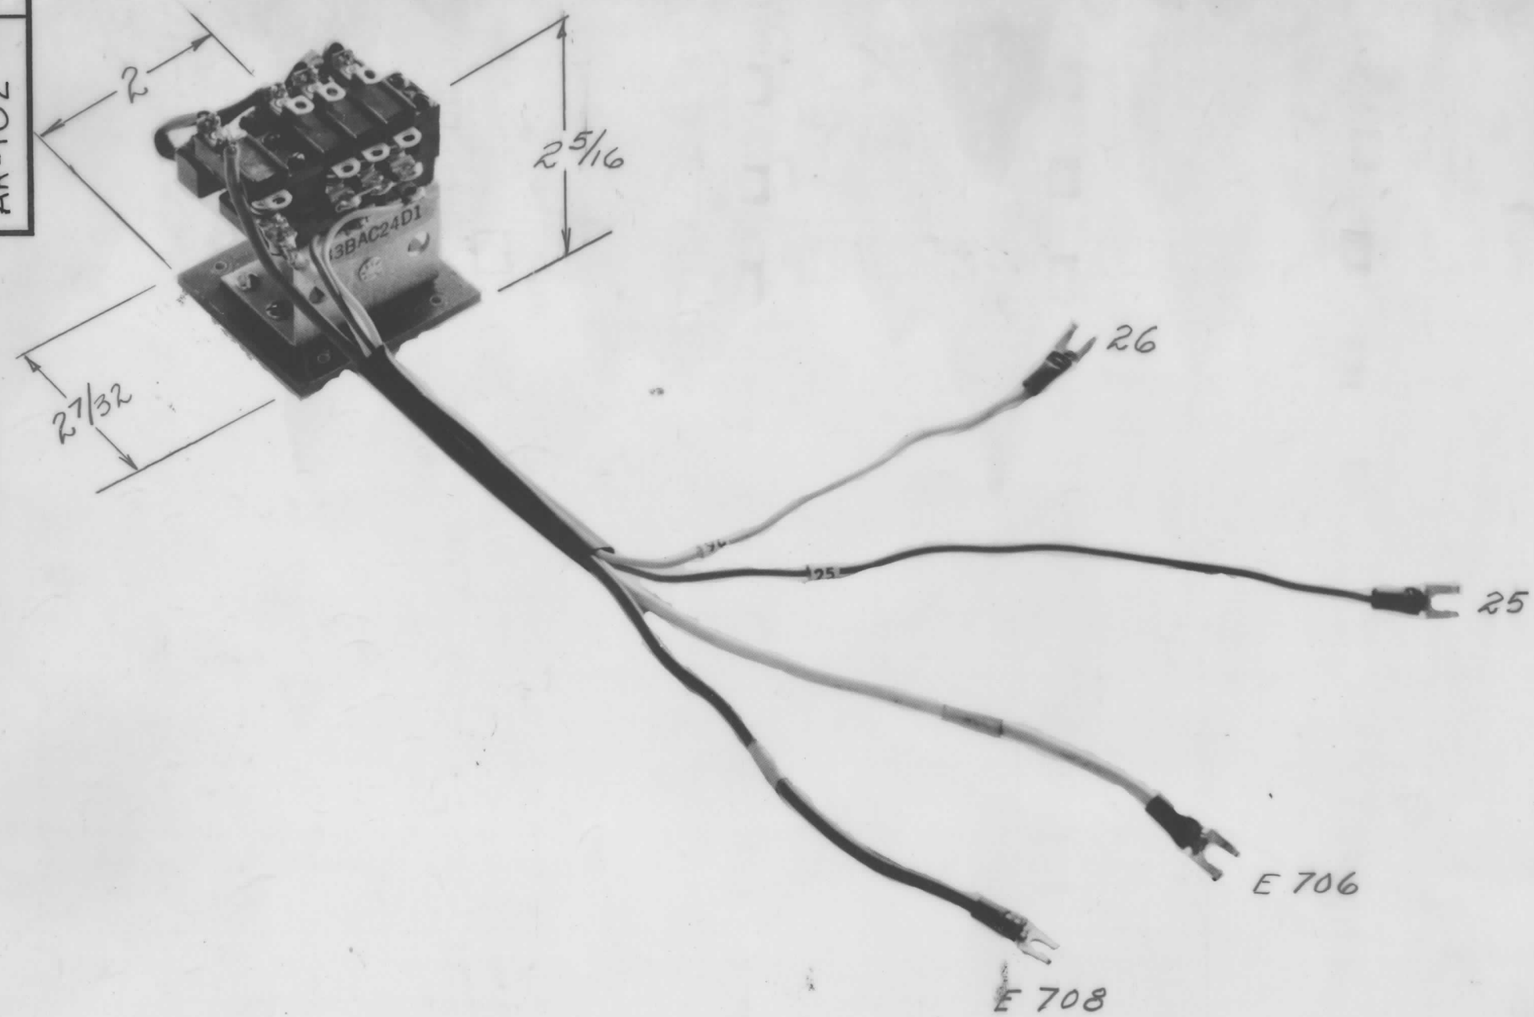

ELECTRICAL SPECIFICATIONS:

COIL	1150 ohms 10% Moisture resistant varnished
PILE UP	4 Form C (4 P.D.T.)
CONTACTS	Code 15 1/4" silver cadium Rated 25 amperes
ADJUSTMENT	Operate 220 V, 50/60 cycle AC

MOUNTING DATA-
FOUR 9/64 DIA. HOLES ON 7/8 X 3/8
MOUNTING CENTERS.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		COIL RES WAS 1800Ω	6-23-66	16427			
A	1	CLERICAL CHANGE	9.2.64				

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
1	GPT-10K	AR-161	A-1669	8-24-64

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

PA SCREEN ON-OFF RELAY ASS'Y.

DRAWN AGC | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

AR 102 B