NOTE;
PHISICAL APPEARANCE OF RELAIS WILL VARY DEPENDING OF VENDORS CONFIGURATION. IN ALL CAS'ES ASSY WILL BE ELECTRICALY & MECHANICALY INTERCHANGEABLE

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	AR-117	C
1	6PT-40K	AR-116	2-26-60		

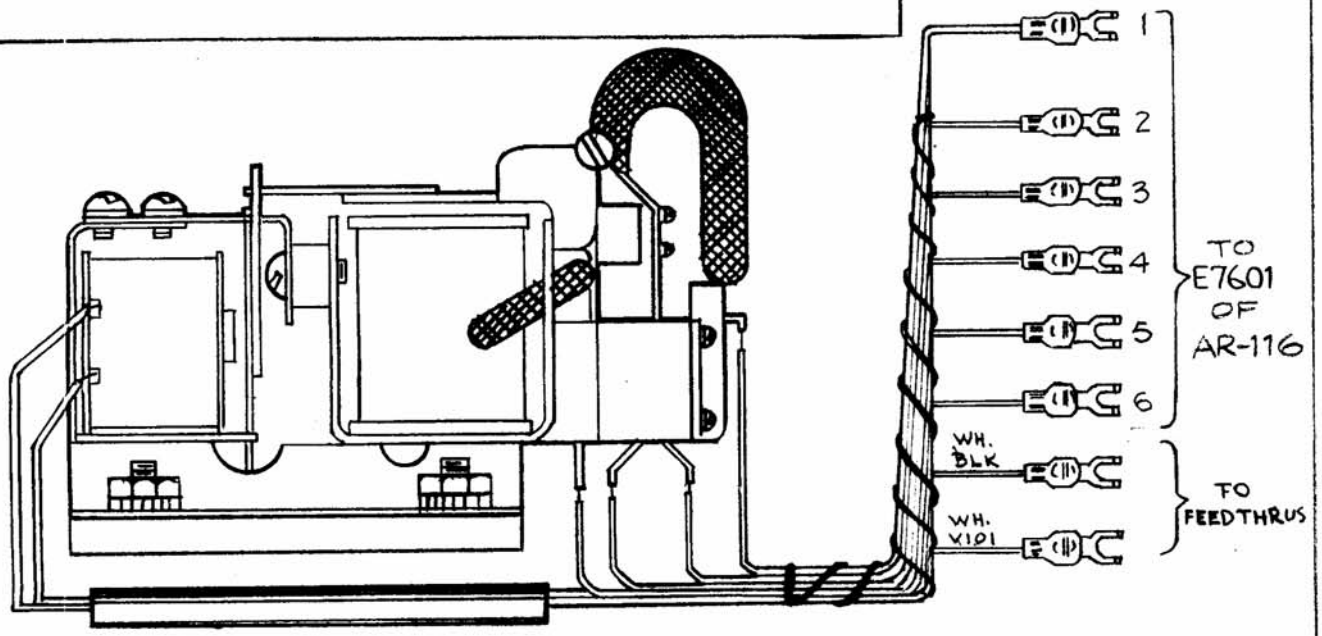

LATCH TYPE

CONTACT ARRANGEMENT– 4C (4.P.D.T.)

CONTACTS SILVER CADIUM

MOISTURE RESISTANT VARNISH ON COILS.

Overall Dimension of Relay less Cable – 3.8125 lg. × 2.219 w. × 2.4375.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C		NOTE ADDED	3-7-91		GDL		
B	4	SEE EMN #10873	2-12-64	10873	AM	TR	
A	1	Nos 7 & 8 Deleted	6/15/60	2484	Cy	JCh	DDB

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

PLATE OVLD RELAY ASSEMBLY
RELAY SOLENOID

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 2A-1829

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE
MATERIAL
TYPE & TEMPER | HEAT TREAT. SPEC.
FINISH & SPEC. NO.

DRAWN	CHECKED	FINAL APPROVAL
DDM	JWB	DDB
ELEC. DES. APP	MECH. DES. APP	AR-117 C
GM		

FORM 106-A