REQ. PER UNIT	USED ON			AR-122
	M DEL	ASS'Y. NO.	DATE	
1	GPT-40K	AR-116	4-11-60	

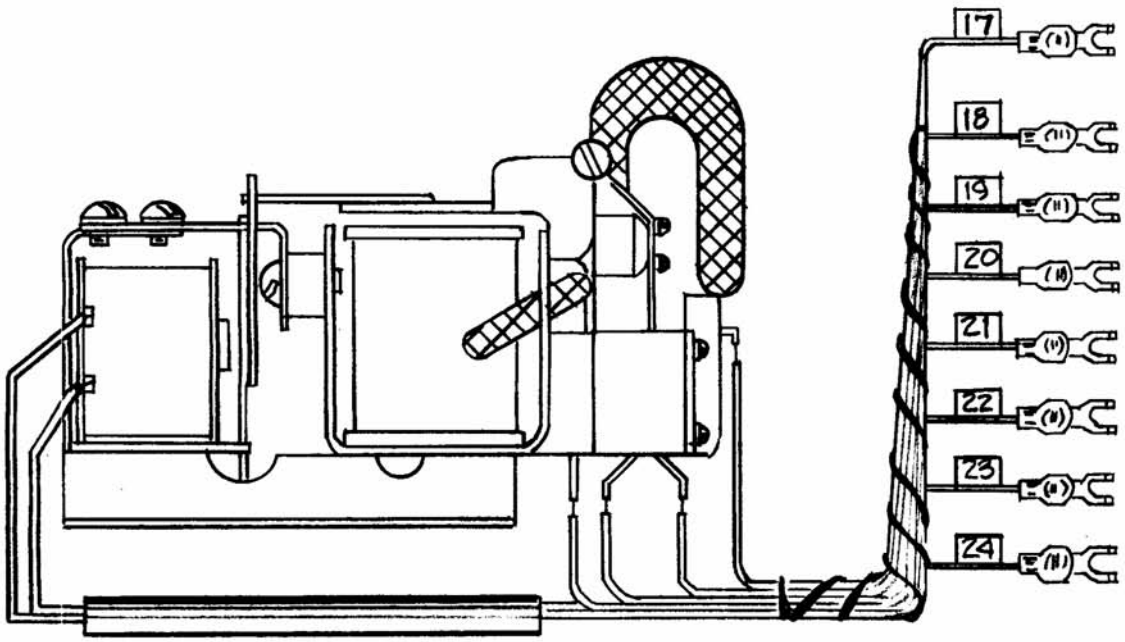

LATCH TYPE

CONTACT ARRANGEMENT-
4C (4.P.D.T.)

CONTACTS SILVER CADIUM

MOISTURE RESISTANT
VARNISH ON COILS.

Mounting - 1 1/4 x 1 1/2, 4 - 5/32 D. Holes
Overall Dims of Relay less
Cable - 3.8125 lg. x 2.219w x 2.4375.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 2A-1831

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

RETUNE RELAY ASSEMBLY

DRAWN	CHECKED	FINAL APPROVAL
DJ Mar	[signature]	[signature]
ELEC. DES. APP	MECH. DES. APP	AR-122

FORM 108-A