


AR-125

REQ. PER UNIT	1
MODEL	GPT-40K
ASBY. NO.	AR-116
DATE	2-26-60

To E7605 of AR-116 To E7606 of AR-116

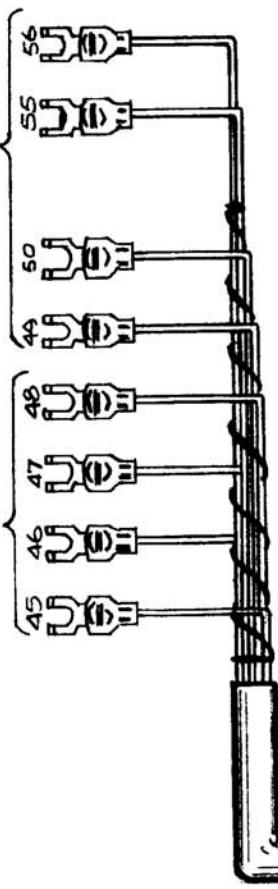

Overall Dims. of Relay less Cable 2 x 1.250 x 2.3125

NON-LATCH TYPE  
 CONTACT ARRANGEMENT-4C (4 P.D.T.)  
 CONTACTS SILVER CADMIUM  
 MOISTURE RESISTANT VARNISH ON COIL.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		FINAL FILAMENT RELAY ASSY (RELAY SOLENOID)	
		<i>Donovan</i>	<i>DOB</i>
		DRAWN	FINAL APPR VAL
		CHECKED	AR-125
		ELEC. DES. APP	MECH. DES. APP
ISSUE ITEM	CHANGED FROM	DATE	CH. NO.
TOLERANCES			
SCALE: 2A-1835			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			
DEC. DIM. ±			
FRAC. DIM. ±			
ANGULAR DIM. ±			