REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE		
2	APP-5		3-3-61	AR-134	B

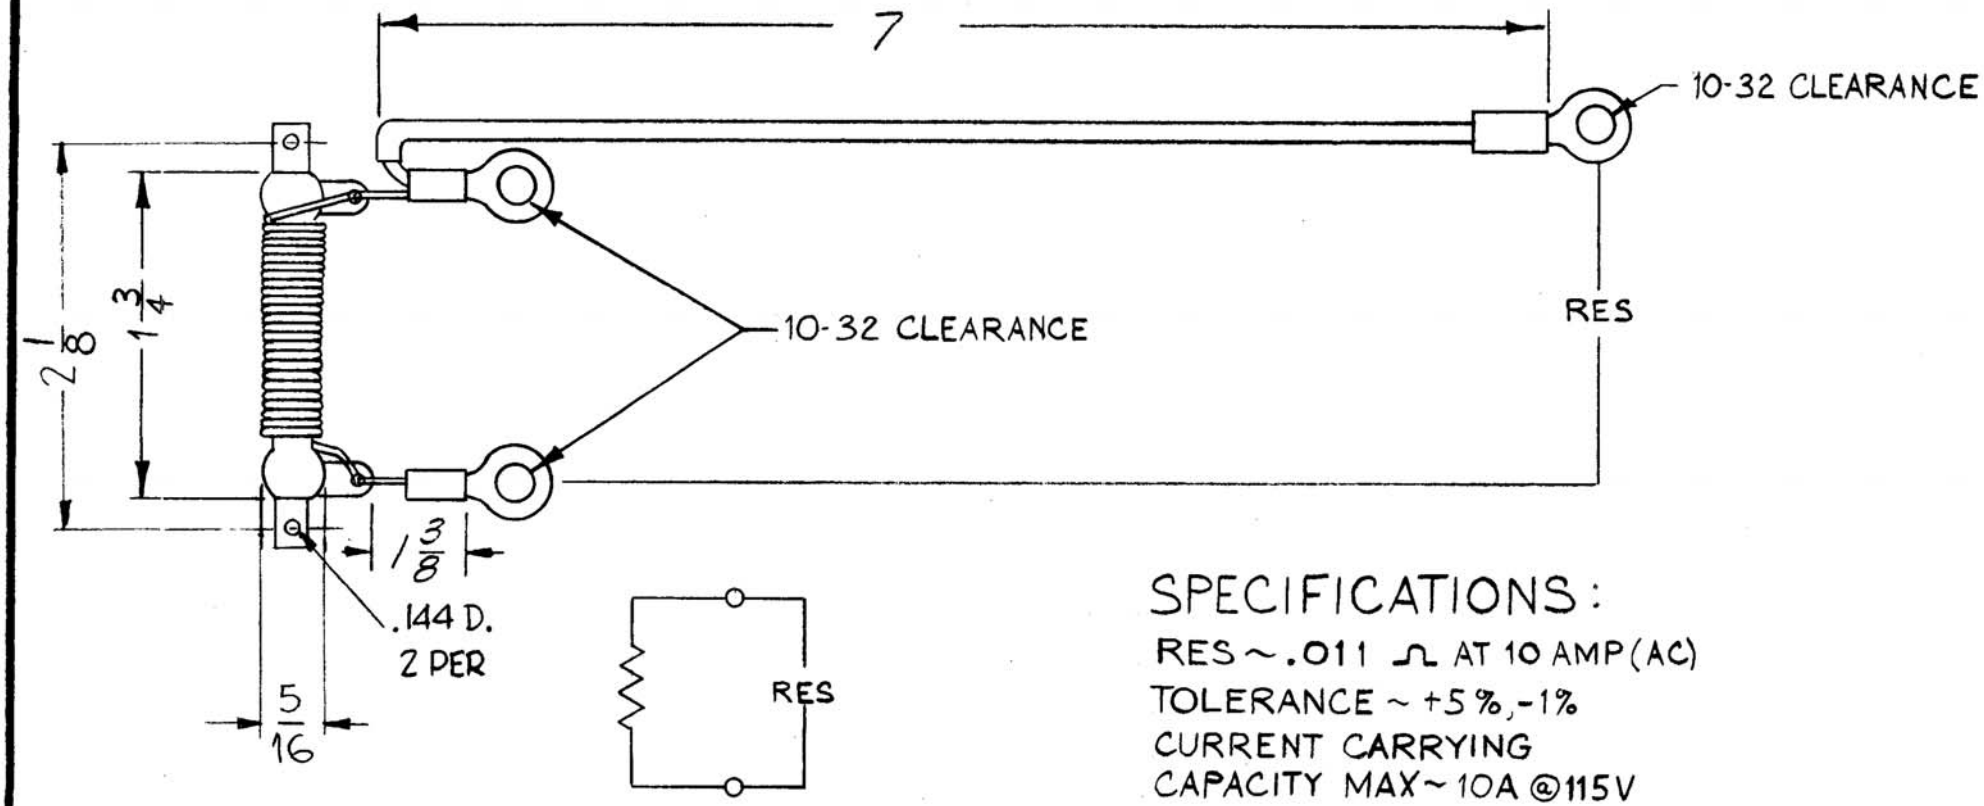

SPECIFICATIONS:

RES ~ .011 Ω AT 10 AMP (AC)
TOLERANCE ~ +5%, -1%
CURRENT CARRYING
CAPACITY MAX ~ 10A @ 115V

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		DIM 7 WAS 6 1/2 ADD 1 3/8 DIM	1/5/71	20188	GE	CU	[illegible]
A	2	Added Mtg BKT DIM. 2 1/8	3/14/6.	4426	DM	gcb	RK
	1	Added Mtg. BRACKETS					

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 2A-2067

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

SHUNT POWER INPUT

DRAWN	CHECKED	FINAL APPROVAL
W.A.F.	[illegible]	Ron Kohl
RK		AR-134 B

ELEC. DES. APP | MECH. DES. APP

FORM 108-A