


FRONT & REAR SECTIONS VIEWED FROM FRONT OR KNOB END OF SWITCH IN EXTREME COUNTER CLOCKWISE POSITION

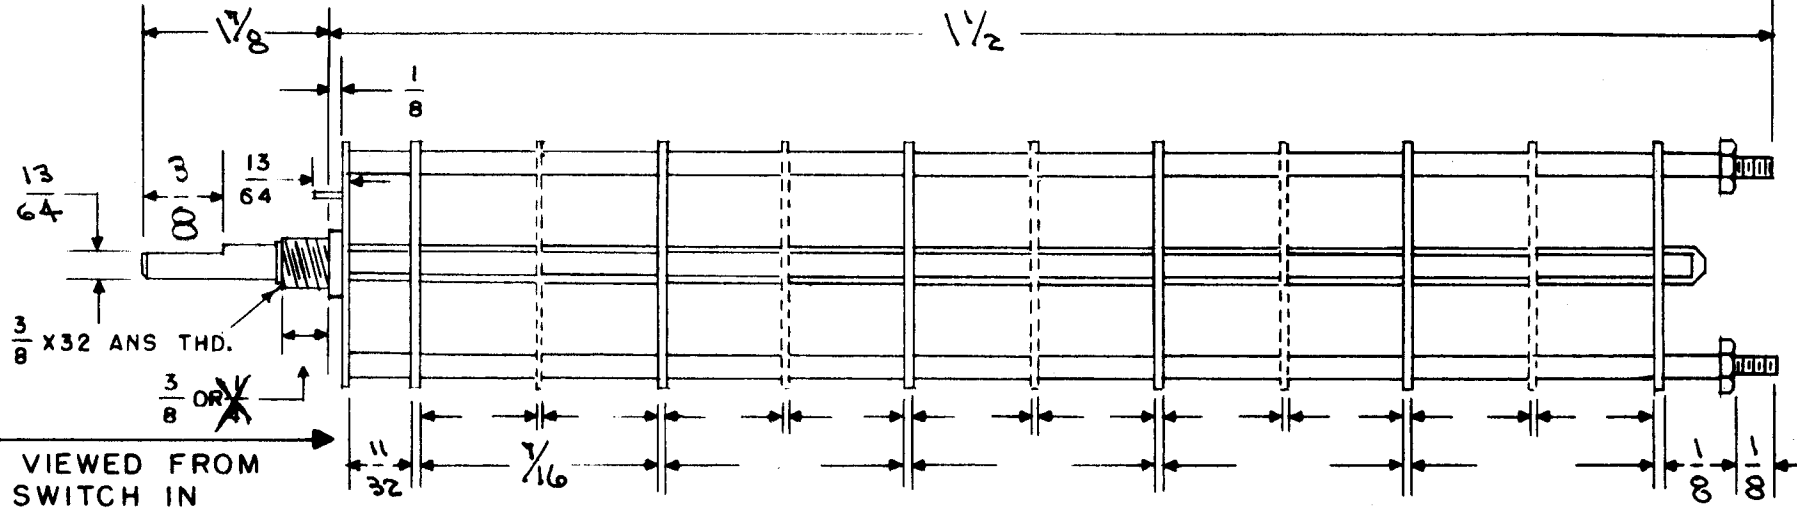

DRAW IN FLAT ON ABOVE SHAFT IN EXTREME COUNTER CLOCKWISE POSITION AND SHOW ANGLE IN REFERENCE TO LINE A-A

NUMBER OF SECTIONS 2  
 NUMBER OF POSITIONS 4  
 ANGLE OF THROW 60° (30° OR 60°)

PART NUMBER \_\_\_\_\_  
 STAMP ON FRONT PLATE YES \_\_\_ NO \_\_\_


CONTACTS & ROTORS: (IF NOT SPECIFIED, SHORTING TYPE WILL BE SUPPLIED)  
 SHORTING \_\_\_ NON SHORTING

MATERIAL: (IF NOT SPECIFIED, SILVER PLATED BRASS WILL BE SUPPLIED)  
 SILVER PLATED BRASS  SILVER ALLOY \_\_\_


INSULATION: BAKELITE \_\_\_ CERAMIC   
 SPECIFY IMPREGNATION IF REQUIRED \_\_\_\_\_

FINISH REQUIREMENTS: COMMERCIAL  ARMY \_\_\_ NAVY \_\_\_  
 SALT TEST (IF ANY GIVE DETAILS) \_\_\_\_\_

HARDWARE: SUPPLY  
 \_\_\_ 3/8 - 32 NUTS \_\_\_ ACROS FLATS MAT. \_\_\_ PLATING \_\_\_  
 \_\_\_ 3/8 INT TOOTH LOCKWASHERS MAT. \_\_\_ PLATING \_\_\_

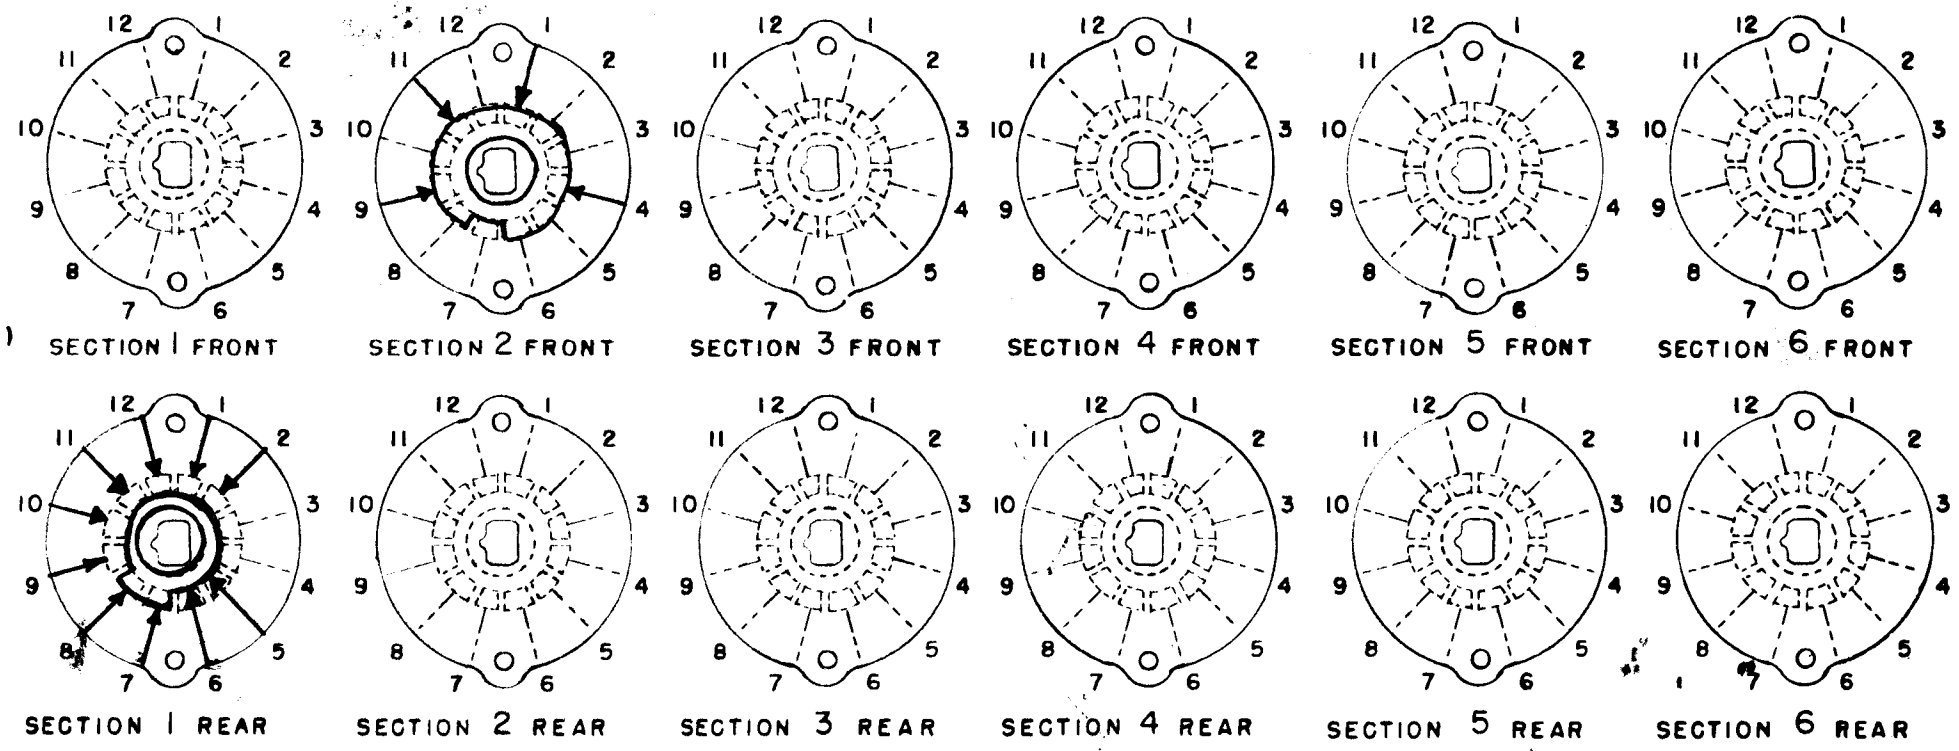

SYMBOLS USED IN MARKING PRINT →

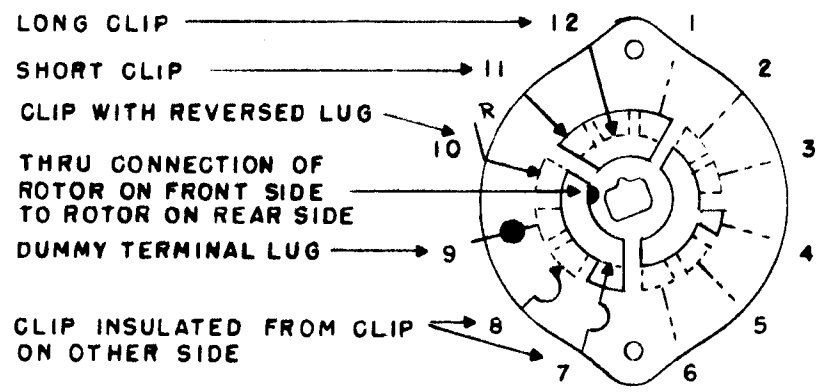

OUTLINE ROTOR BLADES AS SHOWN ABOVE WITH SWITCH IN EXTREME COUNTER-CLOCKWISE POSITION

SWITCH  
 TYPE - H HC DH DHC QA  
 QDH QHC QDHC  
 (CIRCLE DESIRED TYPE)

A	SEE SHEET 1	3-29-67	18056	L.A.K.	<i>[Signature]</i>	<i>[Signature]</i>	
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE: 1/8" = 1"					

DEC. DIM. ±  
 FRAC. DIM. ±  
 ANGULAR DIM. ±

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		SWITCH ASSY., Rotary (S202)	
		C.D.D.	<i>[Signature]</i>
		TYPE & TEMPER	HEAT TREAT. SPEC.
		DRAWN	CHECKED
			FINAL APPROVAL
			AS-105
			Page 2 of 2