


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
A.	1	NR493 WAS NR136	3-23-64	11104	AM.		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

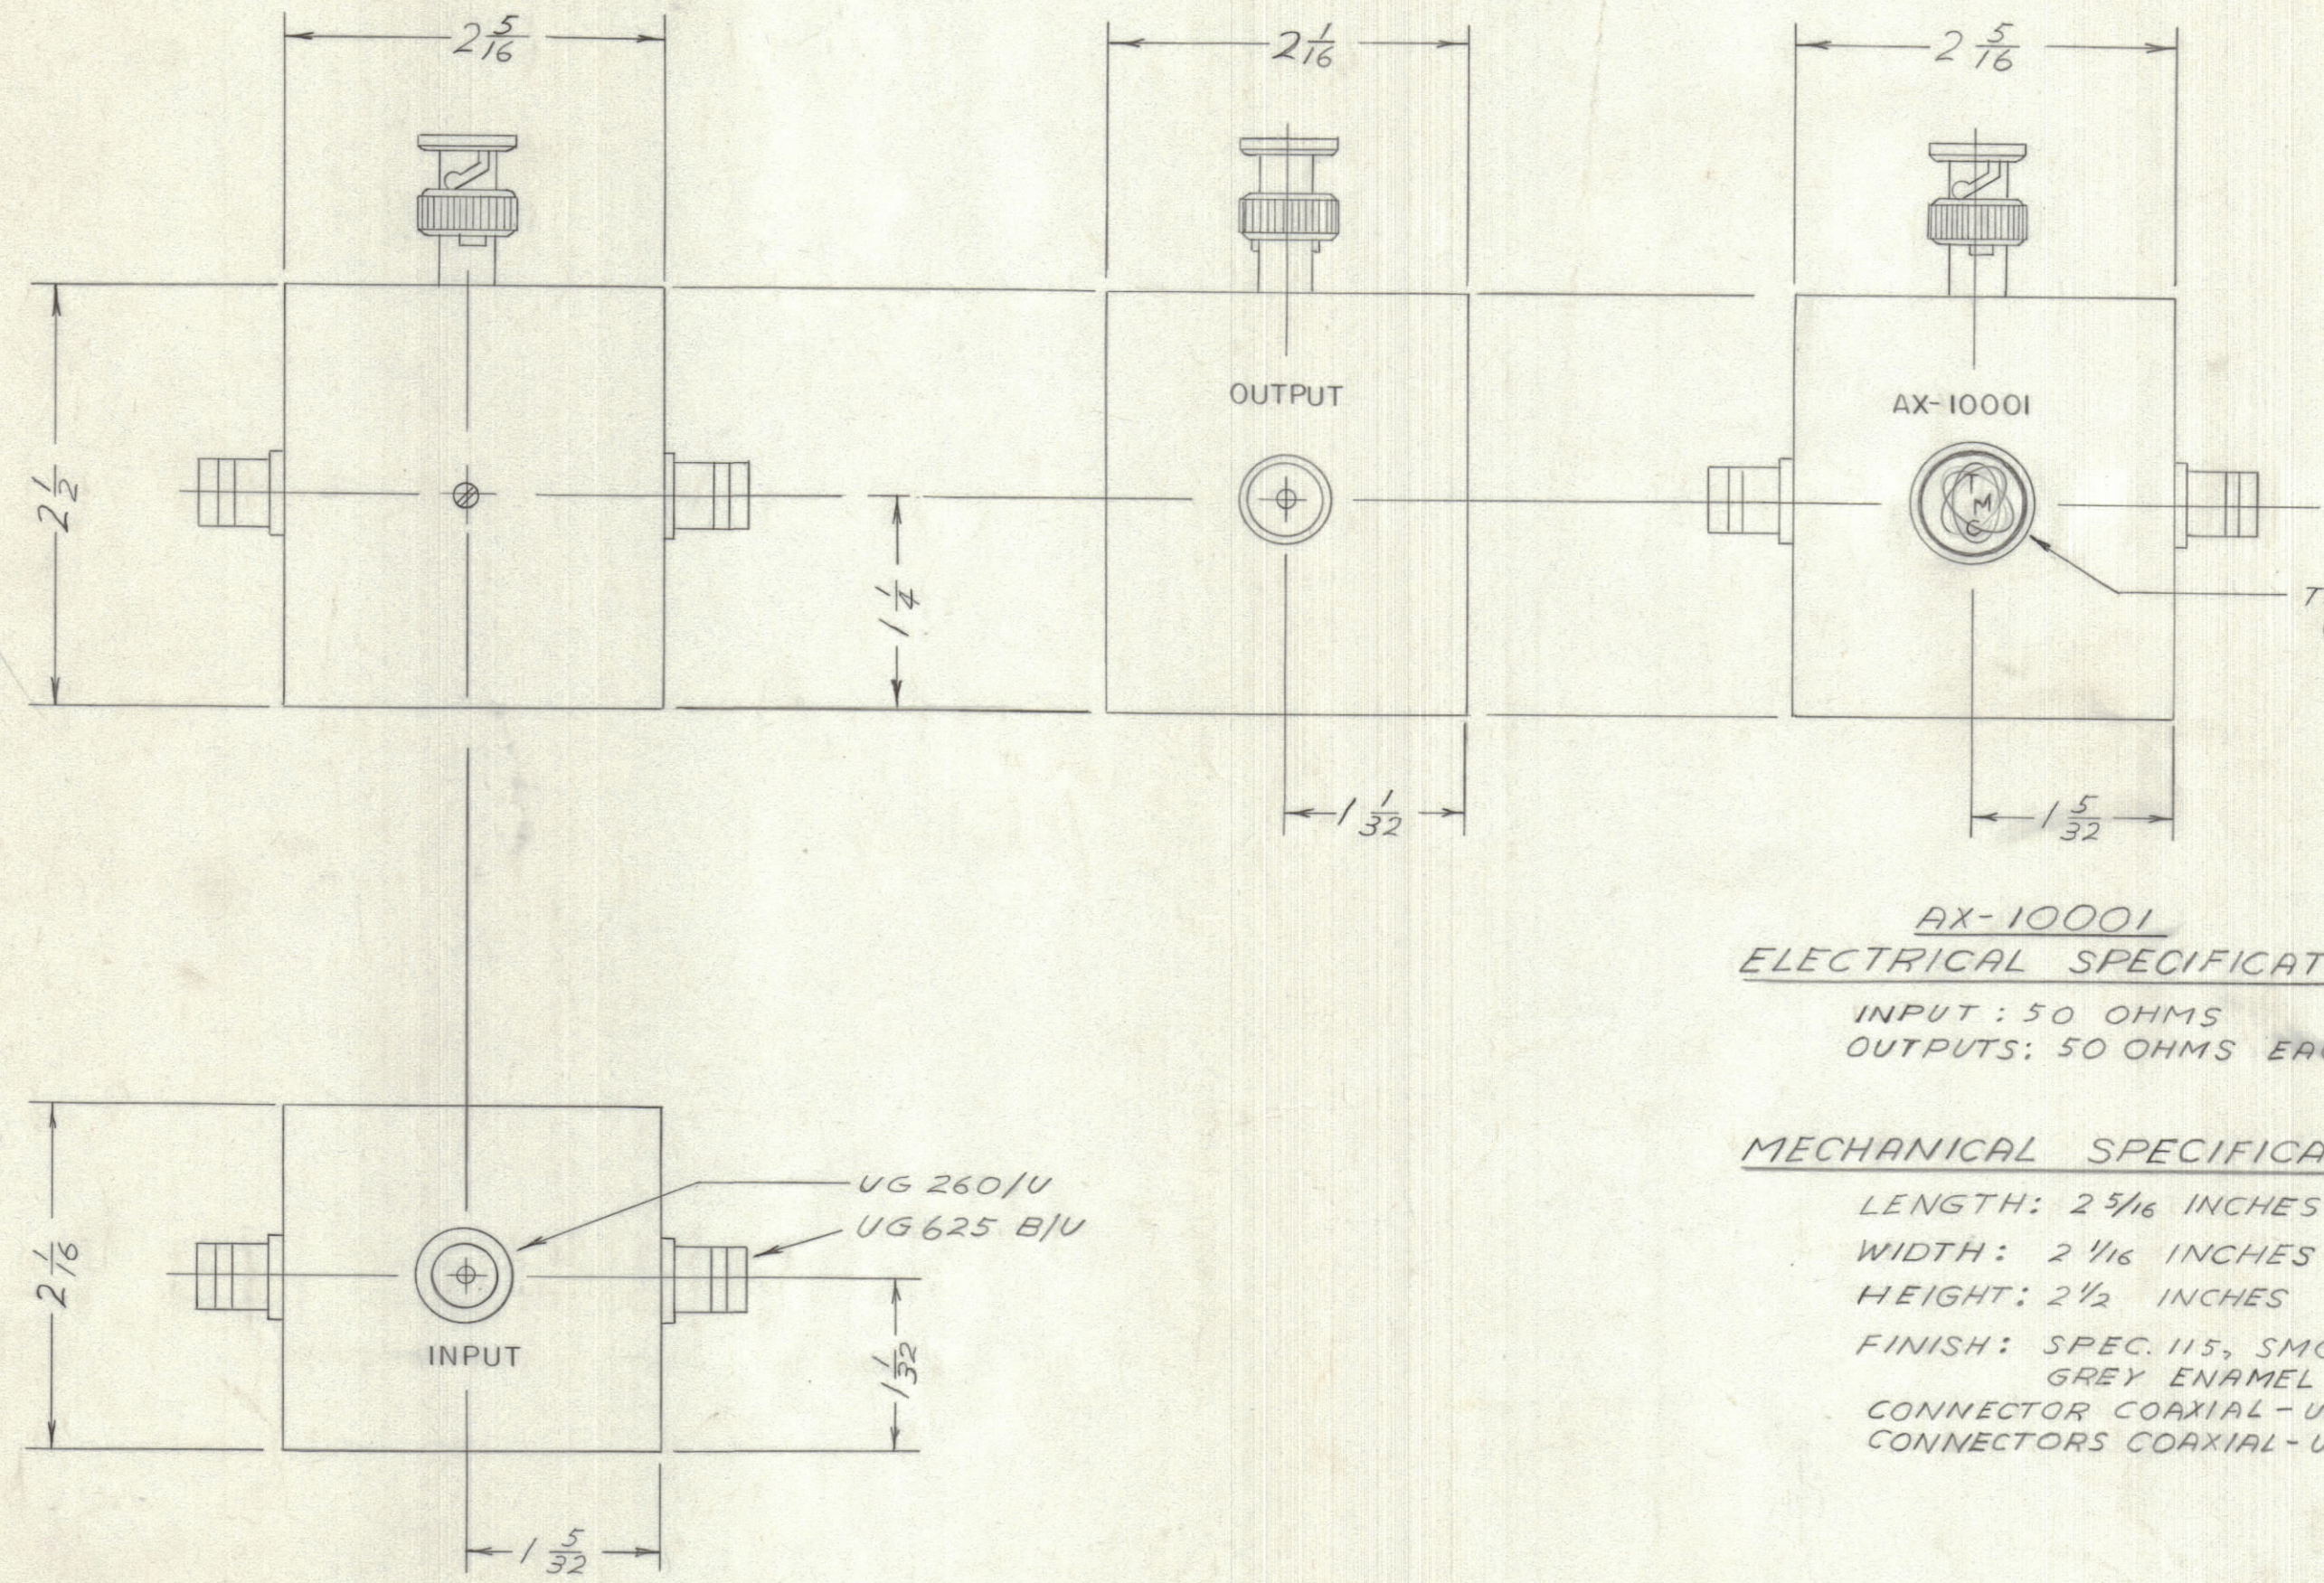

STAMPING TO BE BLACK & 1/8 HIGH

TMC EMBLEM (NP-493)


AX-10001

AX-10001 ELECTRICAL SPECIFICATIONS

INPUT : 50 OHMS
OUTPUTS : 50 OHMS EACH

MECHANICAL SPECIFICATIONS

LENGTH: 2 5/16 INCHES
WIDTH: 2 1/16 INCHES
HEIGHT: 2 1/2 INCHES
FINISH: SPEC. 115, SMOOTH GREY ENAMEL
CONNECTOR COAXIAL - UG 260/U
CONNECTORS COAXIAL - UG 625 B/U

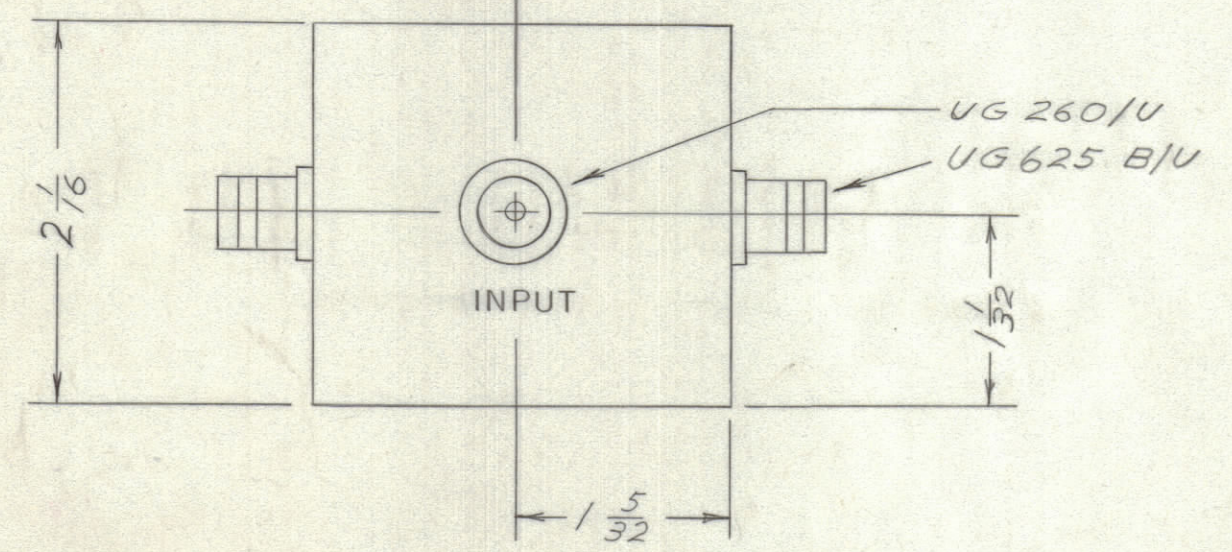

TOLERANCES		SCALE: 2A-10288
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MODEL	PROJECT NO.	ASS'Y. NO.	DATE

STOCK SIZE				TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		WEIGHT PER PC.		SPLITTER PAD	
TYPE & TEMPER		DRAWN		ELEC. DES. APP.	
HEAT TREAT. SPEC.		CHECKED		FINAL APPROVAL	
FINISH & SPEC. NO.				AX-10001	